



VG295250
200 series gas cooktop
Width 90 cm
Natural gas 20 mbar
Wok burner with 6 KW

Control panel for comfortable and secure operation
 Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
 Multi-ring burner of solid, heat-resistant brass as used in professional kitchen
 Solid smooth-surface cast pan supports
 Top appliance in the market, 18 kW on 5 burners

Cooking zones

1 multi-ring wok burner (300 W – 6000 W), suitable for pots up to max. ø 32 cm.
 2 two-ring high output burners (170 W – 4000 W), suitable for pots up to max. ø 28 cm.
 2 two-ring standard burners (170 W – 2000 W), suitable for pots up to max. ø 28 cm.

Handling

Control knobs with illuminated ring.
 Integrated control panel.
 One-handed operation.
 Electric ignition.

Features

Three-part cast pan support with flat, continuous pot surface.
 Brass burner rings.

Safety

Thermoelectric safety pilot.
 Residual heat indication.
 Operation indicator.

Planning notes

No intermediate shelf required.
 Appliance can be snapped into the worktop from above.
 Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.
 Installation in a 90 cm wide lower cabinet is required.
 A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
 With a total connected load of more than 12 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
 Minimum clearance between gas cooktop(s) with more than 12 kW and ventilation hood 70 cm.
 Appliance weight: approx. 29.

Connection

Total connected load gas 18.0 KW.
 Total connected load electric 10.0 W.
 Connecting cable 1.5 m with plug.

Characteristics

Product name/family
 gas hob w integrated controls

Product name/family
 gas hob w integrated controls

Construction type
 Built-in

Construction type
 Built-in

Energy input
 Gas

Energy input
 Gas

Total number of positions that can be used at the same time
 5

Total number of positions that can be used at the same time
 5

Required niche size for installation (HxWxD)
 106 x 885 x 492

Required niche size for installation (HxWxD)
 106 x 885 x 492

Width of the appliance
 914

Width of the appliance
 914

Dimensions
 132 x 914 x 510

Dimensions
 132 x 914 x 510

Dimensions of the packed product (HxWxD)
 290 x 700 x 1010

Dimensions of the packed product (HxWxD)
 290 x 700 x 1010

Net weight
 29.4

Net weight
 29.4

Gross weight
 31.7

Gross weight
 31.7

Residual heat indicator
 Separate

Residual heat indicator
 Separate

Location of control panel
 Hob front

Location of control panel
 Hob front

Basic surface material
 brushed stainless steel

Basic surface material
 brushed stainless steel

Color of surface
 Stainless steel

Color of surface
 Stainless steel

Color of frame
 Stainless steel

Color of frame
 Stainless steel

Approval certificates
 VDE

Approval certificates
 VDE

Length of electrical supply cord
 150

Length of electrical supply cord
 150

EAN code
 4242006294700

EAN code
 4242006294700

Electrical connection rating
 10

Electrical connection rating
 10

Gas connection rating
 18000

Gas connection rating
 18000

Fuse protection
 10

Fuse protection
 10

Voltage
 220-240

Color Variants

VG295250
Width 90 cm
Natural gas 20 mbar

Included accessories


1 x WOK attachment ring.

Optional accessories

WP400001
Wok pan made of multiple-layer material

VG295250
200 series gas cooktop
Width 90 cm
Natural gas 20 mbar
Wok burner with 6 KW

created on 2022-06-14
Page 2

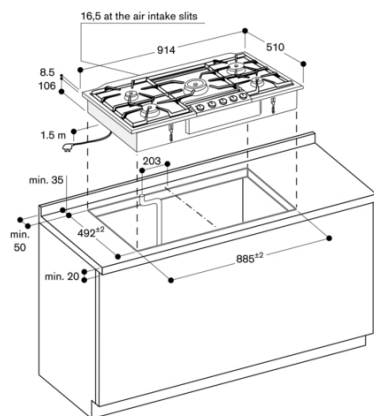

Minimum distance from the appliance cut-out to the side wall 300 mm.

Gas connection

