



#### Color Variants

VG425111F  
Stainless steel  
Width 38 cm

#### Installation Accessories

VA420004  
Connection strip for combination with other Vario appliances of the 400 series for flush installation

VA420010  
Connection strip for combination with other Vario appliances of the 400 series for surface installation

VA440010  
Stainless steel appliance cover with mounting strip

#### VG425111F

Vario gas cooktop 400 series

Stainless steel

Width 38 cm

Liquid gas 28 - 37 mbar

Multi-ring burner with up to 4 kW  
Full electronic power level regulation on 12 levels

Precise and reproducible flame size  
Automatic fast ignition, electronic flame monitoring with automatic re-ignition  
Simmer function for cooking on a very low output level

Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel

For surface installation with a visible edge or for flush installation  
Can be combined perfectly with other Vario appliances of the 400 series

#### Cooking zones

1 two-ring high output burner (165 W – 4000 W), suitable for pots up to max. ø 28 cm.

1 two-ring standard output burner (165 W – 2000 W), suitable for pots up to max. ø 28 cm.

#### Handling

Control knobs with illuminated ring, cooking zone and output level markings.

One-handed operation.

Full electronic control in 12 output levels for exact power level adjustment plus simmer function.

Automatic fast ignition.

#### Features

Simmer function.

Cast pan support with flat, continuous pot surface.

Brass burner rings.

#### Safety

Electronic flame monitoring with automatic re-ignition.

Residual heat indication.

Safety shut-off.

#### Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush installation:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

#### Characteristics

Product name/family

Vario/Domino gas hob

Product name/family

Vario/Domino gas hob

Construction type

Built-in

Construction type

Built-in

Energy input

Gas

Energy input

Gas

Total number of positions that can be used at the same time

2

Total number of positions that can be used at the same time

2

Required niche size for installation

(HxWxD)

134 x 360 x 492

Required niche size for installation

(HxWxD)

134 x 360 x 492

Width of the appliance

380

Width of the appliance

380

Dimensions

158 x 380 x 520

Dimensions

158 x 380 x 520

Dimensions of the packed product

(HxWxD)

300 x 500 x 600

Dimensions of the packed product

(HxWxD)

300 x 500 x 600

Net weight

14.0

Net weight

14.0

Gross weight

16.0

Gross weight

16.0

Residual heat indicator

Separate

Residual heat indicator

Separate

Location of control panel

External control

Location of control panel

External control

Basic surface material

brushed stainless steel

Basic surface material

brushed stainless steel

Color of surface

Stainless steel, Stainless steel

Color of surface

Stainless steel, Stainless steel

Color of frame

Stainless steel, Stainless steel

Color of frame

Stainless steel, Stainless steel

Approval certificates

CE, Eurasian, G-Mark, VDE

Approval certificates

CE, Eurasian, G-Mark, VDE

Length of electrical supply cord

140

Length of electrical supply cord

140

EAN code

4242006261450

EAN code

4242006261450

Electrical connection rating

15

Electrical connection rating

15

Gas connection rating

6000

Gas connection rating

6000

Fuse protection

2

Fuse protection

2

Voltage

220-240

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Special nozzles can be ordered as spare parts.

Plan for an electrical connection (the appliance is not operable without power supply).

Air intake from above.

No intermediate shelf required.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted. If operated next to the downdraft ventilation VL 414, the ventilation moulding AA 414 is recommended to ensure maximum performance of the cooktop.

With a total connected load of more than 12 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. Minimum clearance between gas cooktop(s) with more than 12 kW and ventilation hood 70 cm.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 14.

#### Connection


Total connected load gas 6.0 kW.

Total connected load electric 15.0 W.

Connecting cable 1.4 m with plug.


# GAGGENAU

Installation of the control knob; flush installation

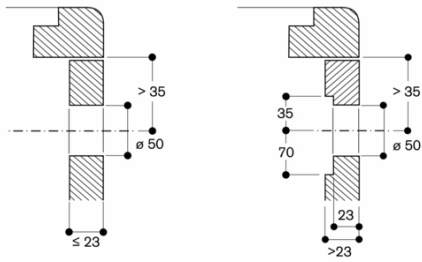


measurements in mm

Installation of the control knob; surface mounting

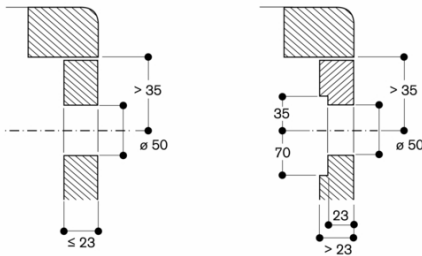


measurements in mm

Installation with appliance cover, surface mounting

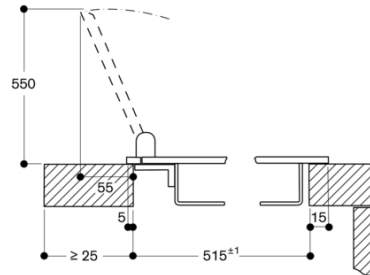


measurements in mm


Installation with appliance cover, flush mounting

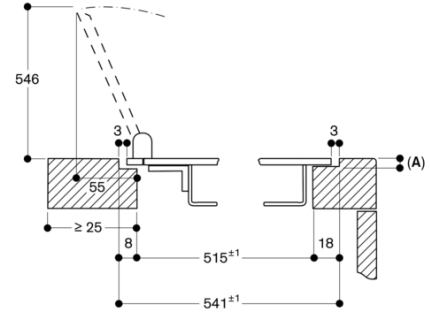

A:  $3.5^{0.5}$   
 measurements in mm

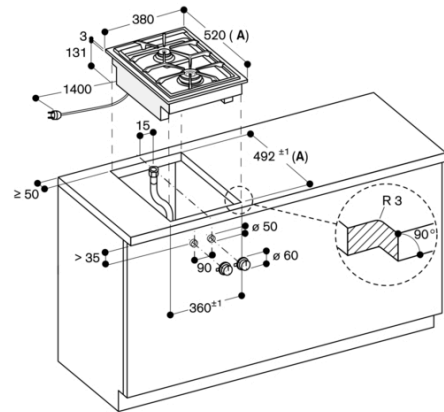


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
 measurements in mm

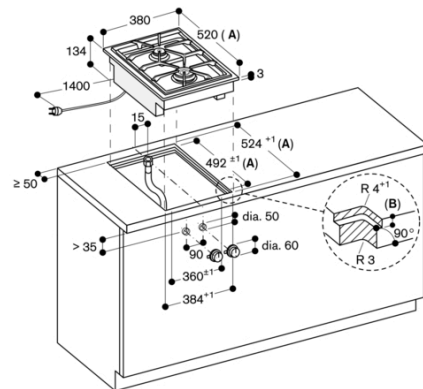

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)  
 B:  $3.5^{0.5}$   
 $6.5^{0.2}$  in combinations with frameless induction hobs  
 measurements in mm


Longitudinal section

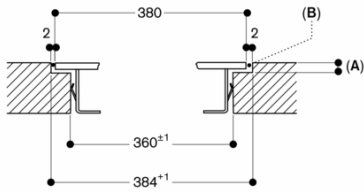

- A:  $3.5^{-0.5}$   
 $6.5^{+0.5}$  in combinations with frameless induction hobs
- B: Fill with silicone

measurements in mm


View from above



- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Cross-section

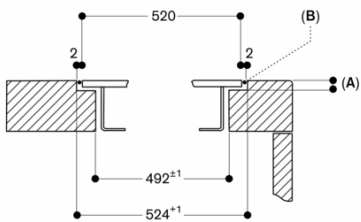


- A:  $3.5^{-0.5}$   
 $6.5^{+0.5}$  in combinations with frameless induction hobs
- B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.


measurements in mm

Installation with appliance cover, surface mounting

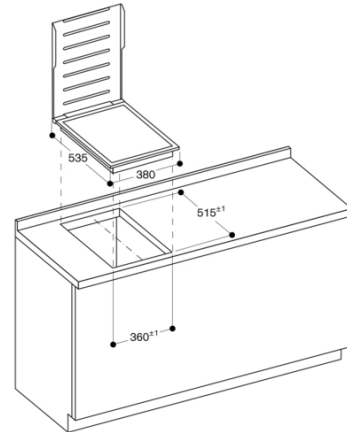

measurements in mm

Installation with appliance cover, flush mounting

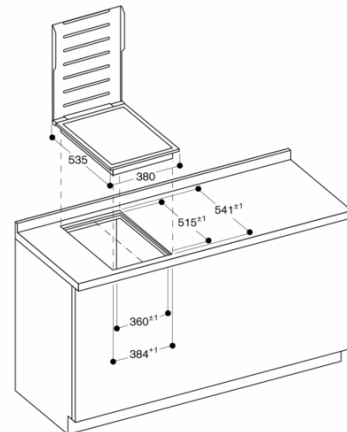

measurements in mm