



<b>VG491111F</b>
<b>Vario gas cooktop 400 series</b>
<b>Stainless steel</b>
<b>Width 90 cm</b>
<b>Liquid gas 28 - 37 mbar</b>

Five multi-ring burners, up to 17.8 kW  
Full electronic power level regulation on 12 levels  
Precise and reproducible flame size  
Automatic fast ignition, electronic flame monitoring with automatic re-ignition  
Simmer function for cooking on a very low output level  
Solid smooth-surface cast pan supports  
Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel  
For surface installation with a visible edge or for flush installation  
Can be combined perfectly with other Vario appliances of the 400 series

**Cooking zones**  
2 two-ring high output burners (165 W – 4000 W), suitable for pots up to max. ø 28 cm.  
2 two-ring standard burners (165 W – 2000 W), suitable for pots up to max. ø 28 cm.

**Handling**  
Control knobs with illuminated ring, cooking zone and output level markings.  
One-handed operation.  
Full electronic control in 12 output levels for exact power level adjustment plus simmer function.  
Automatic fast ignition.

**Features**  
Simmer function.  
Three-part cast pan support with flat, continuous pot surface.  
Brass burner rings.

**Safety**  
Electronic flame monitoring with automatic re-ignition.  
Residual heat indication.  
Safety shut-off.

**Planning notes**  
Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.  
The horizontal positioning of the knobs may be aligned with the specific burners.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush installation:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

<b>Characteristics</b>
<b>Product name/family</b> gas hob w integrated controls
<b>Product name/family</b> gas hob w integrated controls
<b>Construction type</b> Built-in
<b>Construction type</b> Built-in
<b>Energy input</b> Gas
<b>Energy input</b> Gas
<b>Total number of positions that can be used at the same time</b> 5
<b>Total number of positions that can be used at the same time</b> 5
<b>Required niche size for installation (HxWxD)</b> 141 x 887 x 492
<b>Required niche size for installation (HxWxD)</b> 141 x 887 x 492
<b>Width of the appliance</b> 908
<b>Width of the appliance</b> 908
<b>Dimensions</b> 165 x 908 x 520
<b>Dimensions</b> 165 x 908 x 520
<b>Dimensions of the packed product (HxWxD)</b> 300 x 700 x 1010
<b>Dimensions of the packed product (HxWxD)</b> 300 x 700 x 1010
<b>Net weight</b> 31.9
<b>Net weight</b> 31.9
<b>Gross weight</b> 34.7
<b>Gross weight</b> 34.7
<b>Residual heat indicator</b> Separate
<b>Residual heat indicator</b> Separate
<b>Location of control panel</b> External control
<b>Location of control panel</b> External control
<b>Basic surface material</b> brushed stainless steel
<b>Basic surface material</b> brushed stainless steel
<b>Color of surface</b> Stainless steel, Stainless steel
<b>Color of surface</b> Stainless steel, Stainless steel
<b>Color of frame</b> Stainless steel, Stainless steel
<b>Color of frame</b> Stainless steel, Stainless steel
<b>Approval certificates</b> CE, Eurasian, G-Mark, VDE
<b>Approval certificates</b> CE, Eurasian, G-Mark, VDE
<b>Length of electrical supply cord</b> 140
<b>Length of electrical supply cord</b> 140
<b>EAN code</b> 4242006261535
<b>EAN code</b> 4242006261535
<b>Electrical connection rating</b> 15
<b>Electrical connection rating</b> 15
<b>Gas connection rating</b> 17800
<b>Gas connection rating</b> 17800
<b>Fuse protection</b> 2
<b>Fuse protection</b> 2
<b>Voltage</b> 220-240

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Special nozzles can be ordered as spare parts.  
Plan for an electrical connection (the appliance is not operable without power supply).  
Air intake from above.  
No intermediate shelf required.  
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.  
A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
Installation in a 90 cm wide lower cabinet is required.  
The combination with VL 414 is not recommended, since the air extraction from the centre burner cannot be guaranteed due to the distance.  
With a total connected load of more than 12 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.  
Minimum clearance between gas cooktop(s) with more than 12 kW and ventilation hood 70 cm.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 32.

**Connection**  
Total connected load gas 17.8 kW.  
Total connected load electric 15.0 W.  
Connecting cable 1.4 m with plug.


**Color Variants**  
VG491111F  
Stainless steel  
Width 90 cm

**Included accessories**  
1 x WOK attachment ring.

**Optional accessories**  
WP400001  
Wok pan made of multiple-layer material


**Installation Accessories**  
VA420004  
Connection strip for combination with other Vario appliances of the 400 series for flush installation  
VA420010  
Connection strip for combination with other Vario appliances of the 400 series for surface installation

Installation of the control knob; flush installation

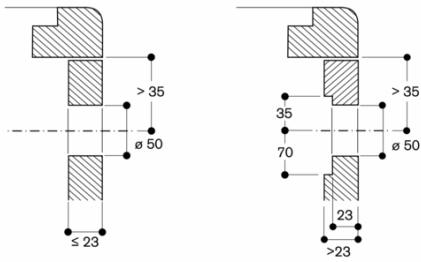


measurements in mm


Installation of the control knob; surface mounting

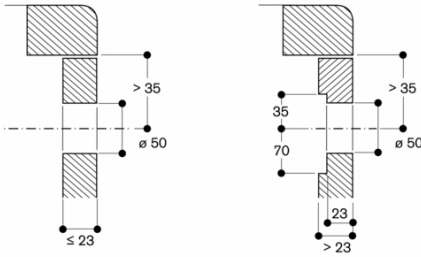

measurements in mm

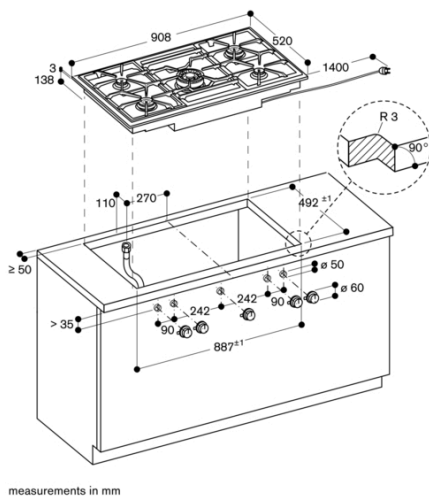


measurements in mm

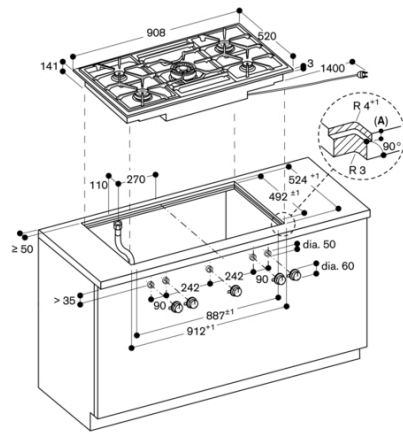

A:  $3.5^{+0.5}$   
 $6.5^{+0.5}$ in combinations with frameless induction hobs  
 measurements in mm


Cross-section

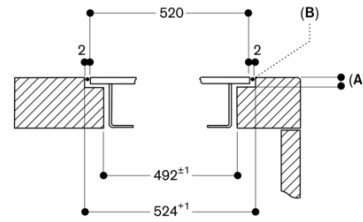

A:  $3.5^{+0.5}$   
 $6.5^{+0.5}$ in combinations with frameless induction hobs  
 B: Fill with silicone

measurements in mm

View from above

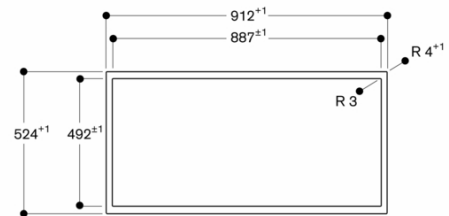

measurements in mm

VG491111F

Vario gas cooktop 400 series

Stainless steel


Width 90 cm

Liquid gas 28 - 37 mbar

created on 2022-06-14

Page 3

Longitudinal section

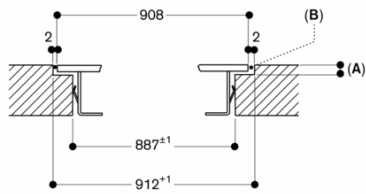

A:  $3.5^{+0.5}$   
 $6.5^{+0.5}$  in combinations with frameless induction hobs

B: Fill with silicone

measurements in mm