



VI414105

Optional accessories

GP900001:

System pan diameter 15 cm

GP900002:

System pan diameter 19 cm

GP900003:

Frying sensor pan Ø 21 cm

GP900004:

System pan diameter 28 cm

WP400001:

Wok pan

WZ400000:

Wok ring

Installation Accessories

CKI410000:

1 knob, induction, black

CKI410010:

1 knob, induction, stainless steel

VA420004:

Connecting strip Serie 400, flush, short

Vario induction cooktop 400 series

38 cm

VI414105

- Solid stainless steel knob, also in black robust finishing, for precise control and personalisation
 - Can be combined perfectly with other Vario appliances of the 400 series
 - Flush-Top Frame installation: seamless transition of hob and worktop makes cleaning easier and integrates the hob beautifully
 - 32 cm cooking zone with booster function
- Frameless for flush installation
Ideal for the original wok pan with round bottom, with wok ring
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic power control in 12 stage (1...12).
User friendly control with two color display (white / orange).

Features

Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.

Selected digital services (Home Connect)

Cooktop-based ventilation control (with suitable hood).
Remote monitoring.
Remote diagnostics.
Integrated WiFi module for digital services (Home Connect).
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Safety

Operation indicator.
Pot detection.
2 stage Hh residual heat indicator for each zone
Safety shut-off.

Planning notes

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out. If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories (order as spare parts):

Part No. 17006018 Frying sensor pan, ø 20 cm

Part No. 17006184 Frying sensor pan, ø 24 cm

Part No. 17006185 Frying sensor pan, ø 28 cm

Part No. 17006019 Frying sensor pan, ø 32 cm

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 8.

Connection


Total connected load 3.7 KW.

Connecting cable 1.5 m without plug.


Power consumption standby/display off 0.5 W.

Power consumption standby/network 1.4 W.

Please check the user manual for how to switch off the WiFi module.

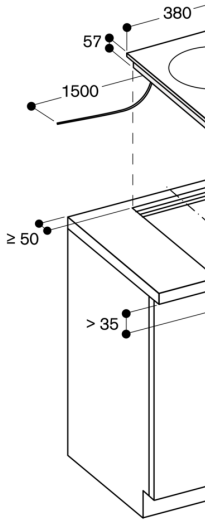


View from above



measurements in mm


Longitudinal section



A: 6.5^{+0.5}
B: 1.5
C: Fill with silicone


measurements in mm

Installation of the contr



measurements in mm

Cross-section



A: 6.5^{+0.5}
B: 1.5
C: Fill with silicone

measurements in mm

A: 6.5^{+0.5}

measurements in mm