



**VI492111**  
**Vario flex induction cooktop 400 series**  
**Stainless steel frame**  
**Width 90 cm**

Flex function for combining the rectangular cooking areas  
 Free positioning of cookware inside combined cooking areas  
 Frying sensor function for temperature control in pans  
 Large cooking zone for pots up to ø 32 cm  
 Ideal for the original wok pan with round bottom, with wok ring  
 Easy control of all functions with two color displays  
 Solid stainless steel control knob  
 Precision crafting of 3 mm stainless steel  
 For surface installation with a visible edge or for flush installation  
 Can be combined perfectly with other Vario appliances of the 400 series

**Cooking zones**  
 2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).  
 1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

**Handling**  
 Control knobs with illuminated ring, cooking zone and output level markings.  
 Electronic power control in 12 stage (1...12).  
 User friendly control with two color display (white / orange).

**Features**  
 Flex function for rectangular cooking areas.  
 Frying sensor function.  
 Booster function.  
 Stopwatch.  
 Short-term timer.  
 Options menu.

**Safety**  
 Individual residual heat indicators.  
 Safety shut-off.

**Planning notes**  
 The horizontal positioning of the knobs may be aligned with the specific cooking areas and zones.  
 If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush installation:  
 Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
 The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

**Characteristics**  
**Product name/family**  
 Cooking zone ceramic  
**Construction type**  
 Built-in  
**Energy input**  
 Electric  
**Total number of positions that can be used at the same time**  
 5  
**Type of control setting devices**  
**Required niche size for installation (HxWxD)**  
 57 x 885-889 x 490-494  
**Width of the appliance**  
 908  
**Dimensions**  
 57 x 908 x 520  
**Dimensions of the packed product (HxWxD) (mm)**  
 111 x 1109 x 712  
**Net weight (kg)**  
 24.752  
**Gross weight (kg)**  
 26.8  
**Residual heat indicator**  
 Separate  
**Location of control panel**  
 External control  
**Type of external control possibility**  
**Basic surface material**  
 Ceramic  
**Color of surface**  
 Black, Stainless steel  
**Color of frame**  
 Stainless steel  
**Approval certificates**  
 AENOR, CE  
**Length of electrical supply cord (cm)**  
 150  
**EAN code**  
 4242006261320  
**Electrical connection rating (W)**  
 11100  
**Gas connection rating (W)**  
**Current (A)**  
**Voltage (V)**  
 220-240  
**Frequency (Hz)**  
 60; 50

**Consumption and connection features**  
 created on 2021-02-24  
 Page 1

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
 If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
 Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
 Appliance can be snapped into the worktop from above.  
 Appliance weight: approx. 25.

**Connection**  
 Total connected load 11.1 KW.  
 Connecting cable 1.5 m without plug.

**Color Variants**

**VI492111**  
**Stainless steel frame**  
**Width 90 cm**


**Optional accessories**

**GP900001**  
**Stainless steel frying sensor pan**  
**GP900002**  
**Stainless steel frying sensor pan**  
**GP900003**  
**Stainless steel frying sensor pan**  
**GP900004**  
**Stainless steel frying sensor pan**  
**WP400001**  
**Wok pan made of multiple-layer material**  
**WZ400001**  
**Wok attachment for wok pan**

**Installation Accessories**


**VA420000**  
**Connection strip for combination with other Vario appliances of the 400 series for flush installation**  
**VA420010**  
**Connection strip for combination with other Vario appliances of the 400 series for surface installation**

Cross-section

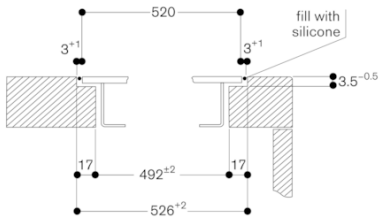



When installing with appliance cover or filler strip, pay attention to the deeper cut-out and the front and rear groove width.

View from above

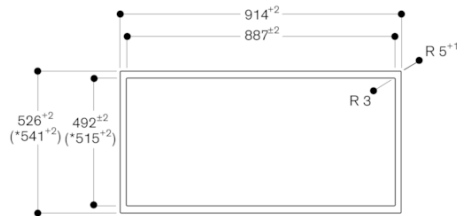


\* with filler strip

Longitudinal section

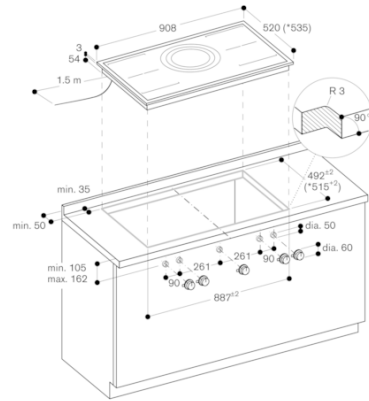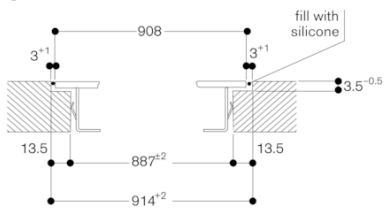


\* with filler strip.  
 For further installation options, see the installation instructions.

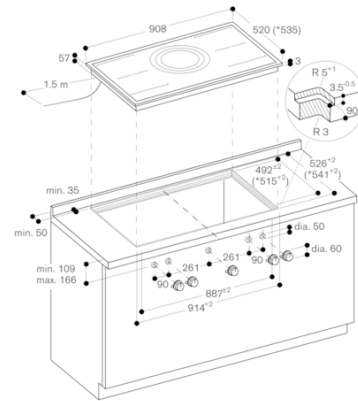


\* with filler strip  
 For further installation options, see the installation instructions.

Installation of the control knob; flush installation

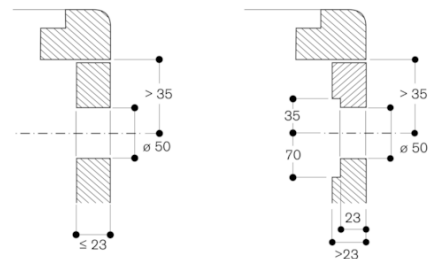

measurements in mm

Installation of the control knob; surface mounting

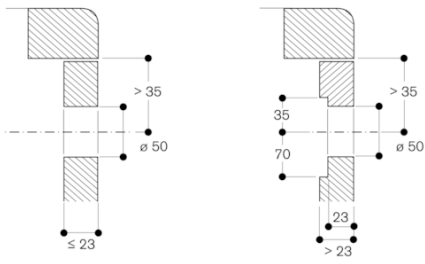

measurements in mm