



Downdraft ventilation 400 series
With frame for flush mounting
Width 11 cm
Air extraction/recirculation
For combination within the sets CVL 410 and CVL 420



Highly efficient ventilation system close to the cooktop
Motorless, can be combined with Gaggenau BLDC remote fan units

Output

Power levels depend on the remote fan unit.

Features

Manual opening of the ventilation element.
Closing element made of stainless steel, dishwasher-safe.
Metal grease filter, dishwasher-safe.
No duct connection piece included.

Product rating

Consumption data is referred to a configuration with the remote fan unit AR 403 122.
Energy consumption 53.2 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class C.
Sound level min. 56 dB / max. 68 dB normal mode.

Planning notes

For combination within the sets CVL 410 and CVL 420.
Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the hood's power supply line needs to feature a suitable safety switch.

Connection

Connection cable 2.0 m between ventilation element VL 410 and control knob AA 490.

Characteristics

Product name/family
Color chimney
Typology
Approval certificates
CE, Eurasian, VDE
Length of electrical supply cord (cm)
Required niche size for installation (HxWxD)
170mm x 90.0mm x 492mm
Height of the chimney (mm)
Height of product, without chimney (mm)
Minimum distance above an electric hob
Minimum distance above a gas hob
Net weight (kg)
2.765
Type of control
Electronic
Number of speed settings
Maximum output air extraction (m³/h)
540
Boost position output recirculating (m³/h)
Maximum output recirculating air (m³/h)
470
Boost position air extraction (m³/h)
Number of lights (Stck)
Noise level (dB(A) re 1 pW)
68
Diameter of air outlet (mm)
150
Grease filter material
Washable stainless steel
EAN code
4242006278380
Connection rating (W)
Current (A)
Voltage (V)
220-240
Frequency (Hz)
50-60
Plug type
Installation type
Built-in

Consumption and connection features

created on 2021-05-29
Page 1

Color Variants

VL410111
Width 11 cm
Air extraction/recirculation

Optional accessories

AA400510
Window contact switch

Downdraft ventilation 400 series

With frame for flush mounting



Width 11 cm

Air extraction/recirculation

For combination within the sets CVL 410 and CVL 420

created on 2021-05-29

Page 2

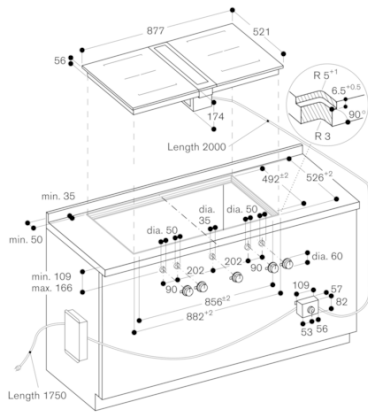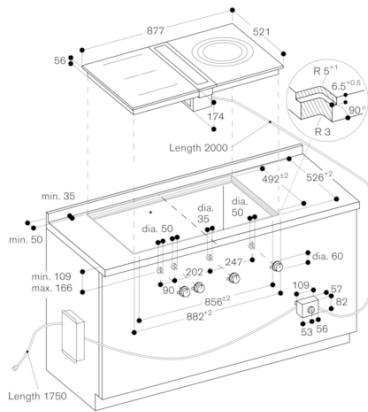

GAGGENAU