

WS061102

warming drawer 400 series  
60 x 14 cm  
WS061102

- Hygienic stainless steel interior with glass bottom
- Power level from 30° to 80°
- For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting

– Integrable in 14 cm high niche

Cushioned closing system

Hygienic stainless steel interior with glass bottom

Direct temperature selection in the range 30 °C to 80 °C.

For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting

#### Heating methods

Slow cooking.

Keeping meals warm.

Warming ovenware.

Cups and plates warming.

Direct temperature control.

Personalisation function via Home Connect.

16 additional programmes via Home Connect.

#### Handling

Touch key operation.

#### Features

Net volume 20 litres.

Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.

Capacity load max. 25 kg.

Usable interior dimensions

W 547 mm x H 91 mm x D 410 mm.

Heating system for even heat distribution and stable cavity temperature.

Status display, visible in the glass front.

Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.

Remote control and monitoring.

Timing function.

Integrated WiFi module for digital services (Home Connect).

The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: [www.home-connect.com](http://www.home-connect.com)

#### Planning notes

Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.

The thickness of the furniture panel is at least 19 mm.

The width of the furniture panel is 590-596 mm.

The recommended height of the furniture panel is 142-156 mm.


Front weight up to 3 kg.

The socket can be planned behind the appliance.

#### Connection

Total connected load 0.82 KW.

Connection cable 1.75 m, pluggable.

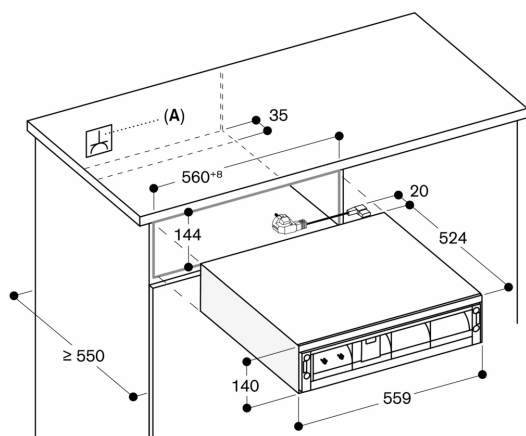

A: Socket

Measurements in mm