



AC270101

AA200121:

Active charcoal filter f. AC230/AC270101

AA200122:

Activated charcoal filter regenerative

ceiling cooker hood 200 series

105 cm, Black

AC270101

Energy-saving, low-noise fan

Rim extraction

Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours

Dimmable, neutral white LED light for ideal illumination of the whole cooktop

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591. Sound power level according to EN 60704-3. Sound pressure level according to EN 60704-2-13. Odour reduction for air recirculation in accordance with EN 61591.

Features

3 electronically controlled power levels and 1 intensive mode.

Remote control is included in delivery.

Automatic function with sensor-controlled run-on function.

Interval ventilation, 6 min.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Filter is suitable for the preparation of fish and seafood due to special treatment.

Fan technology with highly efficient, brushless DC motor (BLDC).

Neutral white LED light (3500 K), continuously dimmable.

Lamp output 6 x FM5-02_LED_3W.

Cooktop-based ventilation control (with suitable cooktop).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Planning notes

The ceiling ventilation has to be handled as a room ventilation when distance to cooktop is larger than 120 cm since the direct capture of vapours will be limited.

A suitable load-bearing substructure is required for securing the extractor hood. Never fit the appliance directly onto plasterboard or similar lightweight construction materials.

Clearance above electric appliances min. 70 cm.

Appliance weight: approx. 67.


Connection

Total connected load 250 W.

Plan a connection cable.


Power consumption standby/display off 0.4 W.

Please check the user manual for how to switch off the WiFi module.

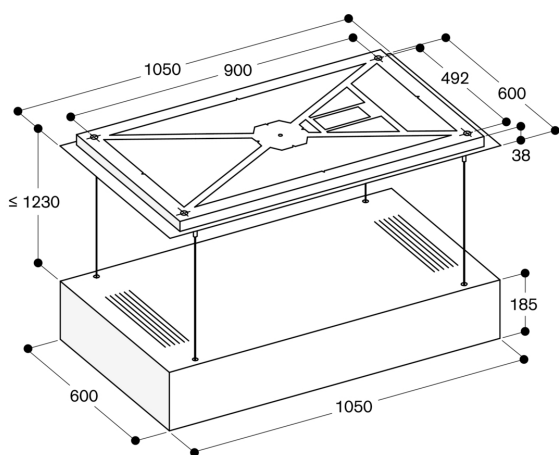

measurements in mm

Flush integration in the ceiling

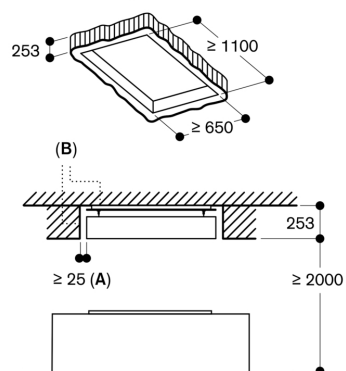

A: ≥ 25 mm all around

B: Depending on the cooking method, residual moisture may escape from the ceiling ventilation even after use. For preventive purposes, we recommend treating the recess in the ceiling with an anti-mould paint.

measurements in mm