



CG291210

WP400001:  
Wok pan

Gas cooktop 200 series  
90 cm, Nat gas H/E/(L) 20 (25) mbar  
**CG291210**

Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size  
Multi-ring burner with up to 5 KW

**Cooking zones**

1 multi-ring wok burner (300 W – 5000 W).  
1 high output burner (500 W - 3000 W), suitable for pots up to max. ø 26 cm.  
2 standard burners (350 W – 1750 W), suitable for pots up to max. ø 20 cm.  
1 economy burner (330 W – 1000 W), suitable for pots up to max. ø 14 cm.

**Handling**

Control knobs with cooking zone and output level markings for 9 levels.  
One-handed operation.  
Electric ignition.

**Features**

Three-part cast iron pan support with continuous pot surface.  
Enamelled burner cover.

**Safety**


Thermoelectric safety pilot.

**Planning notes**

The cooktop can be surface-mounted.  
Special nozzles can be ordered as spare parts.  
Installation in a 85 cm niche or a 88 cm niche with the included spacers.  
Air intake from above.  
Intermediate shelf is required.  
Appliance must be fixed from underneath.  
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.  
Appliance weight: approx. 17.

**Connection**

Total connected load gas 12.5 KW.  
Connecting cable 1.00 m without plug.

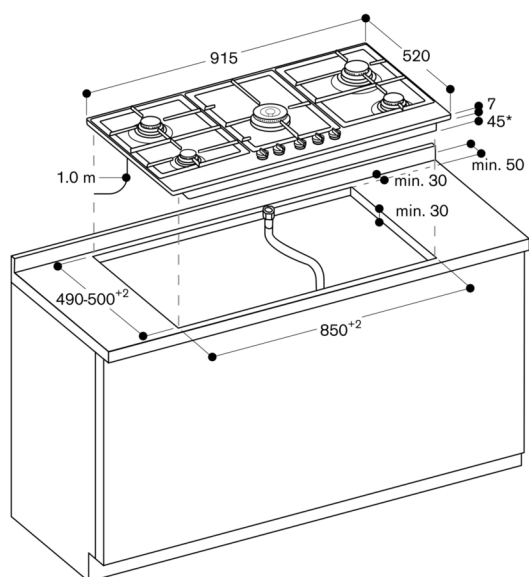

\* 61 mm in the area of the  
gas connection at the back right