



Color Variants

CMP250111
Full glass door in Gaggenau Metallic
Width 60 cm

Included accessories

1 x assembly screws.
 1 x scoop.
 1 x test strip.
 1 x milk container (insulated).
 1 x connection hose for milk frother.
 1 x milk pipe.

CMP250111
Fully automatic espresso machine 200 series
Full glass door in Gaggenau Metallic
Width 60 cm
Controls at the top

Handless door / cushioned door closing system
 Continuous flow heater means no waiting time and constant brewing temperature
 Aroma brewing technology for a full aroma
 Single portion cleaning
 TFT touch display
 Panel-free appliance with surface control module
 One-touch operation
 Personalisation function
 7 light settings
 Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
 Espresso / 2 x Espresso.
 Espresso Macchiato / 2 x Espresso Macchiato.
 Coffee / 2 x Coffee.
 Americano / 2 x Americano.
 Caffè Latte / 2 x Caffè Latte.
 Latte Macchiato / 2 x Latte Macchiato.
 Cappuccino / 2 x Cappuccino.
 Flat White / 2 x Flat White.
 Milk froth / 2 x Milk froth.
 Warm milk / 2 x Warm milk.
 Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.
 Rotary knob and TFT touch display operation.
 Clear text display.
 Personalisation function, option to save 8 individualised beverages.
 4 beverage size settings, volume can be individually adjusted to match the size of the cup.
 8 coffee strength levels from very mild to extra strong.
 Coffee: 3 grades.
 Hot water: 10 grades.
 4 coffee-milk ratio levels.
 Adjustable grinding level.
 Height-adjustable coffee dispenser 7 cm to 15 cm.
 Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
 Separate drawer for second ground coffee type.
 Water pump with 19 bar pressure.
 Double grinding and brewing cycles for extra intensity for single beverage order.
 For double beverage order, two grinding and brewing cycles.
 Beverage dispenser with integrated milk system.
 Insulated stainless steel milk container for up to 0.5 litres.
 Integrated lightning with LEDs.
 Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
 Automatic adjustment of ground coffee quantity.
 Removable 2.4 litre water tank.
 Electronic water filter exchange indicator.

Characteristics

Built-in / Free-standing
 Built-in

Frothing nozzle
 No

Display
 No

Water protection system
 no

Portion sizes
 All cups

Dimensions
 455 x 590 x 426

Dimensions of the packed product (HxWxD)
 550 x 480 x 670

Required niche size for installation (HxWxD)
 449 x 558 x 356

Hot water spout
 No

Adjustable programs

Standby function
 Yes

Pump pressure
 19

Simultaneous preparation of 2 cups
 Yes

Included accessories
 1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe

Optional accessories

Electrical connection rating
 1600

Fuse protection
 10

Voltage
 220-240

Frequency
 50/60

Plug type
 Gardy plug w/ earthing

Product group
 Built-in coffee machine

Brand
 Gaggenau

Product name/family

Product name / Commercial code
 CMP250111

Universal Product Code

Main colour of product
 Metallic

Typology
 fully automatic

Australia Standards, CE, Eurasian, G-Mark, Morocco, Ukraine, VDE

Length electrical supply cord
 170.0

Length of electrical supply cord (in)

Recommened height for installation (in)

Recommened height for installation
 449

Appliance Dimensions (h x w x d) (in)

Dimensions
 455 x 590 x 426

Dimensions of the packed product

Dimensions of the pallet (in)

Dimensions of the packed product (HxWxD)
 550 x 480 x 670

44

Net weight
 20.144

50

Gross weight
 22.9

Capacity water container
 2.4

Consumption and connection features

2021-11-22
 Page 1

Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.

Cleaning


Fully automatic rinse programme when machine is turned on/off.
 Automatic steam cleaning of the milk system after every beverage.
 Automatic cleaning and descaling programme.
 Emptying programme to prepare the appliance for holiday or transportation.
 Empty-grinding function to remove coffee residues from the system when switching bean types.
 Removable brewing unit.
 Dishwasher-safe coffee residue container and drip tray.
 Dishwasher-safe beverage dispenser.

Planning notes


Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
 Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 When installing in a corner a side clearance is required.
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
 Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
 Special accessories (order as spare parts):
 Part No. 17000705 Water filter
 Part No. 00311819 Descaling tablets
 Part No. 00311769 Cleaning tablets
 Part No. 00636455 Door hinge restrictor (92° opening angle)
 Part No. 11015223 Bean container with lid

Connection

Total connected load 1.6 KW.

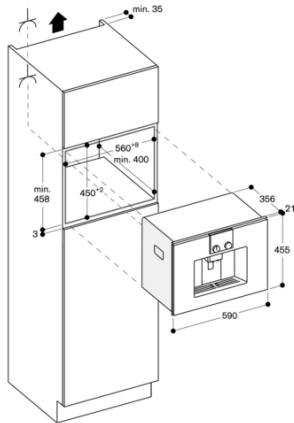

Left corner installation

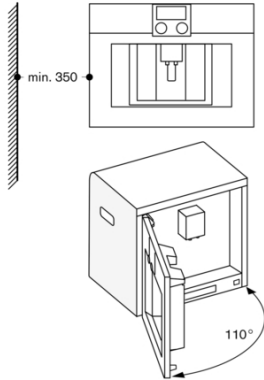

If using the 92° door hinge restrictor (spare part no. 00636455),
the minimum distance from the wall is only 100 mm.