DF250141
Dishwasher 200 series
Fully integrated
Height 81.5 cm, width 45 cm

Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
6 programmes with aqua sensor and 2 options, Power and Intensive:
Clean and dry dishes in 65 minutes
Intensive cleaning in the lower basket while protecting glassware in the upper basket
Flexible basket system including cutlery drawer for optimal loading
Remaining time projection onto the kitchen floor
Bright interior lighting
Very quiet: 44 dB
Energy efficiency class A+++

Handling
Display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Remaining time projection.

Technical Features
Bright interior lighting.
Glass protection with zeolite.
Aqua sensor.
Load sensor.
Automatic detergent function.
Regeneration electronics
Heat exchanger.
speedMatic hydraulic system
Triple filter system.
Soft lock.

Programmes
6 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Standard Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.
2 options:
Intensive.
Power.

Features
Flexible basket system.
Cutlery drawer.
Upper basket:
Rackmatic with 3 levels, adjustable in height up to 5 cm.
3 folding spines.
1 folding rack.
Lower basket:
4 folding spines.
1 folding rack.
Glass support.
Cutlery basket.
Maximum dish sizes (upper/lower basket)
19/25, 16.5/27.5 or 14/31 cm respectively.
10 place setting capacity.

Consumption data
Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
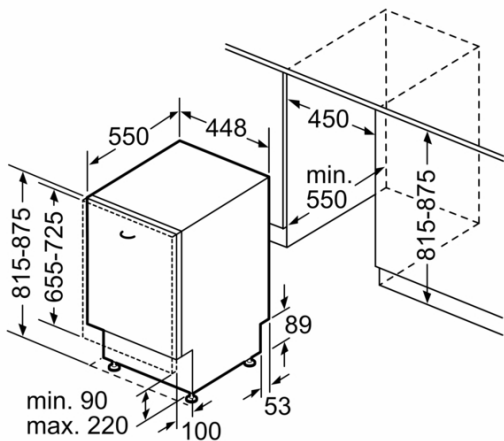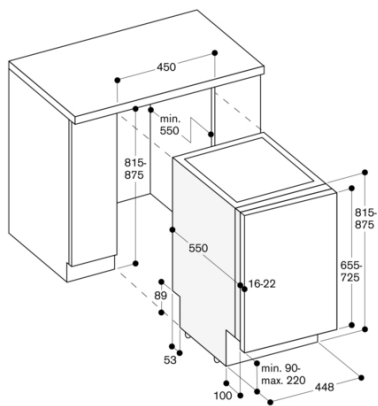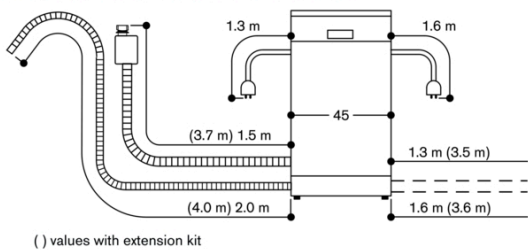From 9.5 l water.
From 0.66 kWh.
Noise level 44 dB (re 1 pW).

Planning notes
Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).

Color Variants
DF250141
Fully integrated
Height 81.5 cm, width 45 cm

Included accessories
1 x baking tray spray head.

Characteristics

Energy Efficiency Class (Regulation (EU) 2017/1369)	D
Energy Consumption for 100 cycles Eco Programme (EU 2017/1369)	67
Maximum number of place settings (EU 2017/1369)	10
The water consumption of the eco programme in liters per cycle (EU 2017/1369)	9.5
Programme duration (EU 2017/1369)	3:15
Airborne acoustical noise emissions (EU 2017/1369)	44
Airborne acoustical noise emission class (EU 2017/1369)	B
Energy efficiency class	
Cleaning performance	A
Water consumption	9.5
Total annual energy consumption	
Total annual energy consumption 220 days	145
Total annual water consumption 220 days	2090
Built-in / Free-standing	Built-in
Removable top	No
Door panel options	Not possible
Height of removable worktop	0
Height of the product	815
Adjustable feet	Yes - all from front
Maximum adjustability feet	60
Adjustable plinth	
Net weight	40.745
Gross weight	42.5
Connection Rating	
Fuse protection	10
Voltage	220-240
Frequency	50; 60
Approval certificates	CE, VDE
Length electrical supply cord	175
Plug type	Gardy plug w/ earthing
Length inlet hose	165
Length outlet hose	205
Hidden heating element	Yes
Water protection system description	Triple water protection 24h
Child saftety devices	No
Water softener	Yes
Top basket type	
Adjustable upper basket	Rackmatic 3-stage
Upper rack cup shelf	1
Bottom basket type	
Cup Shelf	1
3rd Rack	3rd Rack 2.1
Cutlery Basket	Standard
Optional accessories	DA042030
Included accessories 2	

To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front).
The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.
Rear feet adjustable at front.
Door weight up to 7.5 kg.
Door panel dimension dependent on plinth height of kitchen furniture.

Connection
Total connected load <201300convert(kW)>.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.

GAGGENAU

DF250141
Dishwasher 200 series
Fully integrated
Height 81.5 cm, width 45 cm

2021-11-23
Page 2

Connection dimensions for a 45 cm wide dishwasher

1.3 m   1.6 m

45

(3.7 m) 1.5 m

1.3 m (3.5 m)

(4.0 m) 2.0 m

1.6 m (3.6 m)

( ) values with extension kit

450

min. 550

815-875

550

815-875

16-22

655-725

89

53

min. 90-max. 220

100

448

550   448   450

min. 550

815-875   655-725   815-875

89

min. 90
max. 220   100   53

measurements in mm

GAGGENAU