



DF250160

1 x baking tray spray head

DA041061:
Cutlery Drawer

DA042030:
Silver polishing cassette

DA043000:
Holder for long-stemmed glasses

DA043060:
Rack insert for stemware dishwasher

DA020010:
Compensating + fixing kit, stainl. steel

DA021000:
Retractable hinge f. high corpus dimens.

DA231010:
Attachment door, ss/glass 81,5cm

GH045010:
Handle ss 45 cm

GZ010011:
inlet and outlet hose extention

fully-integrated dishwasher 200 series 60 cm DF250160

6 programmes with aqua sensor and 2 options, Power and Intensive:
Clean and dry dishes in 59 minutes Intensive cleaning in the lower basket while protecting glassware in the upper basket
TFT display for intuitive handling of all functions
Bright interior lighting
Very quiet: 44 dB
Energy efficiency class A++
Aqua stop with guarantee

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indications.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Info-Light.

Technical Features

Bright interior lighting.
Glass protection.
Aqua sensor.
Load sensor.
Automatic detergent function.
Regeneration electronics
Heat exchanger.
speedMatic hydraulic system
Triple filter system.
Soft lock.
Aqua stop with guarantee.
Child lock.

Programmes

6 programmes:
Auto 35 °C - 45 °C. Auto 45 °C - 65 °C. Auto 65 °C - 75 °C. Standard Eco 50 °C. Quick wash 45 °C (29 min.). Pre-rinse.
2 options:
Intensive. Power.

Features

Flexible basket system.
Upper basket:
Rackmatic with 3 levels, adjustable in height up to 5 cm. 2 folding spines. 2 folding racks. 1 knife rack.
Lower basket:
4 folding spines.
Cutlery basket.
Maximum dish sizes (upper/lower basket)
27/25, 24.5/27.5 or 22/31 cm respectively.
13 place setting capacity.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
From 9.5 l water.
From 0.92 kWh.
Noise level 44 dB (re 1 pW).

Planning notes

Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 8.5 kg.


Door panel dimension dependent on plinth height of kitchen furniture.
For installation into a tall unit, ventilation openings are recommended (min. 200 cm²).

Connection

Total connected load <201300convert(kW)>.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.

81.5 cm high dishwasher

Connection dimensions for a 60 cm wide dishwasher

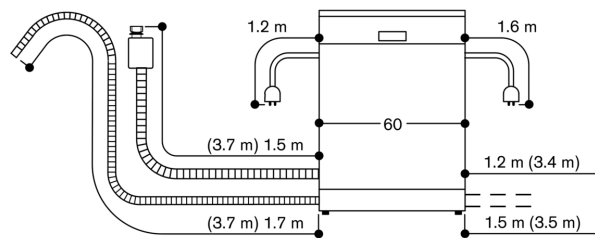

() values with extension kit

