

**Color Variants****RF411301****Fully integrated****Niche width 45.7 cm, Niche height 213.4 cm****Included accessories**

1 x ice cube scoop.

RF411301
Vario freezer 400 series
Fully integrated
Niche width 45.7 cm, Niche height 213.4 cm

Stainless steel interior
Generous lighting concept
Integrated ice maker with fixed inlet water connection
Solid aluminium door racks
Net volume 222 litres
Energy efficiency class A+

Handling

Electronic temperature control with digital display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Rest mode certified by Star-K.
Open-door and malfunction alarm.

Freezing

No-frost technology with fast freezing.
Temperature adjustable from -16 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 18 kg/24 h.
Storage time after a malfunction 10 h.
4 solid metal shelves, 3 of which are manually adjustable.
2 fully extendable drawers with transparent front, 1 of which large, 1 regular.
Bright interior lighting with light pillars.
4 height-adjustable door racks, 1 of which is extra deep.
1 door rack with transparent front flap.

Ice maker

Integrated, with fixed inlet water connection.
Can be switched off.
Ice cube production approx. 1.4 kg/24 h.
Removable ice storage container with approx. 4 kg capacity.

Consumption data

Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.
Energy consumption 319 kWh/year.
Noise level 41 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge left, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 56 kg.
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Connection

Total connected load 0.366 kW.
Connecting cable 3.0 m, detachable.
Water inlet.
Supply hose 3.0 m with 3/4" connection.
Water pressure 2 to 8 bar.

Characteristics**Product category****Upright freezer****Built-in / Free-standing****Built-in****Color / Material body****Frost free system****Fridge and freezer****Climate class****SN-T****Door panel options****Not possible****Width of the product (mm)****451****Depth of the product****608****Dimensions of the packed product****(HxWxD) (mm)****2270 x 740 x 550****Required niche size for installation****(HxWxD)****2134.0 x 457.0 x 610****Warning signal / malfunction****No signal****Defrost process****Cover door installation system****Fixed-mounted****Number of drawers/baskets (Stck)****2****Number of freezing flaps (Stck)****0****Lockable door****No****Thermometer freeze section****Digital****Light****Yes****Length electrical supply cord (cm)****300****Door hinge****Left reversible****Net weight (kg)****129.559****Gross weight (kg)****143.0****Multi-Flow Air Tower****Yes****Number of compressors****1****Number of independent cooling systems****1****Economy setting****Yes****Fast freezing switch****Yes****Number of Door Bins - Freezer****5****Door bin adjustability - Freezer****Yes****Tilt-out door bins in freezer****Yes****Number of shelves - Freezer****3****Door bin adjustability - Freezer****Yes****Shelf Material - Freezer****Reversible Door Hinge****Yes****Consumption and connection features****Connection Rating (W)****366****Current (A)****10****Frequency (Hz)****50****Approval certificates****CE, VDE****Energy consumption (kWh)****Total annual energy consumption (kWh)****Universal Product Code****825225956044****Main colour of product****Not applicable****Door panel options****Not possible****Installation typology****N/A****Noise level (dB)****41****GAGGENAU**

RF411301


Vario freezer 400 series

Fully integrated

Niche width 45.7 cm, Niche height 213.4 cm


2019-05-06

Page 2

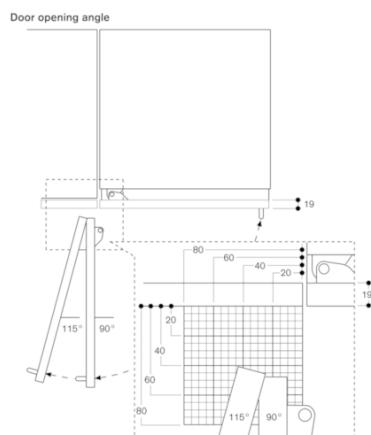



The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

Base detail

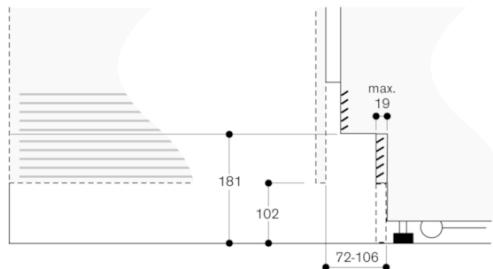

Based on the standard height of the appliance, the height of the plinth is 102 mm. Maximum thickness of the plinth is 19 mm.

●— 45.7 —●

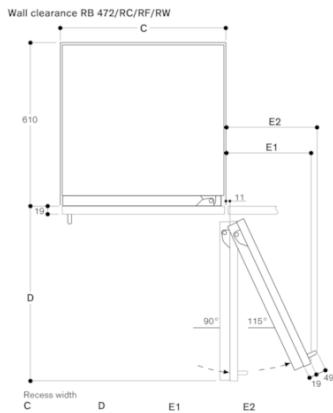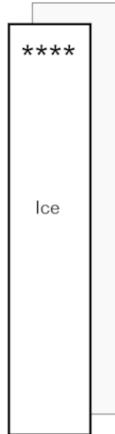

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

GAGGENAU