



VG232114F
Vario gas cooktop 200 series
Stainless steel control panel
Width 28 cm
Liquid gas 28 - 37 mbar

Can be combined with the cooktops of the Vario 200 series to a harmonic unity
Generous control panel for comfortable and secure operation
Solid smooth-surface cast pan supports for easy and safe positioning of cookware

Cooking zones

1 high output burner (560 – 2800 W), suitable for pots up to max. ø 22 cm.
1 standard output burner (380 – 1900 W), suitable for pots up to max. ø 22 cm.

Handling

One-handed operation.
Electric ignition.

Features

Cast pan support with continuous pot surface.
Enamelled burner cover.

Safety

Thermoelectric safety pilot.

Planning notes

Maximum drawer depth 42 cm.
Appliance can be snapped into the worktop from above.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
Special nozzles (order 1 of each): Part No. 433603 Natural gas 20 mbar Part No. 419831 Bottled gas 28-37 mbar Part No. 419830 Bottled gas 50 mbar
Appliance weight: approx. 8 kg.

Connection

Total connected load gas 4.7 kW.
Total connected load electric 1.0 W.
Connecting cable 1.4 m with plug.

Characteristics

Product name/family
Vario/Domino gas hob w control
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Gas
Total number of positions that can be used at the same time
2
Required niche size for installation (HxWxD)
55 x 268 x 490
Width of the product (mm)
288
Dimensions of the product (mm)
55 x 288 x 523
Dimensions of the packed product (HxWxD) (mm)
180 x 410 x 610
Net weight (kg)
8.108
Gross weight (kg)
9.2
Residual heat indicator
without
Location of control panel
Hob front
Basic surface material
brushed stainless steel
Color of surface
Stainless steel
Color of frame
Stainless steel
Approval certificates
CE, Eurasian, G-Mark, VDE
Length electrical supply cord (cm)
140



Consumption and connection features

Electrical connection rating (W)
1
Gas connection rating (W)
4700
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50; 60


2019-10-29

Page 1

VG232114F
Vario gas cooktop 200 series
Stainless steel control panel
Width 28 cm
Liquid gas 28 - 37 mbar
2019-10-29
Page 2

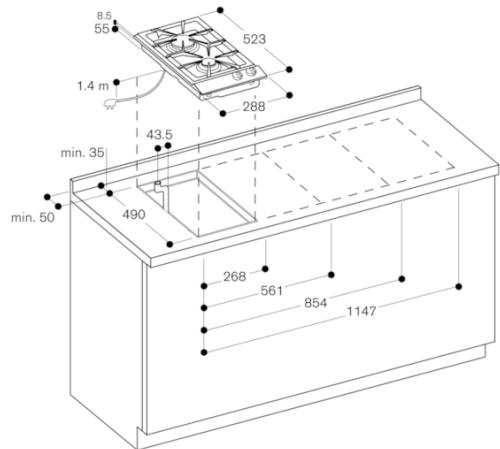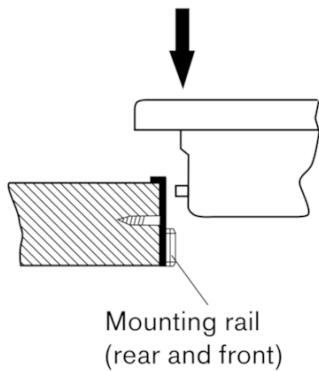

Gas connection

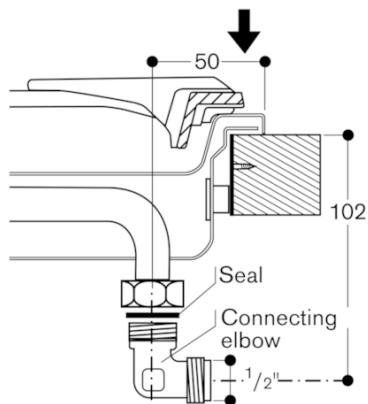

GAGGENAU