

**Color Variants****BMP250110****Included accessories**1 x combination grid.
1 x glass tub.

Flush installation
Single operation and combination of microwave, grill and oven
Sequential operation of up to 5 modes incl. programming of combined operation and rest time
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control
Interior volume 36 litres

Programs

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.
Oven operation with 4 heating methods:
Hot air 40 °C and from 100 °C to 250 °C,
Full surface grill + hot air from 100 °C to 250 °C,
Full surface grill + circulated air from 100 °C to 250 °C,
Full surface grill with 3 levels of intensity, maximum output 2000 W.
Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.
15 automatic programmes with weight indication, customisable:
4 defrosting programmes
4 cooking programmes
7 combination programmes
Option to save individual recipes.

Capacity

Rotary knob and TFT touch display operation.
Clear text display.
Information key with use indicators.
Side-opening door opens up to 110° angle.

Features

Innowave.
Rapid heating.
4 tray levels.
Actual temperature display.
60 W halogen light on the side.

Safety

Thermally insulated door with triple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass ceramic base.
Interior back wall with catalytic coating.


Performance

Door hinge not reversible.
Plan the niche without back wall.
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
The outer edge of the door handle extends 72 mm from the furniture cavity.
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
The mains socket needs to be planned outside of the built-in niche.



Connection

Total connected load 3.1 KW.
Connection cable 1.5 m without plug.

Characteristics**Type of micro-wave oven****MW-Combi****Color / Material Front****Built-in / Free-standing****Built-in****Door opening****Handle****Integrated Cleaning system****Catalytic partial****Control Panel Material****without panel****Door colour****Dimensions****455x590x559****Dimensions of the packed product****(HxWxD)****560x710x690****Required niche size for installation****(HxWxD)****450-450 x 560-560 x 550****Cavity dimensions****236 x 445 x 348****Cavity capacity****36****Maximum micro-wave power****1000****Number of interior lights****1****Net weight****35.6****Gross weight****41.1****EAN code****4242006218409****Connection Rating****3100****Fuse protection****16****Voltage****220-240****Frequency****60; 50****Length electrical supply cord****150****Consumption and connection features****2025-12-18****Page 1****GAGGENAU**

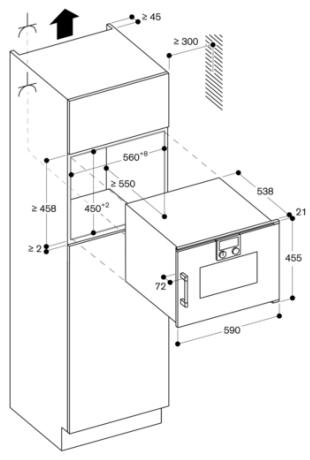

Socket
measurements in mm

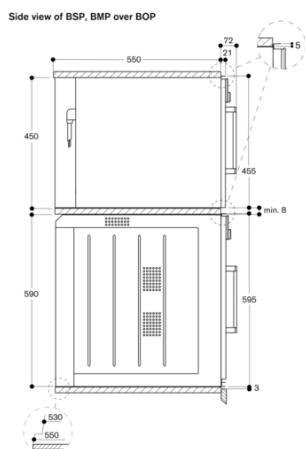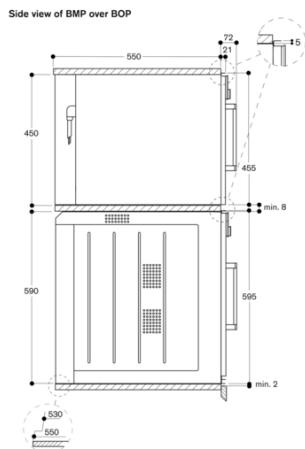

GAGGENAU