



Color Variants

BS471112

Included accessories

1 x outlet hose 3m.
1 x grid.
1 x pluggable meat probe.
1 x water inlet hose 3m.
1 x STS tray.
punched.
40 mm deep.

Optional accessories

BA010301

CLS10040

Handleless door / automatic door opening
Fixed inlet and outlet water connection
Cleaning system, fully automatic
Large cavity
2 LED light sources, perfect illumination on all levels
External steam generation
Steaming without pressure
Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
Sous-vide cooking with accurate temperature regulation
Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam
Automatic programmes
Core temperature probe with estimation of cooking time
Hot air fan rotates in both directions for ideal heat distribution
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 230 °C
Net volume 50 litres

Heating methods

Hot air + 100 % humidity.
Hot air + 80 % humidity.
Hot air + 60 % humidity.
Hot air + 30 % humidity.
Hot air + 0 % humidity.
Low temperature cooking.
Sous-vide cooking.
Full surface grill level 1 + humidity.
Full surface grill level 2 + humidity.
Full surface grill + circulated air.
Dough proofing.
Defrosting.
Regenerating.

Capacity

Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Option to save individual recipes (incl. core temperature probe).
Personalisation of automatic programmes.
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Full surface grill 2 kW behind glass ceramic.
Steam removal.
Misting function, injects additional steam into the cavity
Three-point core temperature probe with automatic shut-off and estimation of cooking time.
Automatic programmes.
Actual temperature display.
Automatic boiling point detection.
2 x LED light on the side.
Hygienic stainless steel cooking interior.
3 tray levels.
Home network integration for digital services (Home Connect) either via cable connection LAN or wireless via WiFi.

Characteristics

Color / Material Front

Built-in / Free-standing

Built-in

Door opening

Lateral

Integrated Cleaning system

No

Control Panel Material

without panel

Door Material

Stainless steel behind glass

Dimensions

455x590x540

Dimensions of the packed product

(HxWxD)

590x660x700

Required niche size for installation

(HxWxD)

450-450 x 560-560 x 550

Cavity dimensions

246 x 501 x 406

Usable volume (of cavity) - NEW

(2010/30/EC)

50

Number of interior lights

2

Net weight

47.7

Gross weight

50.0

EAN code

4242006277666

Connection Rating

3150

Fuse protection

16

Voltage

220-240

Frequency

50

Length electrical supply cord

175

Consumption and connection features

2025-12-18

Page 1

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Cleaning programme, fully automatic.
Descaling programme for the steam generator.
Drying program.
Automatic drying of the cavity at the end of the cooking process.
Strainer filter, removable.



Performance

Door hinge not reversible.
No other electrical appliances should be installed above the BS.
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").
Inlet hose can be extended once.
The outlet hose must not be longer than a maximum of 5 m.
The water connection for the inlet hose must always be accessible and not located directly behind the appliance.
The connection of the outlet hose to the siphon must not be directly behind the appliance and should be accessible.
The façade of the appliance extends 47 mm from the furniture cavity.
Consider the overhang when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 90° door opening angle.
The mains socket needs to be planned outside the built-in niche.


Connection

Total connected load 3.1 KW.
Only cold water connection.
Connecting cable 1.8 m with plug.
Plan a LAN cable.
Power consumption standby/display on 0.8 W.
Power consumption standby/display off 0.5 W.
Power consumption standby/network 1.8 W.
Time auto-standby/display on 20 min.
Time auto-standby/display off 20 min.
Time auto-standby/network 20 min.
Please check the user manual for how to switch off the WiFi module.

GAGGENAU

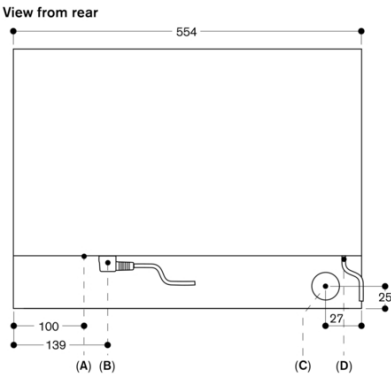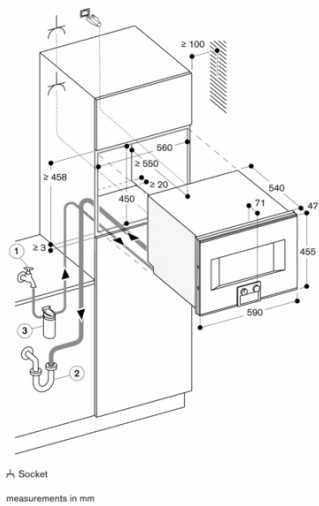

A: LAN connection
B: Electric terminal box
C: Water outlet
D: Cold water inlet
measurements in mm

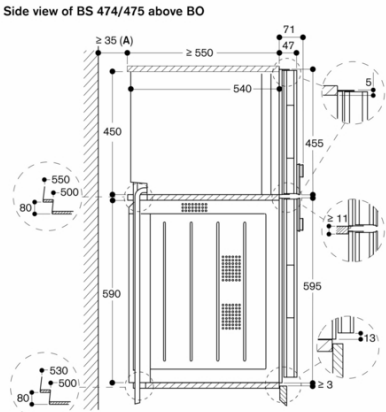

A: Only required if the water hoses for the BS steam oven cannot be accommodated in the corner recesses of the appliances.
measurements in mm