



**BSP271131**

**BA020390:**

Container non-stick perf

**BA046117:**

Glass tray, for 60cm oven

**CLS10040:**

Cleaning cartridge, 4 pcs.

**GN010330:**

GN-adapter

**GN114130:**

GN insert unperf, st. steel, GN1/3, 40mm

**GN114230:**

GN insert unperf, st. steel, GN2/3, 40mm

**GN124130:**

GN insert perf, st. steel, GN1/3, 40mm

**GN124230:**

GN insert perf, st. steel, GN2/3, 40mm

**GN340230:**

Gastronorm roaster GN 2/3

**BA010301:**

Telescopic racks for combi-steam oven

**BA020361:**

Container st. steel unperf

**BA020370:**

Container st. steel perf

**BA020381:**

Container non-stick unperf

**GF111100:**

Water descaling system

**GF121110:**

Filter cartridge for descaling system

**GZ010011:**

inlet and outlet hose extension

### Built-in compact oven with steam function 200 Series

60 x 45 cm, Door hinge: Left, Gaggenau Silver  
**BSP271131**

Flush installation

Fixed inlet and outlet water connection

Cleaning system, fully automatic

Large cavity

LED light source

External steam generation

Steaming without pressure

Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%

Sous-vide cooking with accurate temperature regulation

Automatic programmes

Core temperature probe with estimation of cooking time

Hot air fan rotates in both directions for ideal heat distribution

TFT touch display

Panel-free appliance with surface control module

Electronic temperature control from 30 °C to 230 °C

Net volume 50 litres

#### Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity. Hot air + 60 % humidity.

Hot air + 30 % humidity. Hot air + 0 % humidity.

Low temperature cooking. Sous-vide cooking.

Full surface grill level 1 + humidity. Full surface grill level 2 + humidity. Full surface grill + circulated air. Dough proofing. Defrosting. Regenerating.

#### Capacity

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to 110° angle.

#### Features

Steam removal.

Misting function, injects additional steam into the cavity

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Actual temperature display.

Automatic boiling point detection.

LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

Home network integration for digital services (Home Connect) either via cable connection LAN or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

#### Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

#### Cleaning

Cleaning programme, fully automatic.

Descaling programme for the steam generator.

Drying function.

Automatic drying of the cavity at the end of the cooking process.

Strainer filter, removable.

#### Performance

Door hinge not reversible.

No other electrical appliances should be installed above the BS.

At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").

Inlet hose can be extended once.

The outlet hose must not be longer than a maximum of 5 m.

The water connection for the inlet hose must always be accessible and not located directly behind the appliance.

The connection of the outlet hose to the siphon must not be directly behind the appliance and should be accessible.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

The outer edge of the door handle extends 72 mm from the furniture cavity.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle.

The mains socket needs to be planned outside the built-in niche.

#### Connection

Total connected load 3.1 KW.

Only cold water connection.

Connecting cable 1.8 m with plug.

Plan a LAN cable.

Power consumption standby/display on 0.8 W.

Power consumption standby/display off 0.5 W.

Power consumption standby/network 1.8 W.


Time auto-standby/display on 20 min.

Time auto-standby/display off 20 min.

Time auto-standby/network 20 min.


Please check the user manual for how to switch off the WiFi module.

View from rear

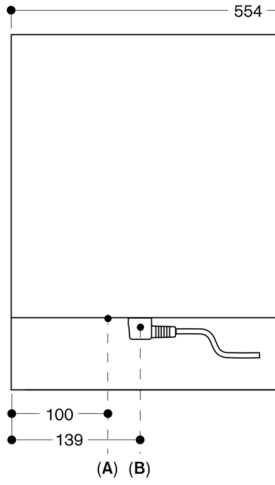

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet


measurements in mm

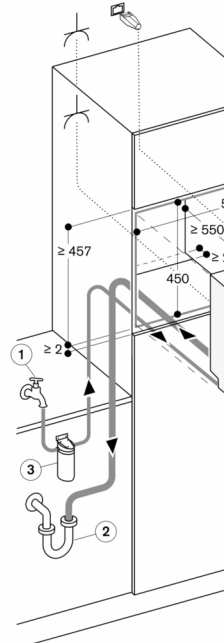


Socket

measurements in mm

Side view of BSP 260/270 above

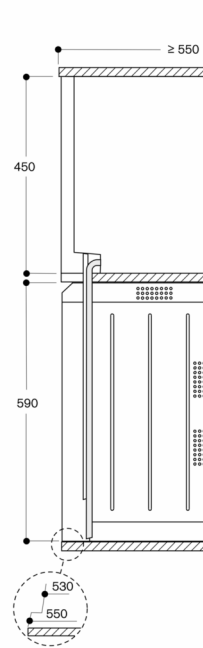

measurements in mm

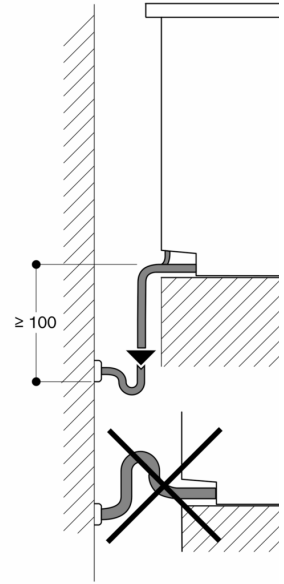

measurements in mm