

CA282811

Recirculation kit

CA282811

- For air recirculation.
- Can be combined with the flex induction cooktop with integrated ventilation system CV 282.
- For installation in the cabinet.
- Plinth height min. 10 cm.
- For optimum performance, the recirculated air requires sufficient space in the plinth to escape (outflow surface area at least 700 cm²).

- For air recirculation.

Can be combined with the flex induction cooktop with integrated ventilation system CV 282.

For installation in the cabinet.

Plinth height min. 10 cm.

For optimum performance, the recirculated air requires sufficient space in the plinth to escape (outflow surface area at least 700 cm²).

Odour reduction air recirculation 91%.

Extended change interval for the activated charcoal filter (approx. 1-1.5 years depending on cooking frequency).


Filters can be replaced from the front or rear.

Accessibility needs to be determined during installation already.

Allow accessibility to air recirculation module in the lower cabinet for replacing the filter.

Consists of 1 x 90° bend and 3 extensions for deeper worktops, 1 activated charcoal filter, flexible hose, 1 x 90° bend with diffuser for the plinth and 1 air recirculation module mount.

Front view CV 28. with air recirculation module CA 282 811

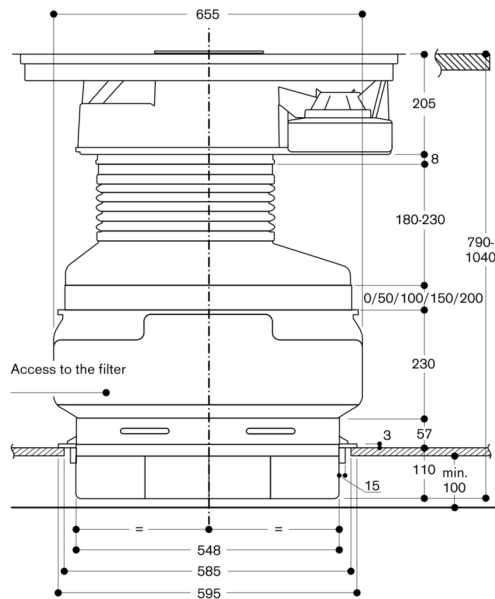

Side view CV 28. with air recirculation module CA 282 811

