



VG295220AU

1 x WOK attachment ring

WP400001:

Wok pan

**Gas hob 200 Series**  
**90 cm, Natural gas 10 mbar**  
**VG295220AU**

Control panel for comfortable and secure operation

Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size

Multi-ring burner of solid, heat-resistant brass as used in professional kitchen

Solid smooth-surface cast iron pan supports  
 Up to 17 kW on 5 burners

**Cooking zones**

1 multi-ring wok burner (300 W – 5000 W), suitable for pots up to max. ø 32 cm.

2 two-ring high output burners (170 W – 4000 W), suitable for pots up to max. ø 28 cm.

2 two-ring standard burners (170 W – 2000 W), suitable for pots up to max. ø 24 cm.

**Capacity**

Control knobs with illuminated ring.

Integrated control panel.

One-handed operation.

Electric ignition.

**Features**

Three-part cast iron pan support with flat, continuous pot surface.

Brass burner rings.

**Safety**

Thermoelectric safety pilot.

Residual heat indication.

Operation indicator.

**Performance**

No intermediate shelf required.

Appliance can be snapped into the worktop from above.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

Installation in a 90 cm wide lower cabinet is required.

A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.

Appliance weight: approx. 30. kg



**Connection**

Total connected load gas 17.0 KW.

Total connected load electric 10.0 W.

Connecting cable 1.7 m with plug.

## Gas connection

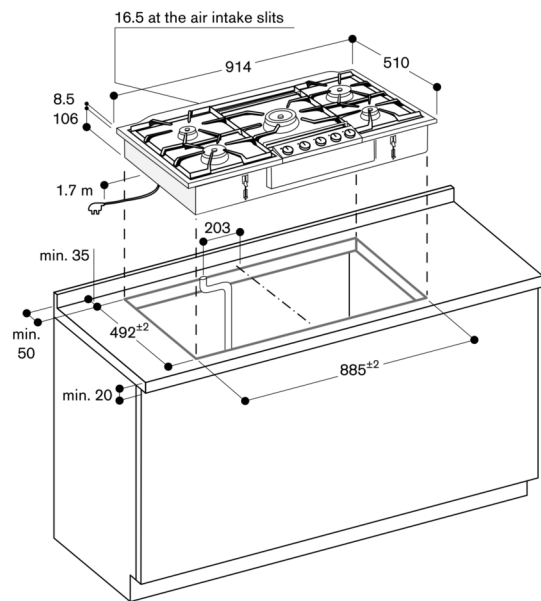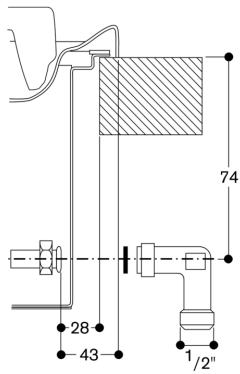

Minimum distance from the appliance cut-out to the side wall 300 mm.