

Color Variants

VI414110  
Stainless steel frame  
Width 38 cm

Optional accessories  
WP400001  
Wok pan made of multiple-layer material  
WZ400001  
Wok attachment for wok pan

Installation Accessories  
VA420000  
Connection strip for combination with other Vario appliances of the 400 series for flush mounting  
VA420001  
Connection strip for combination with other Vario appliances of the 400 series for flush mounting with appliance cover/filler strip  
VA420010  
Connection strip for combination with other Vario appliances of the 400 series for surface mounting  
VA420011  
Connection strip for combination with other Vario appliances of the 400 series for surface mounting with appliance cover/filler strip  
VA440010  
Stainless steel appliance cover with mounting strip  
VA450400  
Stainless steel filler strip 38 cm

VI414110  
Vario induction wok 400 series  
Stainless steel frame  
Width 38 cm

28 cm cooking zone with booster function  
Ideal for the original wok pan with round bottom, with wok ring  
Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel  
For surface mounting with a visible edge or for flush mounting  
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones  
1 induction wok zone ø 18 cm (1800 W, with booster 2500 W), which automatically expands to ø 28 cm (2800 W, with booster 3600 W).

Handling  
Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic control in 12 output levels.

Features  
Cooking zone marking.  
Booster function for each cooking zone.  
Pot detection with automatic activation of the outer cooking zone.  
Timer.

Safety  
Residual heat indication.  
Safety shut-off.


Planning notes  
Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.  
If installing with the appliance cover VA 440 or filler strip VA 450 take into account the additional space required for the depth.  
If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Characteristics  
Product name/family  
Vario/Domino cooking zone cera  
Built-in / Free-standing  
CONSTR\_TYPE.Built-in  
Energy input  
Electric  
Total number of positions that can be used at the same time  
1  
Required niche size for installation (HxWxD)  
54 x 360 x 490-500  
Width of the product (mm)  
380  
Dimensions of the product (mm)  
54 x 380 x 520  
Dimensions of the packed product (HxWxD) (mm)  
125 x 598 x 658  
Net weight (kg)  
6.839  
Gross weight (kg)  
8.0  
Residual heat indicator  
Separate  
Location of control panel  
External control  
Basic surface material  
Ceramic  
Color of surface  
Black, Stainless steel  
Color of frame  
Stainless steel  
Approval certificates  
AENOR, CE  
Length electrical supply cord (cm)  
150

Consumption and connection features  
Electrical connection rating (W)  
3600  
Gas connection rating (W)  
Current (A)  
16  
Voltage (V)  
220-240  
Frequency (Hz)  
50; 60  
2019-10-04  
Page 1



If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
Immersion depth 54 mm.  
Built-in control panel to be integrated in the bottom cabinet at drawer level.  
Panel thickness 16 - 26 mm.  
The drawing "Installation of the control knob" must be observed if the panel is more than 26 mm thick (there must be a recess at the rear).  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 7 kg.

Connection  
Total connected load 3.6 kW.  
Connecting cable 1.5 m without plug.

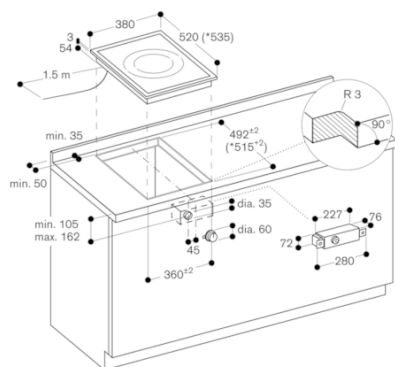


\* with appliance cover or filler strip  
See separate planning notes.

Installation with appliance cover/spacer batten;  
installation standing proud of surrounding surfaces

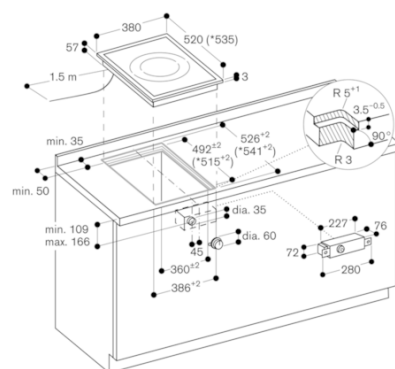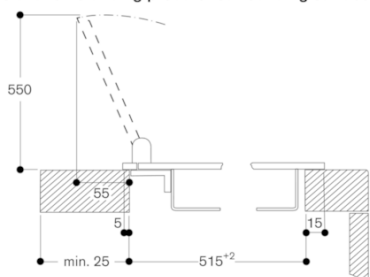


\* with appliance cover or filler strip  
See separate planning notes.

Installation with appliance cover/spacer batten;  
installation flush with surrounding surfaces

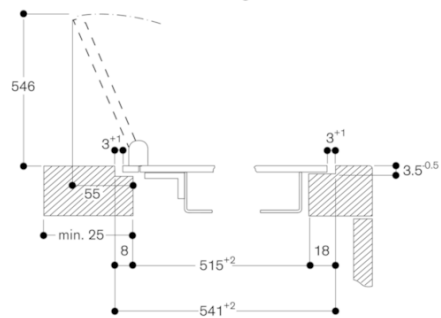


View from above




\* with appliance cover or filler strip  
(observe the front and rear asymmetrical support,  
see separate notes "Installation with appliance  
cover/filler strip").

Cross-section

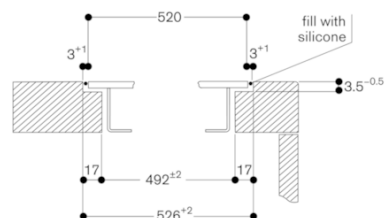


When installing with appliance cover or filler strip, pay attention  
to the deeper cut-out and the front and rear groove width.

Longitudinal section

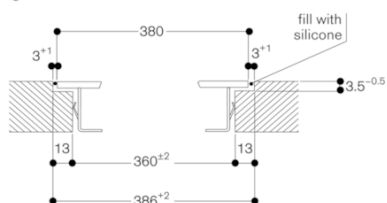

Installation of the control knob; surface mounting

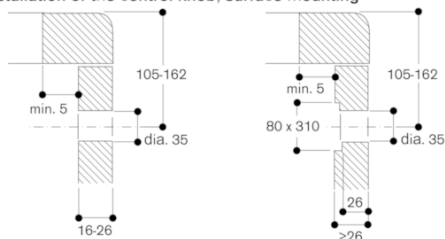

Installation of the control knob; flush installation

