



VG295114CA

WP400001:  
Wok pan

**Gas hob 200 series**  
**36", liquid gas 27.5 mbar**  
**VG295114CA**

Solid smooth-surface cast-iron pan support  
59, 700 BTU on five burners including wok  
burner

**Cooking zones**

5 brass gas burners

1 three-ring wok burner (300 W – 5000 W),  
suitable for pots up to max. ø 32 cm.

2 two-ring high output burners (160 W – 4000  
W), suitable for pots up to max. ø 28 cm.

2 two-ring standard burners (160 W - 2000 W),  
suitable for pots up to max. ø 24 cm.

**Operation**

Integrated control panel with cooking zone and  
output level markings.

One-handed operation.

**Features**

Three-part cast iron pan support with flat,  
continuous pot surface.

Brass burner rings.

**Safety**

Electronic flame monitoring with automatic  
re-ignition.

Automatic quick ignition.

**Planning notes**

Special nozzles can be ordered as spare parts.  
Plan for an electrical connection (the appliance  
is not operable without power supply).

Air intake from above.

No intermediate shelf required.

The rear panel must consist of a non-flammable  
material. Wall trims must be resistant to heat.

Installation in a 36" (90 cm) wide base cabinet is  
required.

An oven can be installed under the cooktop.

Appliance must be fixed from underneath.

Hardwire required.

A minimum lateral clearance of at least 12" from  
adjacent heat-sensitive furniture or contact  
surfaces must be observed or thermal insulation  
fitted.

Cooktop clamping range: 30 - 50 mm.

An air extraction hood must be switched on  
during operation of the gas cooktop.


Distance between ventilation hood and gas  
cooktop at least 760 mm.

**Rating**

Connecting cable 59" with ground plug.

Total rating: 59,700 BTU. Total Amps: 2 A.

Appliance weight: approx. 29 kg.

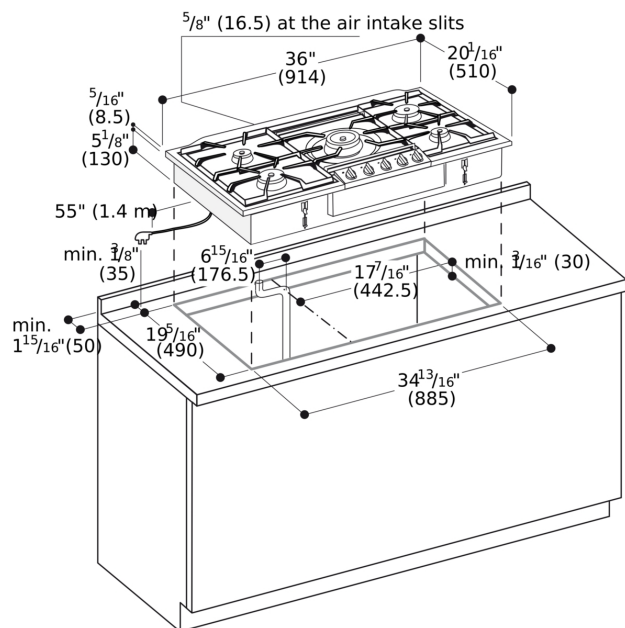

## Gas connection

