



Color Variants

AF200160
Stainless steel handle bar
Width 60 cm

AF200160
Flat kitchen hood 200 series
Stainless steel handle bar
Width 60 cm
Air extraction / Air recirculation

Unobtrusive flat kitchen hood design thanks to integrated glass panel in the steam screen
Especially quiet operation thanks to integrated sound insulation
A special mechanism extends the steam screen automatically
Steam screen and visible corpus made of brushed stainless steel
Integration of a spice rack is possible
Energy-saving, low-noise fan
Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
Dimmable, neutral white LED light for ideal illumination of the whole cooktop
The patented lowering frame allows the flat kitchen hood to disappear completely into the upper cabinet
Air extraction or air recirculation system
Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odour reduction as in air extraction mode and long replacement intervals
Energy efficiency class A

Output

Performance and noise level, output level 3/Intensive:
Air output according to EN 61591.
Sound power level according to EN 60704-3.
Sound pressure level according to EN 60704-2-13.
Odour reduction for air recirculation in accordance with EN 61591.
Air extraction:
380 / 690 m³/h.
54 / 66 dB (A) re 1 pW.
50 / 54 dB (A) re 20 µPa.
Air recirculation:
380 / 660 m³/h.
57 / 69 dB (A) re 1 pW.
43 / 55 dB (A) re 20 µPa.
Odour reduction air recirculation 94%.

Features

Controls at front.
3 electronically controlled power levels and 1 intensive mode.
Automatic function with sensor-controlled run-on function.
Grease filter saturation indicator.
Stainless steel grease filter, dishwasher-safe.
Neutral white LED light (3500 K), continuously dimmable.
Lamp output 2 x LED 3W.
Illuminance 683 lx.
Light can be switched on separately.
Fan technology with highly efficient, brushless DC motor (BLDC).
Integrated sound insulation for quiet operation.
The fan is activated when the steam screen is extended.
Patented technology for extension of the steam screen.
Extendable steam screen 198 mm.
Airflow-optimised interior for efficient air circulation and ease of cleaning.
Patented easy mounting system for simple installation.
The package includes an one-way flap.

Consumption data

Characteristics
Product name/family
Color chimney
Typology
Pull-out
Approval certificates
CE, Eurasian, Ukraine, VDE
Length electrical supply cord (cm)
175
Required niche size for installation (HxWxD)
388mm x 524mm x 290mm
Height of the chimney (mm)
Height of product, without chimney (mm)
Net weight (kg)
12.792
Type of control
Electronic
Number of speed settings
Maximum output air extraction (m3/h)
379
Boost position output recirculating (m3/h)
650
Maximum output recirculating air (m3/h)
374
Boost position air extraction (m³/h)
698
Number of lights
2
Noise level (dB(A) re 1 pW)
55
Diameter of air outlet (mm)
150 / 120
Grease filter material
Washable stainless steel
Odour filter
No
Operating Mode
Convertible
Delay Shut off modes
Required accessories
Optional accessories
AA210110, AA211812
Type of lamps used
LED
Total power of the lamps (W)
6
Grease filter type
Kassette
Clean filter reminders

Consumption and connection features
Connection Rating (W)
146
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
60; 50
Plug type
CH plug w/ earthing, Gardy plug w/ earthing, GB plug
Installation typology
Built-in
Universal Product Code
Material body
Stainless steel
Approval certificates
CE, Eurasian, Ukraine, VDE
Length of electrical supply cord (in)
Plug type
CH plug w/ earthing, Gardy plug w/ earthing, GB plug
Dimensions of the product, with chimney (if exists) (in)
/ x x
Dimensions of the packed product (in)
15.74 x 25.19 x 18.89
Height of the chimney (in)
Vertical rise height
Required distance above cooktop/ ranges
Net weight (lbs)
28
Gross weight (lbs)
32
Motor location


Energy efficiency class A at a range of energy efficiency classes from A++ to E.
Energy consumption 34 kwh/year.
Ventilation efficiency class A.
Illumination efficiency class A.
Grease filter efficiency class B.
Sound level min. 41 dB / max. 54 dB normal mode.

Planning notes


Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the activated charcoal filter.
The door of the upper cabinet must be fully open in order to change the activated charcoal filter.
To be installed in an upper cabinet without base.
The required cavity depth of the upper cabinet together with the lowering frame measures 335 mm.
The required cavity height of the upper cabinet together with the lowering frame measures 600 mm.
Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).
Clearance above electric appliances min. 43 cm.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 146 W.
Connecting cable 1.8 m, pluggable.

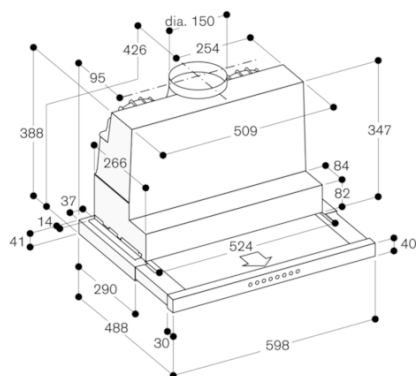


View of upper cabinet from above with AA 211 812

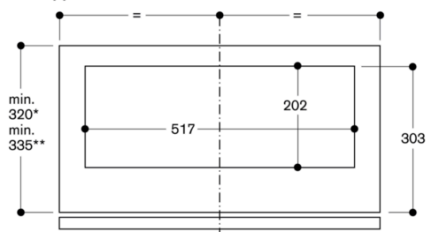


* Appliance only
** Appliance with AA 210 490/460 lowering frame


Cross-section of upper cabinet with AA 211 812 and lowering frame AA 210 490/460

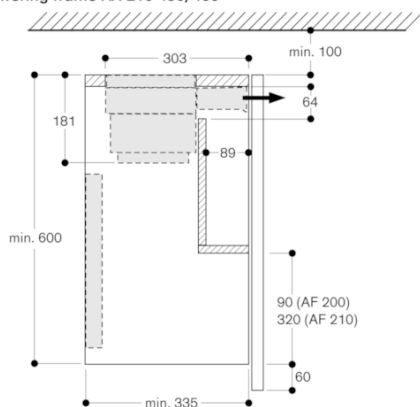

Cross-section of upper cabinet with AA 211 812

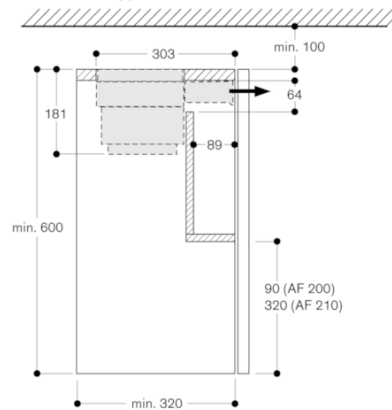

Upper cabinet for AF 200 160

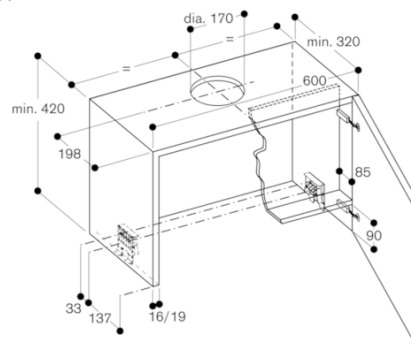

Upper cabinet for AF 200 160 with AA 210 460 lowering frame

