



Color Variants

AF210161  
Stainless steel handle bar  
Width 60 cm

AF210161  
Flat kitchen hood 200 series  
Stainless steel handle bar  
Width 60 cm  
Air extraction / Air recirculation

Unobtrusive flat kitchen hood design thanks to integrated glass panel in the steam screen  
Especially quiet operation thanks to integrated sound insulation  
Steam screen extends by touching the handle bar  
Especially high air output  
Energy-saving, low-noise fan  
Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours  
Dimmable, neutral white LED light for ideal illumination of the whole cooktop  
The patented lowering frame allows the flat kitchen hood to disappear completely into the upper cabinet  
Air extraction or air recirculation system  
Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odour reduction as in air extraction mode and long replacement intervals  
Energy efficiency class A+

**Output**  
Performance and noise level, output level 3/Intensive:  
Air output according to EN 61591.  
Sound power level according to EN 60704-3.  
Sound pressure level according to EN 60704-2-13.  
Odour reduction for air recirculation in accordance with EN 61591.  
Air extraction:  
510 / 920 m³/h.  
56 / 70 dB (A) re 1 pW.  
42 / 56 dB (A) re 20 µPa.  
Air recirculation:  
500 / 900 m³/h.  
62 / 69 dB (A) re 1 pW.  
48 / 55 dB (A) re 20 µPa.  
Odour reduction air recirculation 91%.

**Features**  
Controls at front.  
3 electronically controlled power levels and 1 intensive mode.  
Automatic function with sensor-controlled run-on function.  
Grease filter saturation indicator.  
Stainless steel grease filter, dishwasher-safe.  
Neutral white LED light (3500 K), continuously dimmable.  
Lamp output 2 x LED 3W.  
Illuminance 683 lx.  
Light can be switched on separately.  
Fan technology with highly efficient, brushless DC motor (BLDC).  
Integrated sound insulation for quiet operation.  
The fan is activated when the steam screen is extended.  
Patented technology for extension of the steam screen.  
Extendable steam screen 198 mm.  
Airflow-optimised interior for efficient air circulation and ease of cleaning.  
Patented easy mounting system for simple installation.  
The package includes an one-way flap.

**Consumption data**  
Energy efficiency class A+ at a range of energy efficiency classes from A++ to E.

**Characteristics**  
**Product name/family**  
**Color chimney**  
**Typology**  
Pull-out  
**Approval certificates**  
Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE  
**Length electrical supply cord (cm)**  
175  
**Required niche size for installation (HxWxD)**  
349mm x 524mm x 290mm  
**Height of the chimney (mm)**  
**Height of product, without chimney (mm)**  
**Net weight (kg)**  
14.018  
**Type of control**  
Electronic  
**Number of speed settings**  
**Maximum output air extraction (m3/h)**  
514  
**Boost position output recirculating (m3/h)**  
884  
**Maximum output recirculating air (m3/h)**  
496  
**Boost position air extraction (m³/h)**  
953  
**Number of lights**  
2  
**Noise level (dB(A) re 1 pW)**  
57  
**Diameter of air outlet (mm)**  
120 / 150  
**Grease filter material**  
Washable stainless steel  
**Odour filter**  
No  
**Operating Mode**  
Convertible  
**Delay Shut off modes**  
**Required accessories**  
**Optional accessories**  
AA210110, AA211812  
**Type of lamps used**  
LED  
**Total power of the lamps (W)**  
6  
**Grease filter type**  
Kassette  
**Clean filter reminders**


**Consumption and connection features**  
**Connection Rating (W)**  
266  
**Current (A)**  
10  
**Voltage (V)**  
220-240  
**Frequency (Hz)**  
50; 60  
**Plug type**  
CH plug w/ earthing, Gardy plug w/ earthing, GB plug  
**Installation typology**  
Built-in  
**Universal Product Code**  
**Material body**  
Stainless steel  
**Approval certificates**  
Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE  
**Length of electrical supply cord (in)**  
**Plug type**  
CH plug w/ earthing, Gardy plug w/ earthing, GB plug  
**Dimensions of the product, with chimney (if exists) (in)**  
/ x x  
**Dimensions of the packed product (in)**  
15.74 x 25.19 x 18.89  
**Height of the chimney (in)**  
**Vertical rise height**  
**Required distance above cooktop/ranges**  
**Net weight (lbs)**  
31  
**Gross weight (lbs)**

Energy consumption 39.4 kwh/year.  
Ventilation efficiency class A.  
Illumination efficiency class A.  
Grease filter efficiency class B.  
Sound level min. 40 dB / max. 56 dB normal mode.

**Planning notes**  
Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the activated charcoal filter.  
The door of the upper cabinet must be fully open in order to change the activated charcoal filter.  
To be installed in an upper cabinet without base.  
The required cavity depth of the upper cabinet together with the lowering frame measures 335 mm.  
The required cavity height of the upper cabinet together with the lowering frame measures 600 mm.  
Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).  
Clearance above electric appliances min. 43 cm.  
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


**Connection**  
Total connected load 266 W.  
Connecting cable 1.8 m, pluggable.

View of upper cabinet from above with AA 211 812

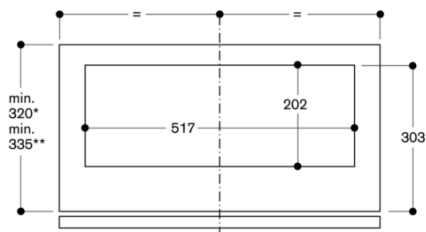




\* Appliance only  
\*\* Appliance with AA 210 490/460 lowering frame

Upper cabinet for AF 210

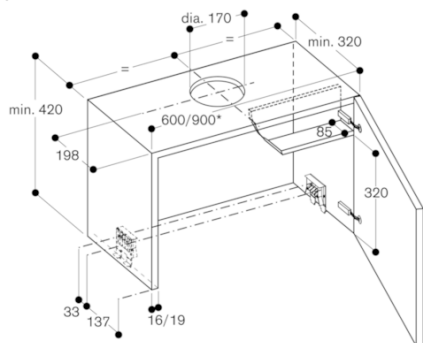


\* for upper cabinets measuring 90 cm, the AA 210 491 installation set is required in addition

Upper cabinet for AF 210  
with AA 210 460/AA 210 490 lowering frame

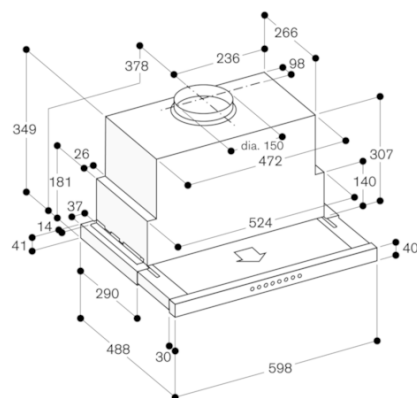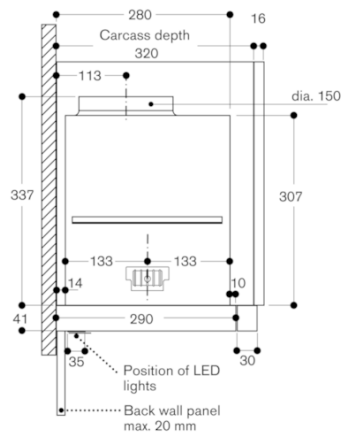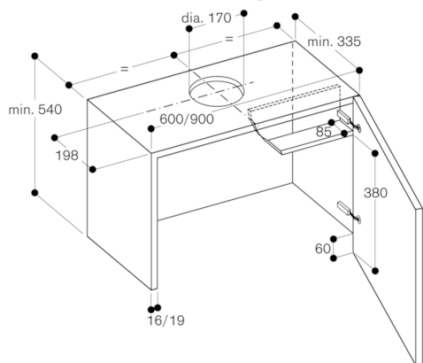

Cross-section of upper cabinet with AA 211 812 and  
AA 210 490/460 lowering frame

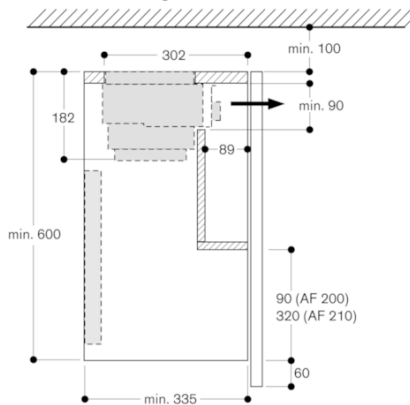

Cross-section of upper cabinet with AA 211 812

