



BO471101
Oven 400 series
Full glass door in Gaggenau Anthracite
Width 60 cm
Controls at the top

Handleless door / automatic door opening
Pyrolytic system
17 heating methods, with core temperature probe, rotisserie spit and baking stone function
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 300 °C
Net volume 76 litres

Heating methods

Hot air. Eco hot air. Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat. Bottom heat. Hot air + bottom heat. Hot air + 1/3 bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proofing. Defrosting. Keeping warm.

Handling

Automatic door opening. Rotary knob and TFT touch display operation. Clear text display. Option to save individual recipes (incl. core temperature probe). Information key with use indicators. Side-opening door opens up to 180° angle.

Features

Core temperature probe with automatic shut-off. Rotisserie spit. Baking stone socket. Actual temperature display. Rapid heating. Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer. 60 W halogen light on the top. 2 x 10 W halogen light on the side. Enamelled side shelf supports with 4 tray levels, pyrolysis-safe.

Safety

Thermally insulated door with quadruple glazing. Child lock. Safety shut-off. Cooled housing with temperature protection.

Cleaning

Pyrolytic system. Gaggenau enamel. Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible. The door panel surface of the appliance extends 47 mm from the furniture cavity. If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity. Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance. When planning a corner solution, pay attention to the 90° door opening angle. To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.

Characteristics

Color / Material Front
Built-in / Free-standing
Built-in
Integrated Cleaning system
 Pyrolytic
Required niche size for installation (HxWxD)
 590-590 x 560-560 x 550
Dimensions of the product (mm)
 595 x 590 x 547
Dimensions of the packed product (HxWxD) (mm)
 780 x 760 x 680
Control Panel Material
Door Material
 Glass
Net weight (kg)
 60.659
Usable volume of cavity (l)
 76
Cooking method
 Baking stone function, Bottom heat, Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, Roaster function, Top heat, warming
First cavity material
Number of interior lights
 3
Approval certificates
 Australia Standards, CE, Eurasian, Ukraine, VDE
Length electrical supply cord (cm)
Interior Lights - cavity 1
 3
Pull-out system
 Accessory
Clock function
 Alarm, Off, On, timer
Included accessories
 2 x enamel baking tray, suit. pyrolytic clean, 1 x rotary spit, 1 x glass pan, 1 x grill shelf, 1 x grill tub with grid, 1 x pluggable meat probe
Bake Element Wattages cavity 1 (W)
Broil Element Wattages cavity 1 (W)
 3000
Convection Element Wattages cavity 1 (W)
 2100
Microwave wattage cavity 1 (W)
Drawer wattage (W)

Consumption and connection features
Energy efficiency class (2010/30/EC)
 A
Energy consumption per cycle conventional (2010/30/EC)
 1.25
Energy consumption gas oven per cycle conventional (2010/30/EC)
Energy consumption per cycle forced air convection (2010/30/EC)
 0.83
Energy consumption gas oven per cycle forced air convection (2010/30/EC)
Energy efficiency index (2010/30/EC)
 95.4
Connection Rating (W)
 3700
Current (A)
 16
Voltage (V)
 220-240
Frequency (Hz)
 50
Plug type
 no plug
Connecting cable type
Universal Product Code
Color / Material Front
Alternative colors available
 BO471111
Energy input
 Electric
Approval certificates
 Australia Standards, CE, Eurasian, Ukraine, VDE
Length of electrical supply cord (in)
Required cutout/niche size for

The mains socket needs to be planned outside of the built-in niche.

Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D. Total connected load 3.7 KW. Plan a connection cable.

Color Variants

BO471101
Full glass door in Gaggenau Anthracite
Width 60 cm

Included accessories

2 x enamel baking tray. suit. pyrolytic clean. 1 x rotary spit. 1 x glass pan. 1 x grill shelf. 1 x grill tub with grid. 1 x pluggable meat probe.

Optional accessories



BA056133
Baking stone
BS020002
Pizza paddle, set of 2

Product Variants


BO470101
Oven 400 series
Full glass door in Gaggenau Anthracite
Width 60 cm
Controls at the top

GAGGENAU

BO471101
Oven 400 series
Full glass door in Gaggenau Anthracite
Width 60 cm
Controls at the top
2020-08-01
Page 2

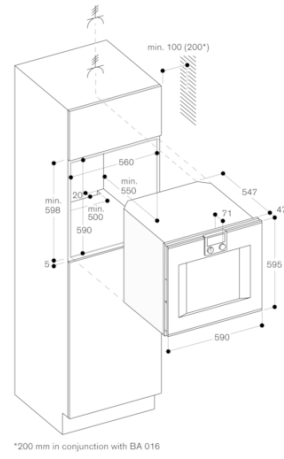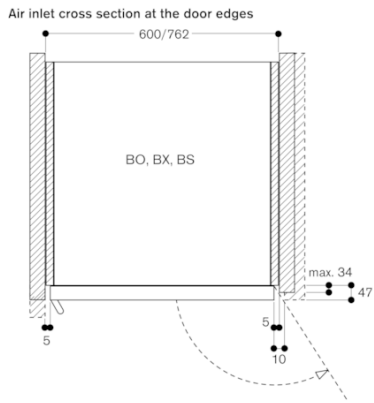

When installed next to each other

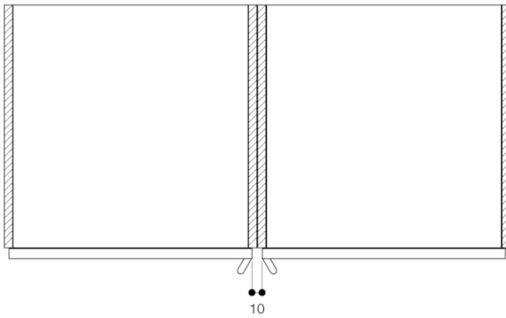

Cross section of the top/bottom door edge gaps

