



BOP241111
Oven 200 series
Full glass door in Gaggenau Metallic
Width 60 cm

Flush installation
13 heating methods, with core temperature probe and baking stone function
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 300 °C
Net volume 76 litres

Heating methods
 Hot air. Eco hot air. Top + bottom heat. Top heat. Bottom heat. Hot air + bottom heat. Full surface grill + circulated air. Full surface grill. Compact grill. Baking stone function. Roaster function. Dough proofing. Defrosting.

Handling
 Rotary knob and TFT touch display operation.
 Clear text display.
 Option to save individual recipes (incl. core temperature probe).
 Information key with use indicators.
 Side-opening door opens up to 110° angle.

Features
 Core temperature probe with automatic shut-off.
 Baking stone socket.
 Actual temperature display.
 Rapid heating.
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
 60 W halogen light on the top.
 Chromium-plated side shelf supports with 4 tray levels.

Safety
 Thermally insulated door with triple glazing.
 Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning
 Back wall and ceiling with catalytic coating.
 Gaggenau enamel.
 Heated catalyser to clean the oven air.
 Grease filter in front of hot air fan.

Planning notes
 Door hinge not reversible.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 The outer edge of the door handle extends 72 mm from the furniture cavity.
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
 When planning a corner solution, pay attention to the 110° door opening angle.
 For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.
 To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

Characteristics
Color / Material Front
Built-in / Free-standing
 Built-in
Integrated Cleaning system
 No
Required niche size for installation (HxWxD)
 590-590 x 560-560 x 550
Dimensions of the product (mm)
 595 x 590 x 547
Dimensions of the packed product (HxWxD) (mm)
 780 x 760 x 680
Control Panel Material
Door Material
 Glass
Net weight (kg)
 51.904
Usable volume of cavity (l)
 76
Cooking method
 Baking stone function, Bottom heat, Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, Roaster function, Top heat
First cavity material
Number of interior lights
 1
Approval certificates
 CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
Interior Lights - cavity 1
 1
Pull-out system
 Accessory
Clock function
 Alarm, Off, On, timer
Included accessories
 1 x enamel baking tray, suit. pyrolytic clean, 1 x glass pan, 1 x grill shelf, 1 x pluggable meat probe
Bake Element Wattages cavity 1 (W)
Broil Element Wattages cavity 1 (W)
 3000
Convection Element Wattages cavity 1 (W)
 2100
Microwave wattage cavity 1 (W)
Drawer wattage (W)

Consumption and connection features
Energy efficiency class (2010/30/EC)
 A
Energy consumption per cycle conventional (2010/30/EC)
 1.25
Energy consumption gas oven per cycle conventional (2010/30/EC)
Energy consumption per cycle forced air convection (2010/30/EC)
 0.83
Energy consumption gas oven per cycle forced air convection (2010/30/EC)
Energy efficiency index (2010/30/EC)
 95.4
Connection Rating (W)
 3700
Current (A)
 16
Voltage (V)
 220-240
Frequency (Hz)
 60; 50
Plug type
 fixed connection, no plug
Connecting cable type
Universal Product Code
 825225914679
Color / Material Front
Alternative colors available
 BOP241101, BOP241131
Energy input
 Electric
Approval certificates
 CE, Eurasian, G-Mark, Ukraine, VDE
Length of electrical supply cord (in)
Required cutout/niche size for installation (in)
 x x
Dimensions of the packed product (in)

The mains socket needs to be planned outside of the built-in niche.

Connection
 Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
 Total connected load 3.7 KW.
 Plan a connection cable.

Color Variants
BOP241111
Full glass door in Gaggenau Metallic
Width 60 cm
BOP241101
Full glass door in Gaggenau Anthracite
Width 60 cm
BOP241131
Full glass door in Gaggenau Silver
Width 60 cm

Included accessories
 1 x enamel baking tray.
 suit. pyrolytic clean.
 1 x glass pan.
 1 x grill shelf.
 1 x pluggable meat probe.

Optional accessories
BA056133
Baking stone
BS020002
Pizza paddle, set of 2

Product Variants
BOP240111
Oven 200 series
Full glass door in Gaggenau Metallic
Width 60 cm

BOP241111


Oven 200 series

Full glass door in Gaggenau Metallic

Width 60 cm

2020-07-13

Page 2

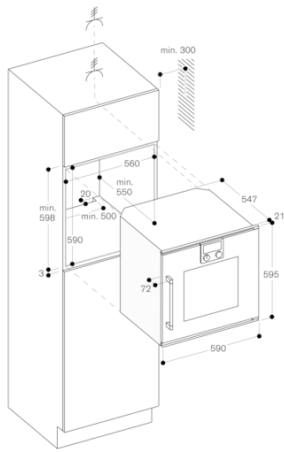

GAGGENAU