



BS470102



1 x outlet hose 3m
1 x grid
1 x pluggable meat probe
1 x water inlet hose 3m
punched
1 x STS tray
unpunched
40 mm deep
1 x cleaning cartridge

BA010301:

Telescopic racks for combi-steam oven

BA020361:

Container st. steel unperf

BA020370:

Container st. steel perf

BA020381:

Container non-stick unperf

BA020390:

Container non-stick perf

BA046117:

Glass tray, for 60cm oven

CLS10040:

Cleaning cartridge, 4 pcs.

GF111100:

Water descaling system

GF121110:

Filter cartridge for descaling system

GN010330:

GN-adapter

GN114130:

GN insert unperf, st. steel, GN1/3, 40mm

GN114230:

GN insert unperf, st. steel, GN2/3, 40mm

GN124130:

GN insert perf, st. steel, GN1/3, 40mm

GN124230:

GN insert perf, st. steel, GN2/3, 40mm

GN340230:

Gastronorm roaster GN 2/3

GZ010011:

inlet and outlet hose extention

combi-steam oven 400 series

60 x 45 cm, door hinge: right, Gaggenau

Anthracite

BS470102

– Combination of hot air and steam

– Fixed inlet and outlet water connection

– Handleless door / automatic door opening

Fixed inlet and outlet water connection

Cleaning system, fully automatic

Large cavity

2 LED light sources

External steam generation

Steaming without pressure

Hot air 30 °C to 230 °C, freely combinable
humidity levels of 0%, 30%, 60%, 80% or 100%.

Sous-vide cooking with accurate temperature
regulation

Full surface grill behind glass ceramic,
combinable with circulated air up to 230 °C and
steam

Automatic programmes

Core temperature probe with estimation of
cooking time

Hot air fan rotates in both directions for ideal
heat distribution

TFT touch display

Panel-free appliance with surface control
module

Electronic temperature control from 30 °C to
230 °C

Net volume 50 litres

Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity.

Hot air + 60 % humidity.

Hot air + 30 % humidity.

Hot air + 0 % humidity.

Low temperature cooking.

Sous-vide cooking.

Full surface grill level 1 + humidity.

Full surface grill level 2 + humidity.

Full surface grill + circulated air.

Dough proofing.

Defrosting.

Regenerating.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core
temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to 180° angle.

Features

Full surface grill 2 kW behind glass ceramic.

Steam removal.

Misting.

Three-point core temperature probe with
automatic shut-off and estimation of cooking
time.

Automatic programmes.

Actual temperature display.

Automatic boiling point detection.

Capacity display for filter cartridge (if connected
to GF 111 100 descaling system).

2 x LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

Home network integration for digital services
(Home Connect) either via cable connection
LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality
depends on the Home Connect services, which
are not available in every country. For further
information please check: home-connect.com.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Cleaning programme, fully automatic.

Descaling programme for the steam generator.

Drying programme.

Automatic drying of the cavity at the end of the
cooking process.

Strainer filter, removable.

Demo cleaning programme.

Planning notes

Door hinge not reversible.

No other electrical appliances should be
installed above the BS.

At no point may the outlet hose be positioned
higher than the bottom edge of the appliance.
The outlet hose must also be at least 100 mm
lower than the appliance outlet (see drawing
"drainage connection").

Inlet hose can be extended once.

The outlet hose must not be longer than a
maximum of 5 m.

The water connection for the inlet hose must
always be accessible and not located directly
behind the appliance.

The connection of the outlet hose to the siphon
must not be directly behind the appliance and
should be accessible.

The descaling system GF 111 100 (3) must be
installed when connecting the appliance if the
water hardness exceeds 7° dH.

The façade of the appliance extends 47 mm
from the furniture cavity.

Consider the overhang when planning to open
drawers next to the appliance.

When planning a corner solution, pay attention
to the 90° door opening angle.

The mains socket needs to be planned outside
the built-in niche.

Connection

Energy efficiency class A at a range of energy
efficiency classes from A+++ to D.

Total connected load 3.1 KW.

Only cold water connection.

Connecting cable 1.8 m with plug.

Plan a LAN cable.

Power consumption standby/display on 0.8 W.

Power consumption standby/display off 0.5 W.


Power consumption standby/network 1.8 W.

Time auto-standby/display on 20 min.


Time auto-standby/display off 20 min.

Time auto-standby/network 20 min.

Please check the user manual for how to switch
off the WiFi module.

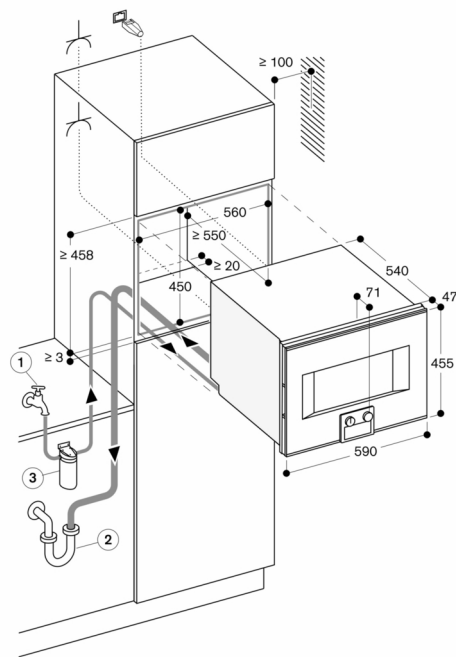

Socket
measurements in mm

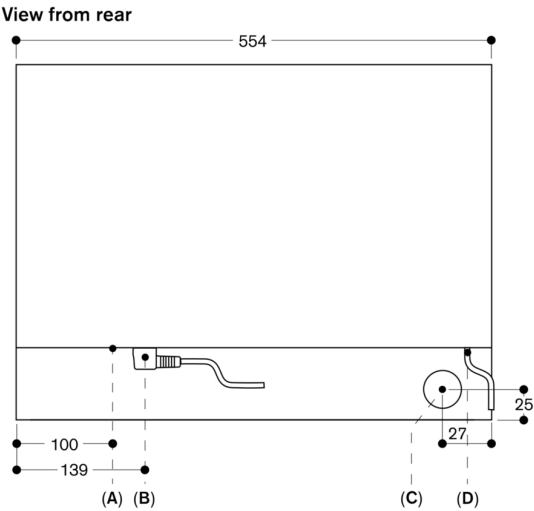

A: LAN connection
B: Electric terminal box
C: Water outlet
D: Cold water inlet

measurements in mm