



BSP251110
Combi-steam oven 200 series
Full glass door in Gaggenau Metallic
Width 60 cm
Controls at the top



Flush installation
Water tank
Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
TFT touch display
Panel-free appliance with surface control module
Steaming without pressure
Electronic temperature control from 30 °C to 230 °C
Core temperature probe, removable

Heating methods

Hot air + 100 % humidity.
Hot air + 80 % humidity.
Hot air + 60 % humidity.
Hot air + 30 % humidity.
Hot air + 0 % humidity.
Dough proofing.
Defrosting.
Regenerating.
Low temperature cooking.

Handling

Rotary knob and TFT touch display operation.
Option to save individual recipes (incl. core temperature probe).
Information key with use indicators.
Side-opening door opens up to 110° angle.

Features

Removable 1.3 litre water tank.
Water level warning.
Core temperature probe with automatic shut-off.
Actual temperature display.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
Electronic boiling point detection.
48 W halogen light on the side.
Hygienic stainless steel cooking interior.
4 tray levels.

Safety

Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Cleaning aid.
Drying programme.
Descaling programme.
Grease filter, dishwasher-safe.

Planning notes

Door hinge not reversible.
No other electrical appliances should be installed above the BS.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
The outer edge of the door handle extends 72 mm from the furniture cavity.
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 110° door opening angle.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.
The mains socket needs to be planned outside of the built-in niche.

Characteristics

Color / Material Front
Built-in / Free-standing
Built-in

Door opening

Lateral

Required niche size for installation (HxWxD)

Dimensions

Dimensions of the packed product (HxWxD) (mm)
575 x 660 x 690

Control Panel Material

Door Material

Glass

Net weight (kg)

35.983

Approval certificates

, CE, Eurasian, G-Mark, Ukraine, VDE

Length electrical supply cord (cm)

150

Cooking method

Defrost, fermentation, Hot Air, Hot air + steam 100%, Hot air + steam 30%, Hot air + steam 60%, Hot air + steam 80%, low temperature steam, Regeneration

Time-setting Options

Electrical connection rating (W)

Current (A)

8

Voltage (V)

220-240

Frequency (Hz)

50; 60

Plug type

fixed connection, no plug

Connecting cable type

Approval certificates

, CE, Eurasian, G-Mark, Ukraine, VDE

Universal Product Code

825225802976

Color / Material Front

Alternative colors available

BSP251100, BSP251130

Energy input

Electric

Current (A)

8

Voltage (V)

220-240

Frequency (Hz)

50; 60

Approval certificates

, CE, Eurasian, G-Mark, Ukraine, VDE

Length of electrical supply cord (in)

Plug type

fixed connection, no plug

Appliance Dimensions (h x w x d) (in)

Required cutout/niche size for installation (in)

Dimensions of the packed product (in)

Net weight (lbs)

79.000

Gross weight (lbs)

84.000

Consumption and connection features

2021-07-09

Page 1

Connection

Total connected load 1.9 KW.
Connection cable 1.5 m without plug.

Color Variants

BSP251110
Full glass door in Gaggenau Metallic
Width 60 cm


Included accessories

1 x STS tray-GN2/3-punched-40 mm deep.
1 x STS tray-GN2/3-unpunched-40 mm deep.
1 x grid.
1 x pluggable meat probe.

Optional accessories

GN114130
Gastronorm insert, stainless steel, GN 1/3
GN114230
Gastronorm insert, stainless steel, GN 2/3

BSP251110
Combi-steam oven 200 series
Full glass door in Gaggenau Metallic
Width 60 cm
Controls at the top
2021-07-09
Page 2

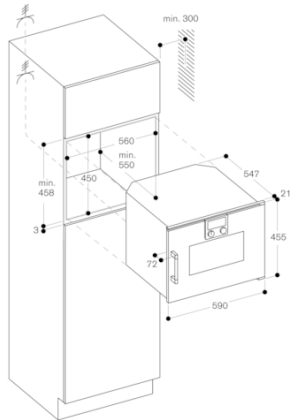

Side view of BSP, BMP over BOP

