



Color Variants

RB472304

With fresh cooling close to 0 °C

Fully integrated

Included accessories

1 x egg box with lid.

1 x ice cube scoop.

Optional accessories

RA450010

Activated charcoal filter for water filter system including saturation indicator

Installation Accessories

RA425110

Handle bar, stainless steel, long

RA460000

Accessory for side-by-side installation

RA460030

Connecting element for vertically split fronts (for fridge-freezer combination with one door)

RB472304

Vario fridge-freezer combination 400 series

With fresh cooling close to 0 °C

Fully integrated

Niche width 76.2 cm, Niche height 213.4 cm

Cooling section with one door and one fully extendable freezing drawer

Stainless steel interior with solid anthracite aluminium elements
Warm white and glare-free LED light spots

Opening assist for door with two options:

1. Push-to-open function for integration into handleless furniture front

2. Pull-to-open function to facilitate opening the door using a handle

Flat stainless steel inner door, full-length

Almost invisible rail system for shelves and door racks for flexible positioning

Solid anthracite aluminium door racks

1 fresh cooling drawer close to 0 °C with manually adjustable temperature

and one fresh cooling drawer with manually adjustable humidity

Integrated ice maker with fixed inlet water connection

Fully extendable freezer drawer with practical divider in anthracite

TFT touch display

Net volume 418 litres

Handling

TFT touch display operation.

Clear text display.

Technical Features

Dynamic cold air distribution.

Automatic defrosting with defrost water evaporation.

Activated charcoal air filter.

Rest mode certified by Star-K.

When rest mode is active, the appliance can only be opened using a handle.

Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Cooling

No-Frost technology with fast cooling.

Temperature adjustable from +2 °C to +8 °C.

3 safety glass shelves, white glass, 2 of which are individually adjustable in height.

4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.

Flat door rail system with fully flexible positioning of door racks.

3 height adjustable door racks, 1 of which is extra deep.

Net volume 281 litres.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C with transparent front, illuminated.

Temperature can be adjusted manually.

Ideal for meat, fish and poultry.

Net volume 27 litres.

Fresh cooling

1 fully extendable fresh cooling drawer with transparent front, illuminated.

Humidity can be adjusted manually.

Ideal for fruit and vegetables.

Freezing

No-frost technology with fast freezing at -30 °C.

Characteristics

Built-in / Free-standing

Built-in

Number of compressors

2

Number of independent cooling systems

2

Width of the product (mm)

756

Height (mm)

2125

Depth of the product

608

Net weight (kg)

193.033

Required niche size for installation (HxWxD)

2134.0 x 762.0 x 610

Door panel options

Not possible

Door hinge

Right reversible

Number of Adjustable Shelves in fridge compartment

2

Shelves for Bottles

No

Frost free system

Interior ventilator

Yes

Reversible Door Hinge

Yes

Length electrical supply cord (cm)

300

Noise level (dB(A) re 1 pW)

42

Multi-Flow Air Tower

Yes

Fast cooling switch

Yes

Fast freezing switch

No

Carbon Air Filter

No

Temperature Controlled Drawer

No

Humidity Control Drawer

Yes

Number of Door Bins - Refrigerator

3

Door bin adjustability - Refrigerator

No

Tilt-out door bins in fridge

No

Number of Gallon storage

1

No. of shelves in fridge

3

Number of shelves - Freezer

Shelf Adjustability - Freezer

No

Capacity of Water Tank [l]

Connection Rating (W)

300

Fuse protection (A)

10

Voltage (V)

220-240

Frequency (Hz)

50-60

Energy consumption (kWh)

Freezing capacity (kg)

Energy efficiency rating

Energy consumption annual (kWh/annum) - NEW (2010/30/EC)

301.00

Refrigerator Net capacity (l) - NEW (2010/30/EC)

308

Freezer Net capacity (l) - NEW (2010/30/EC)

110

Frost free system

Freezing capacity (kg/24h) - NEW (2010/30/EC)

14

Storage Period in Event of Power Failure (h)

17

Approval certificates

CE, VDE

Universal Product Code

Temperature adjustable from -14 °C to -24 °C.

4-star freezer compartment.

Freezing capacity 14 kg/24 h.

Storage time after a malfunction 17 h.

2 fully extendable inside drawers.

Interior lighting with 2 LED light spots, warm white light.

Net volume 110 litres.

Ice maker

Integrated in the freezer compartment, with fixed inlet water connection.

Particle filter for water inlet, integrated in ventilation grille area.

Can be switched off.

Ice cube production approx. 1.7 kg/24 h.

Removable ice storage container with approx. 3 kg capacity.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A++ + to D.

Energy consumption 301 kWh/year.

Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight:

Door 41 kg.

Drawer 10 kg.

Shut-off valve for water connection must be planned next to the appliance and always be accessible.

If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Connection

Total connected load 0.300 KW.

Connecting cable 3.0 m, detachable.


Water inlet.

Supply hose 2.0 m with 3/4 " connection.


Water pressure 2 to 8 bar.

GAGGENAU

RB472304
Vario fridge-freezer combination 400 series
With fresh cooling close to 0 °C
Fully integrated
Niche width 76.2 cm, Niche height 213.4 cm
Cooling section with one door and one fully extendable freezing drawer
2021-09-01
Page 2

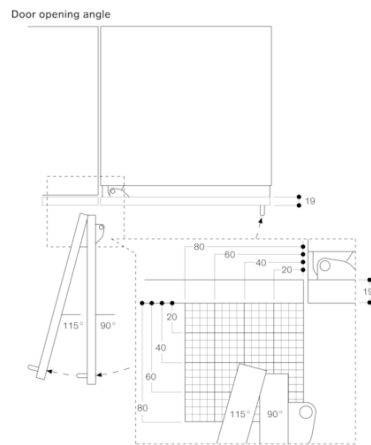


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

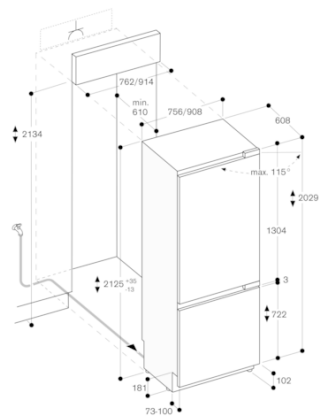

The maximum door panel dimensions are based on a clearance of 3 mm.

Base detail

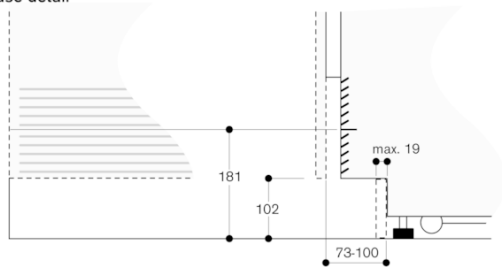

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

