

**AF210791**

#### Optional accessories

**AA210110:**

Active charcoal filter f. recirc. module

**AA211812:**

Recirculation module w.active charcoal

#### installation accessories

**AA210490:**

Lowering frame, 90cm

**AA210491:**

Installation kit for 90cm wide wall unit

#### Flat kitchen hood 200 series

**36", Stainless steel**

**AF210791**

Unobtrusive flat kitchen hood design thanks to integrated glass sheet in the steam screen  
Especially quiet operation thanks to integrated sound insulation

Steam screen extends by touching the handle bar

Especially high air output

Dimmable, neutral white LED light for ideal illumination of the cooktop

The patented lowering frame allows the flat kitchen hood to disappear completely into the upper cabinet

Air extraction or air recirculation system

Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odour reduction as in air extraction mode and long replacement intervals

#### Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591. Sound power level according to EN 60704-3.

Air extraction:

622 / 875m<sup>3</sup>/h.

64 / 71dB (A) re 1 pW.

51 / 58 dB (A) re 20 µPa.

Air recirculation:

614 / 824m<sup>3</sup>/h.

71 / 78dB (A) re 1 pW.

58 / 65 dB (A) re 20 µPa.

#### Features

Controls at front.

3 electronically controlled power levels and 1 intensive mode.

Grease filter saturation indicator.

Stainless steel grease filter, dishwasher-safe.

Neutral white LED light (3600 K), continuously dimmable.

Lamp output 2 x 5 W.

Illuminance 441 lx.

Light can be switched on separately.

Integrated sound insulation for quiet operation.

The fan is activated when the steam screen is extended.

Patented technology for extension of the steam screen.

Extendable steam screen 198 mm.

Airflow-optimised interior for efficient air circulation and ease of cleaning.

Patented easy mounting system for simple installation.

The package includes an one-way flap.

#### Planning notes

Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the activated charcoal filter.

The door of the upper cabinet must be fully open in order to change the activated charcoal filter.

To be installed in an upper cabinet without base.

The required cavity depth of the upper cabinet together with the lowering frame measures 335 mm.

The required cavity height of the upper cabinet together with the lowering frame measures 600 mm.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 43 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

#### Connection


Total connected load 430 W.

Total amps: 10 A.


120 V / 60 Hz.

Connecting cable 0.9 m, pluggable.



Upper cabinet for AF 210  
with AA 210 460/AA 210 490 lowering frame

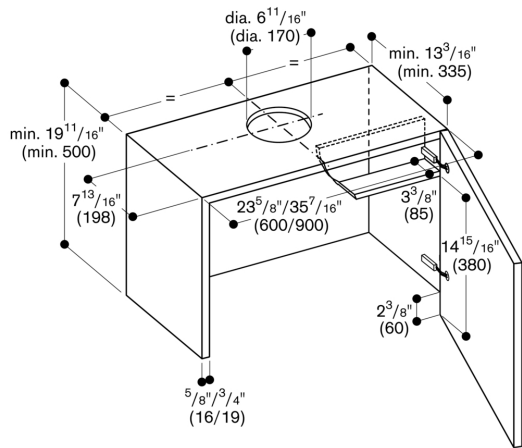


Upper cabinet for AF 210

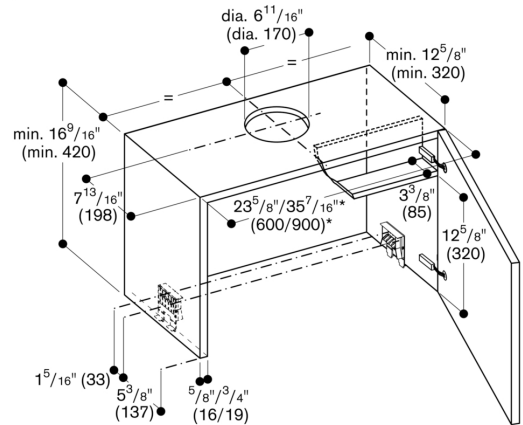


\* for upper cabinets measuring 35<sup>7</sup>/<sub>16</sub>" (90 cm),  
the AA 210 491 installation set is required in addition

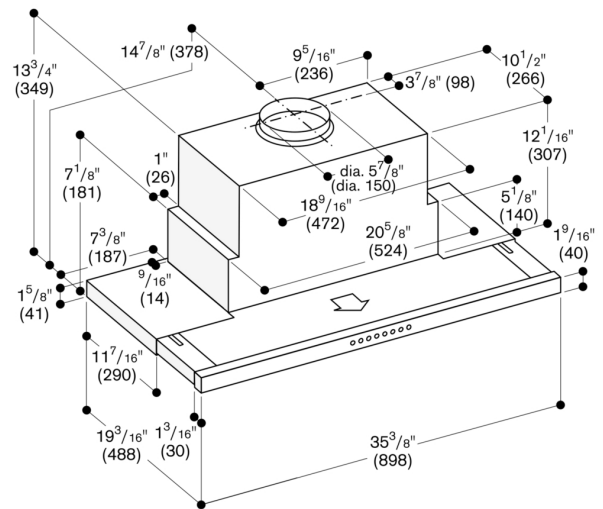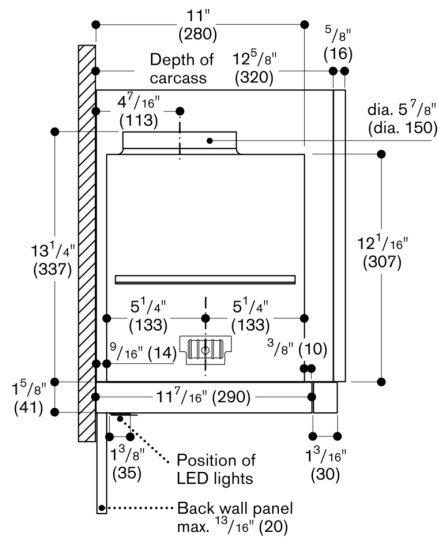



Cross-section of upper cabinet with AA 211 812 and AA 210 490/460 lowering frame

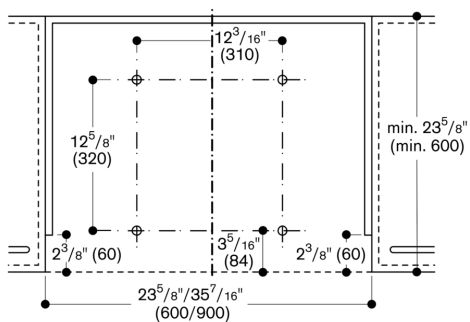

Fitting directly to the kitchen wall

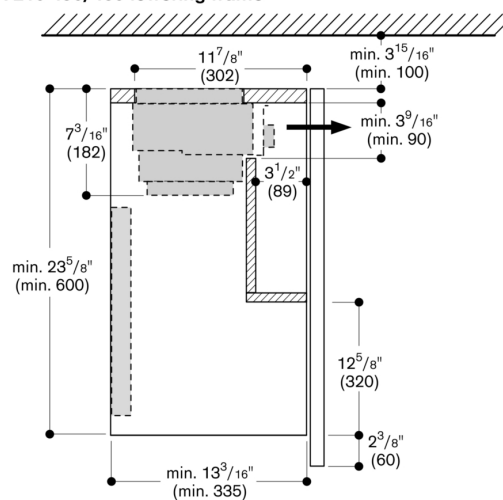

Cross-section of upper cabinet with AA 211 812

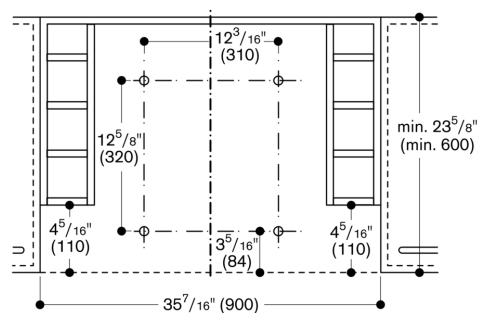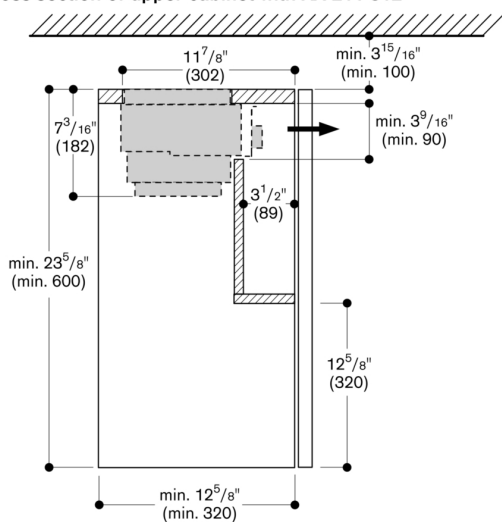

Kitchen units with side shelving units  
Fitting directly to the kitchen wall