



BM451110

Optional accessories

installation accessories

combi-microwave oven 400 series
60 x 45 cm, door hinge: left, stainless
steel-backed glass front
BM451110

Handleless door / automatic door opening
 Single operation and combination of microwave,
 grill and oven
 Sequential operation of up to 5 modes incl.
 programming of combined operation and rest
 time
 TFT touch display
 Panel-free appliance with surface control
 module
 Electronic temperature control
 Interior volume 36 litres

Programmes

Microwave operation with 5 output levels: 1000,
 600, 360, 180, 90 W.
 Oven operation with 4 heating methods:
 Hot air 40 °C and from 100 °C to 250 °C, Full
 surface grill + hot air from 100 °C to 250 °C,
 Full surface grill + circulated air from 100 °C to
 250 °C, Full surface grill with 3 levels of
 intensity, maximum output 2000 W.
 Heating methods with microwave output levels
 600, 360, 180 and 90 W freely combinable.
 15 automatic programmes with weight
 indication, customisable:
 4 defrosting programmes 4 cooking
 programmes 7 combination programmes
 Option to save individual recipes.

Handling

Automatic door opening.
 Rotary knob and TFT touch display operation.
 Clear text display.
 Information key with use indicators.
 Side-opening door opens up to 180° angle.

Features

Innowave.
 Rapid heating.
 Timer functions: cooking time, cooking time end,
 timer, stopwatch, long-term timer (certified by
 Star-K).
 4 tray levels.
 Actual temperature display.
 60 W halogen light on the side.

Safety

Thermally insulated door with triple glazing.
 Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass
 ceramic base.
 Interior back wall with catalytic coating.


Planning notes

Door hinge not reversible.
 Plan the niche without back wall.
 The door panel surface of the appliance extends
 47 mm from the furniture cavity.
 If the handle (optional accessory) is retrofitted,
 the outer edge of the door handle extends 94
 mm from the furniture cavity.

Consider the overhang, incl. the door handle
 where applicable, when planning to open
 drawers next to the appliance.
 When planning a corner solution, pay attention
 to the side-opening door and the minimum
 required distance to the wall.
 The mains socket needs to be planned outside
 of the built-in niche.

Connection

Total connected load 3.1 KW.
 Connecting cable 1.5 m without plug.

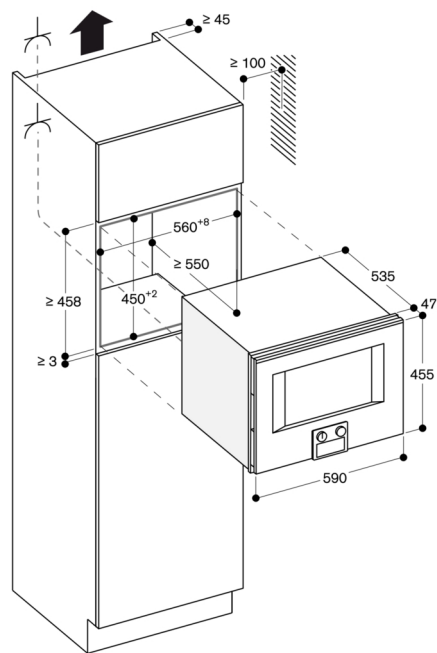

Socket
measurements in mm

Side view of BM 454/455 above BO

