



Color Variants

BO440411
Stainless steel-backed full glass door
Width 60 cm

Included accessories

1 x enamel baking tray.
suit. pyrolytic clean.
1 x glass pan.
1 x grill shelf.
1 x pluggable meat probe.

Optional accessories

BA016105
Pull-out system
BA026115
Baking tray, enamelled
BA036105
Wire rack, chromium-plated
BA046115
Glass tray
BA056133
Baking stone.
BA056145
Heating element for baking stone
BA226105
Grill tray, enamelled
BS020002
Pizza paddle, set of 2.
GN340230
Gastronorm roaster in cast aluminium.

Installation Accessories

BA476110
Handle bar, stainless steel

Product Variants

BO441411
Oven 400 series
Stainless steel-backed full glass door
Width 60 cm
Left-hinged
Controls at the top

BO440411
Oven 400 series
Stainless steel-backed full glass door
Width 60 cm
Right-hinged
Controls at the top

Handleless door / automatic door opening
13 heating methods, with core temperature probe and baking stone function
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 300 °C
Net volume 76 litres

Heating methods

Hot air.
Eco hot air.
Top + bottom heat.
Top heat.
Bottom heat.
Hot air + bottom heat.
Full surface grill + circulated air.
Full surface grill.
Compact grill.
Baking stone function.
Roaster function.
Dough proofing.
Defrosting.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Option to save individual recipes (incl. core temperature probe).
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Core temperature probe with automatic shut-off.
Baking stone socket.
Actual temperature display.
Rapid heating.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
60 W halogen light on the top.
10 W halogen light on the side.
Chromium-plated side shelf supports with 4 tray levels.

Safety

Thermally insulated door with double glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Back wall and ceiling with catalytic coating.
Gaggenau enamel.
Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.
The door panel surface of the appliance extends 47 mm from the furniture cavity.
If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity.
Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 90° door opening angle.

Characteristics

Color / Material Front
Stainless steel
Built-in / Free-standing
Built-in
Integrated Cleaning system
No
Required niche size for installation (HxWxD)
590-590 x 560-560 x 550
Dimensions of the product (mm)
595 x 590 x 547
Dimensions of the packed product (HxWxD) (mm)
770 x 710 x 660
Control Panel Material
without panel
Door Material
Stainless steel behind glass
Net weight (kg)
56.911
Usable volume of cavity (l)
76
Cooking method
Baking stone function, Bottom heat, Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot air and 1/1 bottom heating, Hot Air-Eco, Hot air grilling, Roaster function, Top heat
First cavity material
Enamelled
Number of interior lights
2
Approval certificates
Length electrical supply cord (cm)
180
Interior Lights - cavity 1
2
Pull-out system
Accessory
Clock function
Alarm, Off, On, timer
Included accessories
1 x enamel baking tray,suit. pyrolytic clean, 1 x glass pan, 1 x grill shelf, 1 x pluggable meat probe
Bake Element Wattages cavity 1 (W)
Broil Element Wattages cavity 1 (W)
3000
Convection Element Wattages cavity 1 (W)
2100
Microwave wattage cavity 1 (W)
Drawer wattage (W)

Consumption and connection features


Energy efficiency class - NEW (2010/30/EC)
A
Energy consumption per cycle conventional - NEW (2010/30/EC)
1.25
Energy consumption gas oven per cycle conventional - NEW (2010/30/EC)
Energy consumption per cycle forced air convection - NEW (2010/30/EC)
0.83
Energy consumption gas oven per cycle forced air convection - NEW (2010/30/EC)
Energy efficiency index (2010/30/EC)
95.4
Connection Rating (W)
3700
Current (A)
20
Voltage (V)
200
Frequency (Hz)
50-60
Plug type
fixed connection
Connecting cable type
Universal Product Code
Color / Material Front
Stainless steel
Alternative colors available
Energy input
Electric
Approval certificates
Length of electrical supply cord (in)

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.
The mains socket needs to be planned outside of the built-in niche.

Connection


Energy efficiency class A.
Total connected load 3.7 kW.
Plan a connection cable.

BO440411
Oven 400 series
Stainless steel-backed full glass door
Width 60 cm
Right-hinged
Controls at the top
2019-10-23
Page 2

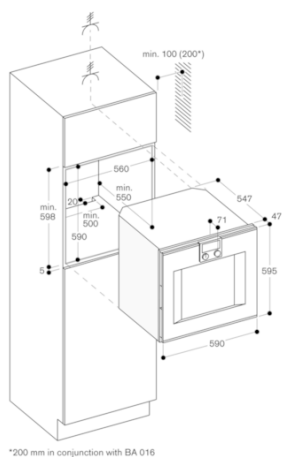


*200 mm in conjunction with BA 016

When installed next to each other

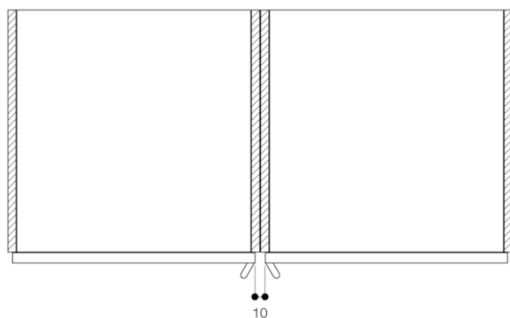

Cross section of the top/bottom door edge gaps

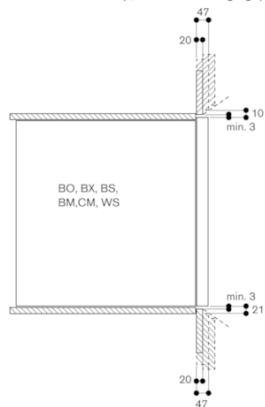

Air inlet cross section at the door edges

