



BO481111
Oven 400 series
Stainless steel-backed full glass door
Width 76 cm
Left-hinged
Controls at the top

Handleless door / automatic door opening
Pyrolytic system
17 heating methods with core temperature probe, rotisserie spit and baking stone function
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 300 °C
110 litres net volume

Heating methods

Hot air.
 Eco hot air.
 Top + bottom heat.
 Top + 1/3 bottom heat.
 Top heat.
 1/3 top + bottom heat.
 Bottom heat.
 Hot air + bottom heat.
 Hot air + 1/3 bottom heat.
 Full surface grill + circulated air.
 Full surface grill.
 Compact grill.
 Baking stone function.
 Roaster function.
 Dough proofing.
 Defrosting.
 Keeping warm.

Handling

Automatic door opening.
 Rotary knob and TFT touch display operation.
 Clear text display.
 Option to save individual recipes (incl. core temperature probe).
 Information key with use indicators.
 Side-opening door opens up to 180° angle.

Features

Core temperature probe with automatic shut-off.
 Rotisserie spit.
 Baking stone socket.
 Actual temperature display.
 Rapid heating.
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
 60 W halogen light on the top.
 2 x 10 W halogen light on the side.
 Enamelled side shelf supports with 5 tray levels, pyrolysis-safe.

Safety

Thermally insulated door with quadruple glazing.
 Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning

Pyrolytic system.
 Gaggenau enamel.
 Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.
 The door panel surface of the appliance extends 47 mm from the furniture cavity.
 If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity.

Color Variants

BO481111
Stainless steel-backed full glass door
Width 76 cm

Included accessories

1 x enamel baking tray.
 suit. pyrolytic clean.
 1 x rotary spit.
 1 x grill shelf.
 1 x grill tub with grid.
 1 x pluggable meat probe.

Optional accessories

BA018105
Pull-out system
BA028115
Baking tray, enamelled
BA038105
Wire rack, chromium-plated
BA058115
Heating element for baking stone and Gastronorm roaster.
BA058133
Baking stone.
BS020002
Pizza paddle, set of 2.
GN340230
Gastronorm roaster in cast aluminium.

Installation Accessories

BA478110
Handle bar, stainless steel

Product Variants

BO480111
Oven 400 series
Stainless steel-backed full glass door
Width 76 cm
Right-hinged
Controls at the top

Characteristics

Color / Material Front
 Stainless steel
Built-in / Free-standing
 Built-in
Integrated Cleaning system
 Pyrolytic
Required niche size for installation (HxWxD)
 665-665 x 724-724 x 550
Dimensions of the product (mm)
 670 x 752 x 547
Dimensions of the packed product (HxWxD) (mm)
 860 x 760 x 850
Control Panel Material
 without panel
Door Material
 Stainless steel behind glass
Net weight (kg)
 79.161
Usable volume of cavity (l)
 110
Cooking method
 Baking stone function, Bottom heat, Bottom heating, 1/3 top heat., Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot air and 1/1 bottom heating, Hot air and 1/3 bottom heating, Hot Air-Eco, Hot air grilling, Roaster function, Top heat, Top heating, 1/3 bottom heat., warming
First cavity material
 Enamelled
Number of interior lights
 3
Approval certificates
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
 Interior Lights - cavity 1
 3
Pull-out system
 Accessory
Clock function
 Alarm, Off, On, timer
Included accessories
 1 x enamel baking tray, suit. pyrolytic clean, 1 x rotary spit, 1 x grill shelf, 1 x grill tub with grid, 1 x pluggable meat probe
Bake Element Wattages cavity 1 (W)
Broil Element Wattages cavity 1 (W)
 3900
Convection Element Wattages cavity 1 (W)
 1900
Microwave wattage cavity 1 (W)
Drawer wattage (W)

Consumption and connection features
Energy efficiency class - NEW (2010/30/EC)
 A
Energy consumption per cycle conventional - NEW (2010/30/EC)
 1.53
Energy consumption gas oven per cycle conventional - NEW (2010/30/EC)
Energy consumption per cycle forced air convection - NEW (2010/30/EC)
 0.96
Energy consumption gas oven per cycle forced air convection - NEW (2010/30/EC)
Energy efficiency index (2010/30/EC)
 95.0
Connection Rating (W)
 5520
Current (A)
 25
Voltage (V)
 220-240
Frequency (Hz)
 50
Plug type
 fixed connection, no plug
Connecting cable type
Universal Product Code
 825225914327
Color / Material Front
 Stainless steel

Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 90° door opening angle.



To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing. The mains socket needs to be planned outside of the built-in niche.

Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 5.5 kW.
 Plan a connection cable.

BO481111
Oven 400 series
Stainless steel-backed full glass door
Width 76 cm
Left-hinged
Controls at the top
 2019-10-29
 Page 2

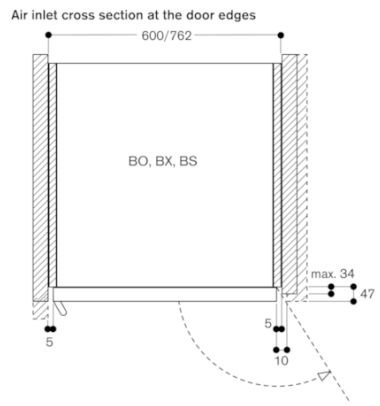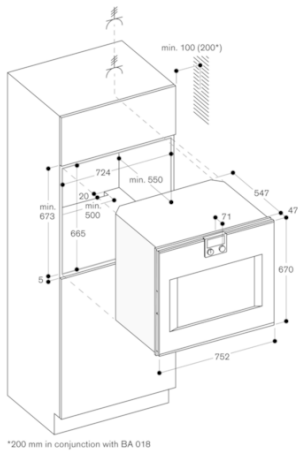

When installed next to each other

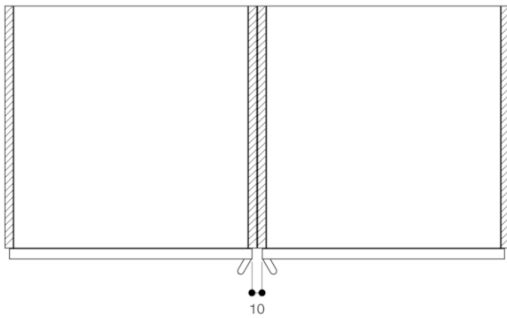

Cross section of the top/bottom door edge gaps

