



BSP220100
Steam oven 200 Series
Full glass door in Gaggenau Anthracite
Width 60 cm
Right-hinged
Controls at the top

Color Variants

BSP220100
Full glass door in Gaggenau Anthracite
Width 60 cm
BSP220110
Full glass door in Gaggenau Metallic
Width 60 cm
BSP220130
Full glass door in Gaggenau Silver
Width 60 cm

Included accessories

1 x STS tray-GN2/3-punched-40 mm deep.
1 x STS tray-GN2/3-unpunched-40 mm deep.
1 x grid.

Optional accessories

GN114130
Gastronorm insert, stainless steel, GN 1/3
GN114230
Gastronorm insert, stainless steel, GN 2/3
GN124130
Gastronorm insert, stainless steel, GN 1/3
GN124230
Gastronorm insert, stainless steel, GN 2/3
GN340230
Gastronorm roaster in cast aluminium.

Product Variants

BSP221100
Steam oven 200 Series
Full glass door in Gaggenau Anthracite
Width 60 cm
Left-hinged
Controls at the top

Flush installation
Water tank
Steaming without pressure with 100% humidity from 30 °C to 100 °C
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 100 °C

Heating methods

100 % humidity.
Slow steaming.
Dough proofing.
Defrosting.
Regenerating.
Low temperature steaming.
Net volume 45 litres

Handling

Rotary knob and TFT touch display operation.
Clear text display.
Information key with use indicators.
Side-opening door opens up to 110° angle.

Features

Removable 1.3 litre water tank.
Water level warning.
Actual temperature display.
Timer functions: cooking time, cooking time end, timer, stopwatch.
Electronic boiling point detection.
48 W halogen light on the side.
Hygienic stainless steel cooking interior.
4 tray levels.

Safety

Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Cleaning aid.
Descaling programme.

Planning notes

Door hinge not reversible.
No other electrical appliances should be installed above the BSP.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
The outer edge of the door handle extends 72 mm from the furniture cavity.
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 110° door opening angle.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.
The mains socket needs to be planned outside of the built-in niche.

Connection

Total connected load 1.9 KW.
Connection cable 1.5 m without plug.

Characteristics

Color / Material Front

Anthracite

Built-in / Free-standing

Built-in

Door opening

Lateral

Required niche size for installation (HxWxD)

Dimensions
455 x 590 x 547

Dimensions of the packed product (HxWxD) (mm)

575 x 660 x 690

Control Panel Material

Door Material

Glass

Net weight (kg)

34.308

Approval certificates

CCC, CE, China, China ROHS 20, Ukraine, VDE

Length electrical supply cord (cm)

150

Connection rating (W)

1900

Current (A)

8

Voltage (V)

220-240

Frequency (Hz)

50; 60

Plug type

fixed connection, no plug

Connecting cable type

Approval certificates


CCC, CE, China, China ROHS 20, Ukraine, VDE

Consumption and connection features

2021-04-07

Page 1

BSP220100
Steam oven 200 Series
Full glass door in Gaggenau Anthracite
Width 60 cm
Right-hinged
Controls at the top
2021-04-07
Page 2

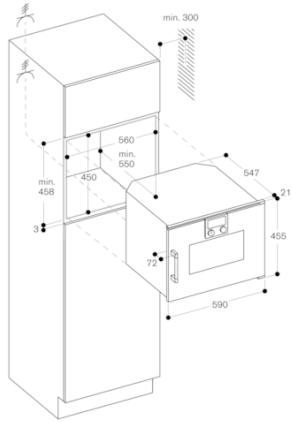

Side view of BSP, BMP over BOP

