



**BSP220130**  
**Steam oven 200 Series**  
**Full glass door in Gaggenau Silver**  
**Width 60 cm**  
**Right-hinged**  
**Controls at the top**

Flush installation  
Water tank  
Steaming without pressure with 100% humidity from 30 °C to 100 °C  
TFT touch display  
Panel-free appliance with surface control module  
Electronic temperature control from 30 °C to 100 °C  
Net volume 45 litres

**Heating methods**  
100 % humidity.  
Slow steaming.  
Dough proofing.  
Defrosting.  
Regenerating.  
Low temperature steaming.

**Handling**  
Rotary knob and TFT touch display operation.  
Clear text display.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

**Features**  
Removable 1.3 litre water tank.  
Water level warning.  
Actual temperature display.  
Timer functions: cooking time, cooking time end, timer, stopwatch.  
Electronic boiling point detection.  
48 W halogen light on the side.  
Hygienic stainless steel cooking interior.  
4 tray levels.

**Safety**  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

**Cleaning**  
Cleaning aid.  
Descaling programme.

**Planning notes**  
Door hinge not reversible.  
No other electrical appliances should be installed above the BSP.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
The outer edge of the door handle extends 72 mm from the furniture cavity.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
When planning a corner solution, pay attention to the 110° door opening angle.  
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.  
The mains socket needs to be planned outside of the built-in niche.

**Connection**  
Total connected load 1.9 KW.  
Connection cable 1.5 m without plug.

**Characteristics**  
**Color / Material Front**  
**Built-in / Free-standing**  
Built-in  
**Door opening**  
Lateral  
**Required niche size for installation (HxWxD)**  
**Dimensions**  
455 x 590 x 547  
**Dimensions of the packed product (HxWxD) (mm)**  
575 x 660 x 690  
**Control Panel Material**  
**Door Material**  
Glass  
**Net weight (kg)**  
34.358  
**Approval certificates**  
CE, VDE  
**Length electrical supply cord (cm)**  
150  
**Connection rating (W)**  
1900  
**Current (A)**  
8  
**Voltage (V)**  
220-240  
**Frequency (Hz)**  
50; 60  
**Plug type**  
fixed connection, no plug  
**Connecting cable type**  
**Approval certificates**  
CE, VDE

**Consumption and connection features**

2021-04-06  
Page 1

**Color Variants**

**BSP220130**  
Full glass door in Gaggenau Silver  
Width 60 cm  
**BSP220100**  
Full glass door in Gaggenau Anthracite  
Width 60 cm  
**BSP220110**  
Full glass door in Gaggenau Metallic  
Width 60 cm


**Included accessories**

1 x STS tray-GN2/3-punched-40 mm deep.  
1 x STS tray-GN2/3-unpunched-40 mm deep.  
1 x grid.

**Optional accessories**

**GN114130**  
Gastronorm insert, stainless steel, GN 1/3  
**GN114230**  
Gastronorm insert, stainless steel, GN 2/3  
**GN124130**  
Gastronorm insert, stainless steel, GN 1/3  
**GN124230**  
Gastronorm insert, stainless steel, GN 2/3  
**GN340230**  
Gastronorm roaster in cast aluminium.

BSP220130  
Steam oven 200 Series  
Full glass door in Gaggenau Silver  
Width 60 cm  
Right-hinged  
Controls at the top  
2021-04-06  
Page 2

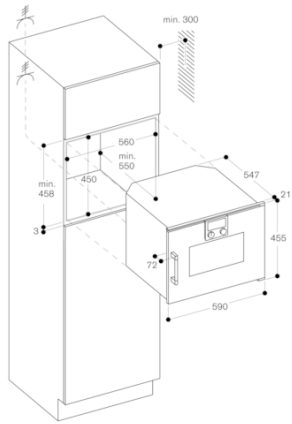

Side view of BSP, BMP over BOP

