



BSP221130
Steam oven 200 Series
Full glass door in Gaggenau Silver
Width 60 cm
Left-hinged
Controls at the top

Color Variants

BSP221130
Full glass door in Gaggenau Silver
Width 60 cm
BSP221100
Full glass door in Gaggenau Anthracite
Width 60 cm
BSP221110
Full glass door in Gaggenau Metallic
Width 60 cm

Included accessories

1 x STS tray-GN2/3-punched-40 mm deep.
1 x STS tray-GN2/3-unpunched-40 mm deep.
1 x grid.

Optional accessories

GN114130
Gastronorm insert, stainless steel, GN 1/3
GN114230
Gastronorm insert, stainless steel, GN 2/3
GN124130
Gastronorm insert, stainless steel, GN 1/3
GN124230
Gastronorm insert, stainless steel, GN 2/3
GN340230
Gastronorm roaster in cast aluminium.

Product Variants

BSP220130
Steam oven 200 Series
Full glass door in Gaggenau Silver
Width 60 cm
Right-hinged
Controls at the top

Flush installation
Water tank
Steaming without pressure with 100% humidity from 30 °C to 100 °C
TFT touch display
Panel-free appliance with surface control module
Electronic temperature control from 30 °C to 100 °C
Net volume 45 litres

Heating methods

100 % humidity.
Slow steaming.
Dough proofing.
Defrosting.
Regenerating.
Low temperature steaming.

Handling

Rotary knob and TFT touch display operation.
Clear text display.
Information key with use indicators.
Side-opening door opens up to 110° angle.

Features

Removable 1.3 litre water tank.
Water level warning.
Actual temperature display.
Timer functions: cooking time, cooking time end, timer, stopwatch.
Electronic boiling point detection.
48 W halogen light on the side.
Hygienic stainless steel cooking interior.
4 tray levels.

Safety

Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Cleaning aid.
Descaling programme.

Planning notes

Door hinge not reversible.
No other electrical appliances should be installed above the BS.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
The outer edge of the door handle extends 72 mm from the furniture cavity.
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 110° door opening angle.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.
The mains socket needs to be planned outside of the built-in niche.

Connection

Total connected load 1.9 KW.
Connection cable 1.5 m without plug.


Characteristics

Color / Material Front
Built-in / Free-standing
Built-in
Door opening
Lateral
Required niche size for installation (HxWxD)
Dimensions
455 x 590 x 547
Dimensions of the packed product (HxWxD) (mm)
575 x 660 x 690
Control Panel Material
Door Material
Glass
Net weight (kg)
34.658
Approval certificates
CE, VDE
Length electrical supply cord (cm)
150
Connection rating (W)
1900
Current (A)
8
Voltage (V)
220-240
Frequency (Hz)
50; 60
Plug type
fixed connection, no plug
Connecting cable type
Approval certificates
CE, VDE

Consumption and connection features

2021-01-27
Page 1

BSP221130
Steam oven 200 Series
Full glass door in Gaggenau Silver
Width 60 cm
Left-hinged
Controls at the top
2021-01-27
Page 2

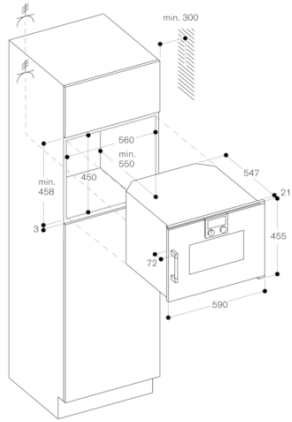

Side view of BSP, BMP over BOP

