



**BSP250110**  
**Combi-steam oven 200 series**  
**Full glass door in Gaggenau Metallic**  
**Width 60 cm**  
**Right-hinged**  
**Controls at the top**



Flush installation  
 Water tank  
 Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%  
 TFT touch display  
 Panel-free appliance with surface control module  
 Steaming without pressure  
 Electronic temperature control from 30 °C to 230 °C  
 Core temperature probe, removable  
 Net volume 42 litres

**Heating methods**  
 Hot air + 100 % humidity.  
 Hot air + 80 % humidity.  
 Hot air + 60 % humidity.  
 Hot air + 30 % humidity.  
 Hot air + 0 % humidity.  
 Dough proofing.  
 Defrosting.  
 Regenerating.  
 Low temperature cooking.

**Handling**  
 Rotary knob and TFT touch display operation.  
 Clear text display.  
 Option to save individual recipes (incl. core temperature probe).  
 Information key with use indicators.  
 Side-opening door opens up to 110° angle.

**Features**  
 Removable 1.3 litre water tank.  
 Water level warning.  
 Core temperature probe with automatic shut-off.  
 Actual temperature display.  
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.  
 Electronic boiling point detection.  
 48 W halogen light on the side.  
 Hygienic stainless steel cooking interior.  
 4 tray levels.

**Safety**  
 Child lock.  
 Safety shut-off.  
 Cooled housing with temperature protection.

**Cleaning**  
 Cleaning aid.  
 Drying programme.  
 Descaling programme.  
 Grease filter, dishwasher-safe.

**Planning notes**  
 Door hinge not reversible.  
 No other electrical appliances should be installed above the BS.  
 The door panel surface of the appliance extends 21 mm from the furniture cavity.  
 The outer edge of the door handle extends 72 mm from the furniture cavity.  
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the 110° door opening angle.  
 To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

**Characteristics**  
**Color / Material Front**  
**Built-in / Free-standing**  
 Built-in  
**Door opening**  
 Lateral  
**Required niche size for installation (HxWxD)**  
**Dimensions**  
 455 x 590 x 547  
**Dimensions of the packed product (HxWxD) (mm)**  
 575 x 660 x 690  
**Control Panel Material**  
**Door Material**  
 Glass  
**Net weight (kg)**  
 35.908  
**Approval certificates**  
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE  
**Length electrical supply cord (cm)**  
 150  
**Cooking method**  
 Defrost, fermentation, Hot Air, Hot air + steam 100%, Hot air + steam 30%, Hot air + steam 60%, Hot air + steam 80%, low temperature steam, Regeneration  
**Time-setting Options**  
**Electrical connection rating (W)**  
**Current (A)**  
 8  
**Voltage (V)**  
 220-240  
**Frequency (Hz)**  
 50; 60  
**Plug type**  
 fixed connection, no plug  
**Connecting cable type**  
**Approval certificates**  
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE  
**Universal Product Code**  
 825225915003  
**Color / Material Front**  
**Alternative colors available**  
 BSP250100, BSP250130  
**Energy input**  
 Electric  
**Current (A)**  
 8  
**Voltage (V)**  
 220-240  
**Frequency (Hz)**  
 50; 60  
**Approval certificates**  
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE  
**Length of electrical supply cord (in)**  
**Plug type**  
 fixed connection, no plug  
**Appliance Dimensions (h x w x d) (in)**  
**Required cutout/niche size for installation (in)**  
**Dimensions of the packed product (in)**  
**Net weight (lbs)**  
 79.000  
**Gross weight (lbs)**  
 84.000

**Consumption and connection features**  
 2021-05-26  
 Page 1

The mains socket needs to be planned outside of the built-in niche.

**Connection**  
 Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.  
 Total connected load 1.9 KW.  
 Connection cable 1.5 m without plug.

**Color Variants**

**BSP250110**  
**Full glass door in Gaggenau Metallic**  
**Width 60 cm**  
**BSP250100**  
**Full glass door in Gaggenau Anthracite**  
**Width 60 cm**

**Included accessories**

1 x STS tray-GN2/3-punched-40 mm deep.  
 1 x STS tray-GN2/3-unpunched-40 mm deep.  
 1 x grid.  
 1 x pluggable meat probe.


**Optional accessories**

**GN114130**  
 Gastronorm insert, stainless steel, GN 1/3  
**GN114230**  
 Gastronorm insert, stainless steel, GN 2/3  
**GN124130**  
 Gastronorm insert, stainless steel, GN 1/3  
**GN124230**  
 Gastronorm insert, stainless steel, GN 2/3  
**GN340230**  
 Gastronorm roaster in cast aluminium.

**Product Variants**

**BSP251110**  
**Combi-steam oven 200 series**  
**Full glass door in Gaggenau Metallic**  
**Width 60 cm**  
**Left-hinged**  
**Controls at the top**

BSP250110  
Combi-steam oven 200 series  
Full glass door in Gaggenau Metallic  
Width 60 cm  
Right-hinged  
Controls at the top  
2021-05-26  
Page 2

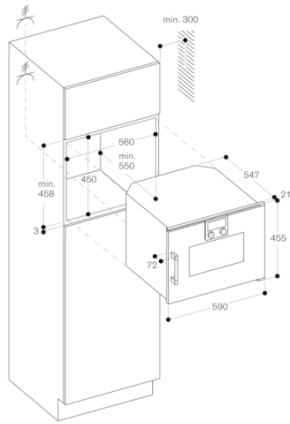

Side view of BSP, BMP over BOP

