



BSP251100
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
Left-hinged
Controls at the top

Color Variants

BSP251100
Full glass door in Gaggenau Anthracite
Width 60 cm
BSP251110
Full glass door in Gaggenau Metallic
Width 60 cm
BSP251130
Full glass door in Gaggenau Silver
Width 60 cm

Included accessories

1 x STS tray-GN2/3-punched-40 mm deep.
 1 x STS tray-GN2/3-unpunched-40 mm deep.
 1 x grid.
 1 x pluggable meat probe.

Optional accessories

GN114130
Gastronorm insert, stainless steel, GN 1/3
GN114230
Gastronorm insert, stainless steel, GN 2/3
GN124130
Gastronorm insert, stainless steel, GN 1/3
GN124230
Gastronorm insert, stainless steel, GN 2/3
GN340230
Gastronorm roaster in cast aluminium.

Product Variants

BSP250100
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
Right-hinged
Controls at the top

Flush installation
 Water tank
 Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
 TFT touch display
 Panel-free appliance with surface control module
 Steaming without pressure
 Electronic temperature control from 30 °C to 230 °C
 Core temperature probe, removable
 Net volume 42 litres

Heating methods

Hot air + 100 % humidity.
 Hot air + 80 % humidity.
 Hot air + 60 % humidity.
 Hot air + 30 % humidity.
 Hot air + 0 % humidity.
 Dough proofing.
 Defrosting.
 Regenerating.
 Low temperature cooking.

Handling

Rotary knob and TFT touch display operation.
 Clear text display.
 Option to save individual recipes (incl. core temperature probe).
 Information key with use indicators.
 Side-opening door opens up to 110° angle.

Features

Removable 1.3 litre water tank.
 Water level warning.
 Core temperature probe with automatic shut-off.
 Actual temperature display.
 Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
 Electronic boiling point detection.
 48 W halogen light on the side.
 Hygienic stainless steel cooking interior.
 4 tray levels.

Safety

Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning

Cleaning aid.
 Drying programme.
 Descaling programme.
 Grease filter, dishwasher-safe.

Planning notes

Door hinge not reversible.
 No other electrical appliances should be installed above the BS.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 The outer edge of the door handle extends 72 mm from the furniture cavity.
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
 When planning a corner solution, pay attention to the 110° door opening angle.
 To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

Characteristics

Color / Material Front
 Anthracite
Built-in / Free-standing
 Built-in
Door opening
 Lateral
Required niche size for installation (HxWxD)
Dimensions
 455 x 590 x 547
Dimensions of the packed product (HxWxD) (mm)
 575 x 660 x 690
Control Panel Material
Door Material
 Glass
Net weight (kg)
 36.008
Approval certificates
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord (cm)
 150
Cooking method
 Defrost, fermentation, Hot Air, Hot air + steam 100%, Hot air + steam 30%, Hot air + steam 60%, Hot air + steam 80%, low temperature steam, Regeneration
Time-setting Options
Electrical connection rating (W)
Current (A)
 8
Voltage (V)
 220-240
Frequency (Hz)
 50; 60
Plug type
 fixed connection, no plug
Connecting cable type
Approval certificates
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Universal Product Code
 825225915027
Color / Material Front
 Anthracite
Alternative colors available
 BSP251110, BSP251130
Energy input
 Electric
Current (A)
 8
Voltage (V)
 220-240
Frequency (Hz)
 50; 60
Approval certificates
 Australia Standards, CE, Eurasian, G-Mark, Ukraine, VDE
Length of electrical supply cord (in)
Plug type
 fixed connection, no plug
Appliance Dimensions (h x w x d) (in)
Required cutout/niche size for installation (in)
Dimensions of the packed product (in)
Net weight (lbs)
 79.000
Gross weight (lbs)
 84.000

Consumption and connection features


2021-02-22
 Page 1

The mains socket needs to be planned outside of the built-in niche.

Connection

Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.
 Total connected load 1.9 KW.
 Connection cable 1.5 m without plug.

BSP251100
Combi-steam oven 200 series
Full glass door in Gaggenau Anthracite
Width 60 cm
Left-hinged
Controls at the top
2021-02-22
Page 2

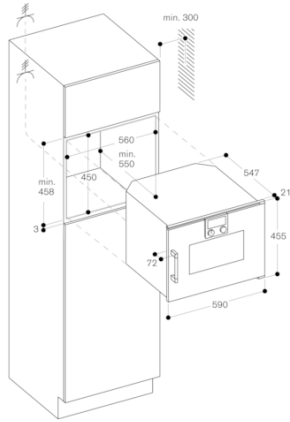

Side view of BSP, BMP over BOP

