



#### Color Variants

CI262103

Frameless

Width 60 cm

#### Optional accessories

CA051300

Teppan Yaki plate made of multi ply material

CA052300

Griddle plate in cast aluminium

CA060300

Cooking sensor for temperature regulation within pots

CA230100

Black magnetic knob for induction cooktop 200 series

GP900001

Stainless steel frying sensor pan

GP900002

Stainless steel frying sensor pan

GP900003

Stainless steel frying sensor pan

CI262103

Flex induction cooktop 200 series

Frameless

Width 60 cm

Frameless for flush mounting  
Flex function for combining the rectangular cooking areas  
Free positioning of cookware inside combined cooking areas  
Cooking sensor function for temperature control in pots  
Frying sensor function for temperature control in pans  
Twist-Pad control with removable magnetic knob  
Easy control of all functions with bicoloured display

#### Cooking zones

2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W).

1 induction cooking zone ø 15 cm (1400 W, with booster 2200 W).

#### Handling

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.

Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.

Cooking sensor function (in use with cooking sensor CA 060 300).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Options menu.

Power management.

#### Safety

Main switch.

Operation indicator.

Pot detection.

2-stage residual heat indication.

Child lock.

Safety shut-off.

#### Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Immersion depth 56 mm.

Intermediate shelf is recommended.

Appliance must be fixed from underneath.

Cooktop clamping range: 20 - 40 mm.

Appliance weight: approx. 13 kg.

#### Connection

Total connected load 7.4 kW.

Connecting cable 1.5 m without plug.

#### Characteristics

Product name/family

Cooking zone ceramic

Construction type

Built-in

Energy input

Electric

Total number of positions that can be used at the same time

4

Type of control setting devices

Required niche size for installation (HxWxD)

56 x 560-576 x 500-516

Width of the product (mm)

572

Dimensions of the product (mm)

56 x 572 x 512

Dimensions of the packed product (HxWxD) (mm)

126 x 753 x 603

Net weight (kg)

12.956

Gross weight (kg)

14.0

Residual heat indicator

Separate

Location of control panel

Hob front

Type of external control possibility

Basic surface material

Ceramic

Color of surface

Black

Color of frame

Approval certificates

AENOR, CE

Length electrical supply cord (cm)

150

Knob Material

Full metal

Sealed Burners

No

heating with booster

All

Type of pan support

Natural Gas Connection Rating (BTU)

LP Gas Connection Rating (BTU)

Dimension of 1st heating element (in)

Power of heating element (kW)

Power of 1st burner (BTU)

Dimension of 2nd heating element (in)

Power of 2nd heating element (kW)

3.3

Power of 2nd burner (BTU)

Dimension of 3rd heating element (in)

Power of 3rd heating element (kW)

Power of 3rd burner (BTU)

Dimension of 4th heating element (in)

Power of 4th heating element (kW)

Power of 4th burner (BTU)

Dimension of 5th heating element (in)

Power of 5th heating element (kW)

1.4

Power of 5th burner (BTU)

Dimension of 6th heating element (in)

Power of heating element (kW in boost)

Power of 2nd heating element (kW in boost)

3.7

Power of 3rd heating element (kW in boost)

Power of 4th heating element (kW in boost)

Power of 5th heating element (kW in boost)

[2.2]

Power of 6th heating element (kW in boost)

Consumption and connection features

Electrical connection rating (W)

7400

Gas connection rating (W)

Current (A)


Voltage (V)

220-240

Frequency (Hz)

60; 50


Universal Product Code

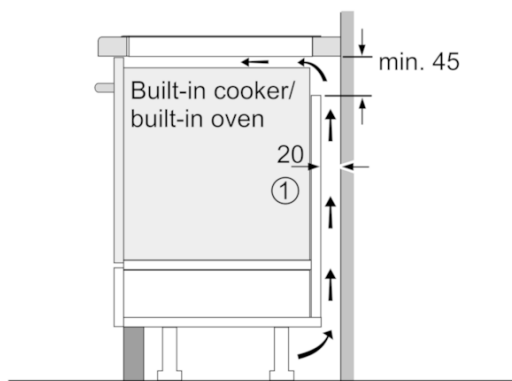


①  
 Ventilation gap must  
 be present

All measurements in mm

~~XXXXXXXXXXXXXXXXXXXX~~

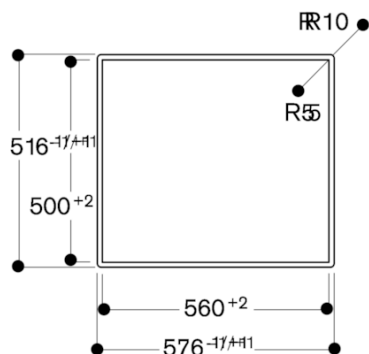

## Cross section

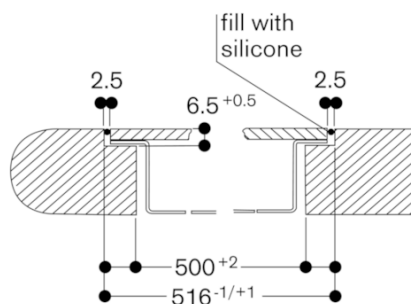

~~XXXXXXXXXXXXXXXXXXXX~~

