



#### Color Variants

CI262113  
Stainless steel frame  
Width 60 cm

#### Optional accessories

CA051300  
Teppan Yaki plate made of multi ply material  
CA052300  
Griddle plate in cast aluminium  
CA060300  
Cooking sensor for temperature regulation within pots  
CA230100  
Black magnetic knob for induction cooktop 200 series  
GP900001  
Stainless steel frying sensor pan  
GP900002  
Stainless steel frying sensor pan  
GP900003  
Stainless steel frying sensor pan

CI262113  
Flex induction cooktop 200 series  
Stainless steel frame  
Width 60 cm

Sturdy stainless steel frame  
Flex function for combining the rectangular cooking areas  
Free positioning of cookware inside combined cooking areas  
Cooking sensor function for temperature control in pots  
Frying sensor function for temperature control in pans  
Twist-Pad control with removable magnetic knob  
Easy control of all functions with bicoloured display

#### Cooking zones

2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).  
1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W).  
1 induction cooking zone ø 15 cm (1400 W, with booster 2200 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

#### Safety

Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.

#### Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
The wok pan WP 400 001 cannot be used with this appliance.  
Immersion depth 55 mm.  
Intermediate shelf is recommended.  
Appliance must be fixed from underneath.  
Cooktop clamping range: 20 - 40 mm.  
Appliance weight: approx. 11 kg.


#### Connection

Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.

Characteristics
Product name/family
Cooking zone ceramic
Construction type
Built-in
Energy input
Electric
Total number of positions that can be used at the same time
4
Type of control setting devices
Required niche size for installation (HxWxD)
55 x 560-560 x 490-490
Width of the product (mm)
590
Dimensions of the product (mm)
55 x 590 x 520
Dimensions of the packed product (HxWxD) (mm)
126 x 753 x 603
Net weight (kg)
11.426
Gross weight (kg)
13.0
Residual heat indicator
Separate
Location of control panel
Hob front
Type of external control possibility
Basic surface material
Ceramic
Color of surface
Black, Stainless steel
Color of frame
Stainless steel
Approval certificates
AENOR, CE
Length electrical supply cord (cm)
150
Knob Material
Full metal
Sealed Burners
No
heating with booster
All
Type of pan support
Natural Gas Connection Rating (BTU)
LP Gas Connection Rating (BTU)
Dimension of 1st heating element (in)
Power of heating element (kW)
Power of 1st burner (BTU)
Dimension of 2nd heating element (in)
Power of 2nd heating element (kW)
3.3
Power of 2nd burner (BTU)
Dimension of 3rd heating element (in)
Power of 3rd heating element (kW)
Power of 3rd burner (BTU)
Dimension of 4th heating element (in)
Power of 4th heating element (kW)
Power of 4th burner (BTU)
Dimension of 5th heating element (in)
Power of 5th heating element (kW)
1.4
Power of 5th burner (BTU)
Dimension of 6th heating element (in)
Power of heating element (kW in boost)
Power of 2nd heating element (kW in boost)
3.7
Power of 3rd heating element (kW in boost)
Power of 4th heating element (kW in boost)
Power of 5th heating element (kW in boost)
[2.2]
Power of 6th heating element (kW in boost)

#### Consumption and connection features

Electrical connection rating (W)  
7400  
Gas connection rating (W)  
Current (A)  
Voltage (V)  
220-240  
Frequency (Hz)  
60; 50

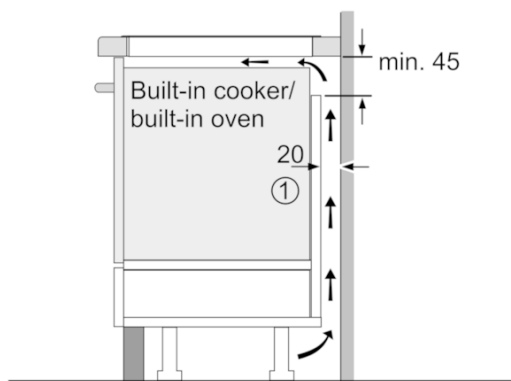

①  
Ventilation gap must  
be present

All measurements in mm

