



#### Color Variants

CI282101

Frameless

Width 80 cm

#### Optional accessories

CA051300

Teppan Yaki plate made of multi ply material

CA052300

Griddle plate in cast aluminium

CA060300

Cooking sensor for temperature regulation within pots

CA230100

Black magnetic knob for induction cooktop 200 series

GP900001

Stainless steel frying sensor pan

GP900002

Stainless steel frying sensor pan

GP900003

Stainless steel frying sensor pan

GP900004

Stainless steel frying sensor pan

CI282101

Flex induction cooktop 200 series

Frameless

Width 80 cm

Frameless for flush mounting

Flex function for combining the rectangular cooking areas

Free positioning of cookware inside combined cooking areas

Cooking sensor function for temperature control in pots

Professional cooking function for splitting the cooktop into predefined heat areas

Frying sensor function for temperature control in pans

Twist-Pad control with removable magnetic knob

Easy control of all functions with bicoloured display

#### Cooking zones

2 flex induction cooking areas 19x24 cm (2200 W, with booster 3700 W), linked together 38x24 cm (3300 W, with booster 3700 W).

1 induction cooking zone ø 28 cm (2600 W, with booster 3700 W).

1 induction cooking zone ø 15 cm (1400 W, with booster 2200 W).

#### Handling

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.

Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.

Professional cooking function.

Cooking sensor function (in use with cooking sensor CA 060 300).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

#### Safety

Main switch.

Operation indicator.

Pot detection.

2-stage residual heat indication.

Child lock.

Safety shut-off.

#### Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Intermediate shelf is recommended.

Appliance must be fixed from underneath.

Appliance weight: approx. 16 kg.

#### Characteristics

Product name/family

Cooking zone ceramic

Construction type

Built-in

Energy input

Electric

Total number of positions that can be used at the same time

4

Type of control setting devices

Required niche size for installation (HxWxD)

Width of the appliance

793

Dimensions

56 x 793 x 513

Dimensions of the packed product (HxWxD)

126 x 953 x 608

Net weight

16.256

Gross weight

17.9

Residual heat indicator

Separate

Location of control panel

Hob front

Type of external control possibility

Basic surface material

Ceramic

Color of surface

Black

Color of frame

Approval certificates

AENOR, CE

Length electrical supply cord

150

Knob Material

Full metal

Sealed Burners

No

heating with booster

All

Type of pan support

Natural Gas Connection Rating

LP Gas Connection Rating

Dimension of 1st heating element (in

Power of heating element (kW)

Power of 1st burner

Dimension of 2nd heating element (in

Power of 2nd heating element (kW)

3.3

Power of 2nd burner

Dimension of 3rd heating element (in

Power of 3rd heating element (kW)

Power of 3rd burner (BTU)

Dimension of 4th heating element (in

Power of 4th heating element (kW)

Power of 4th burner (BTU)

Dimension of 5th heating element (in

Power of 5th heating element (kW)

2.6

Power of 5th burner

Dimension of 6th heating element (in

Power of heating element (kW in boost)

[3.7]

3.7

Power of 3rd heating element (kW in boost)

Power of 4th heating element (kW in boost)

Power of 5th heating element (kW in boost)

[3.7]

Power of 6th heating element (kW in boost)

[3.7]

Power of 6th heating element (kW in boost)

Connection rating

7400

Gas connection rating

Fuse protection

Voltage

220-240

Frequency

60; 50

Universal Product Code

Main colour of product

Black

Energy input

Electric

Gas tune

## Connection

Total connected load 7.4 KW.

Connecting cable 1.5 m without plug.



Power consumption standby/display off 0.5 W.

Power consumption standby/network 2.0 W.


Please check the user manual for how to switch off the WiFi module.

# GAGGENAU

View from above

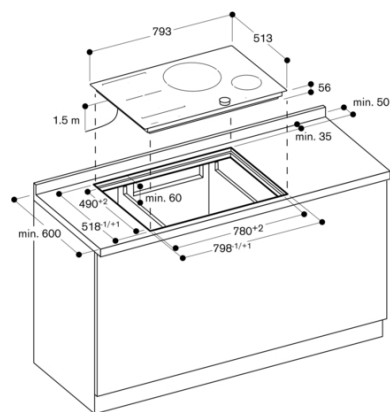

Longitudinal section

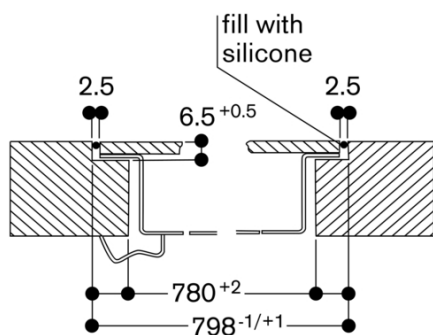

Cross section

