



**CI290110**  
**Flex induction cooktop 200 series**  
**Stainless steel frame**  
**Width 90 cm**

**Sturdy stainless steel frame**  
**Flex function for combining the rectangular cooking areas**  
**Free positioning of cookware inside combined cooking areas**  
**Professional cooking function for splitting the cooktop into predefined heat areas**  
**Cooking sensor function for temperature control in pots**  
**Frying sensor function for temperature control in pans**  
**Suitable for 60 cm deep worktops in combination with AL 400 table ventilation**  
**Twist-Pad control with removable magnetic knob**  
**Easy control of all functions with bicoloured display**

**Cooking zones**  
2 flex induction cooking areas 19x21 cm (2200 W, with booster 3700 W), linked together 38x21 cm (3300 W, with booster 3700 W).  
1 induction cooking zone ø 28 cm (2600 W, with booster 3700 W).

**Handling**  
Twist-Pad control with removable magnetic knob.  
User friendly control with bicoloured display (white / orange).  
Cooking zone and cooking area marking.  
Electronic power control in 17 output levels.

**Features**  
Flex function for rectangular cooking areas.  
Professional cooking function.  
Cooking sensor function (in use with cooking sensor CA 060 300).  
Frying sensor function.  
Booster function for pots.  
Booster function for pans.  
Keep warm function.  
Stopwatch.  
Cooking timer for up to 99 minutes.  
Short-term timer.  
Options menu.  
Power management.

**Safety**  
Main switch.  
Operation indicator.  
Pot detection.  
2-stage residual heat indication.  
Child lock.  
Safety shut-off.


**Planning notes**  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
The wok pan WP 400 001 cannot be used with this appliance.  
Immersion depth 55 mm.  
Intermediate shelf is recommended.  
Appliance must be fixed from underneath.  
Cooktop clamping range: 20 - 40 mm.  
Appliance weight: approx. 15 kg.

**Connection**  
Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.

**Characteristics**  
**Product name/family**  
Cooking zone ceramic  
**Construction type**  
Built-in  
**Energy input**  
Electric  
**Total number of positions that can be used at the same time**  
3  
**Type of control setting devices**  
**Required niche size for installation (HxWxD)**  
55 x 880-880 x 330-330  
**Width of the product (mm)**  
908  
**Dimensions of the product (mm)**  
55 x 908 x 360  
**Dimensions of the packed product (HxWxD) (mm)**  
126 x 1031 x 472  
**Net weight (kg)**  
14.575  
**Gross weight (kg)**  
15.7  
**Residual heat indicator**  
Separate  
**Location of control panel**  
Hob front  
**Type of external control possibility**  
**Basic surface material**  
Ceramic  
**Color of surface**  
Black, Stainless steel  
**Color of frame**  
Stainless steel  
**Approval certificates**  
AENOR, CE  
**Length electrical supply cord (cm)**  
150  
**Knob Material**  
Full metal  
**Sealed Burners**  
No  
**heating with booster**  
All  
**Type of pan support**  
**Natural Gas Connection Rating (BTU)**  
**LP Gas Connection Rating (BTU)**  
**Dimension of 1st heating element (in)**  
**Power of heating element (kW)**  
**Power of 1st burner (BTU)**  
**Dimension of 2nd heating element (in)**  
**Power of 2nd heating element (kW)**  
2.6  
**Power of 2nd burner (BTU)**  
**Dimension of 3rd heating element (in)**  
**Power of 3rd heating element (kW)**  
**Power of 3rd burner (BTU)**  
**Dimension of 4th heating element (in)**  
**Power of 4th heating element (kW)**  
**Power of 4th burner (BTU)**  
**Dimension of 5th heating element (in)**  
**Power of 5th heating element (kW)**  
**Power of 5th burner (BTU)**  
**Dimension of 6th heating element (in)**  
**Power of heating element (kW in boost)**  
[3.7]  
**Power of 2nd heating element (kW in boost)**  
**Power of 3rd heating element (kW in boost)**  
**Power of 4th heating element (kW in boost)**  
**Power of 5th heating element (kW in boost)**  
**Power of 6th heating element (kW in boost)**  
**Consumption and connection features**  
**Electrical connection rating (W)**  
7400  
**Gas connection rating (W)**  
**Current (A)**  
**Voltage (V)**  
220-240  
**Frequency (Hz)**  
60; 50  
**Universal Product Code**  
**Main colour of product**

**Color Variants**  
**CI290110**  
**Stainless steel frame**  
**Width 90 cm**

**Optional accessories**  
**CA051300**  
**Teppan Yaki plate made of multi ply material**  
**CA052300**  
**Griddle plate in cast aluminium**  
**CA060300**  
**Cooking sensor for temperature regulation within pots**  
**CA230100**  
**Black magnetic knob for induction cooktop 200 series**  
**GP900001**  
**Stainless steel frying sensor pan**  
**GP900002**  
**Stainless steel frying sensor pan**  
**GP900003**  
**Stainless steel frying sensor pan**

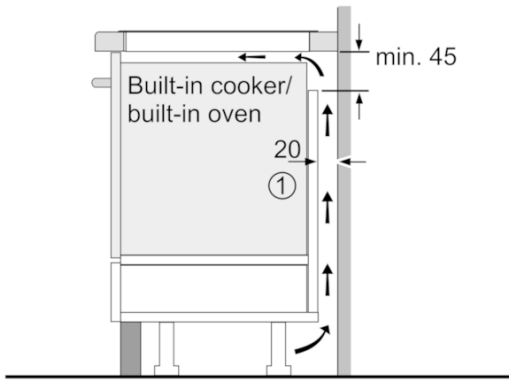

①  
Ventilation gap must  
be present

All measurements in mm

