



CI292602

Optional accessories

CA051301:

Teppan Yaki

CA060600:

Wireless temperature sensor for cooktop

CA230100:

Magnetic knob, black

installation accessories

Flex induction cooktop 200 series 36"

CI292602

Frameless for flush mounting.

Flex function for combining the rectangular cooking areas

Flexible positioning of cookware inside combined cooking areas

Cooking sensor function for temperature control in pots

Frying sensor function for temperature control in pans

Large cooking zone for pots up to ø 32 cm

Twist-Pad control with removable magnetic knob

Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas 21.5x19 cm (2200 W, with booster 3600 W), linked together
21.5x38 cm (3300 W, with booster 3600 W).

2 flex induction cooking areas 21.5x19 cm (2200 W, with booster 3600 W), linked together
21.5x38 cm (3300 W, with booster 3600 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.

Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.

Cooking sensor function (in use with cooking sensor CA 060 600).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Main switch.

Operation indicator.

Pot detection.

2-stage residual heat indication.

Child lock.

Safety shut-off.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Appliance must be fixed from underneath.

Appliance weight: approx. 26 kg.

Connection


Total connected load 9.4 KW.

Total Amps: 50 A.

208 - 240 V / 60 Hz.


Connecting cable 0.96 m without plug.

Please check the user manual for how to switch off the WiFi module.

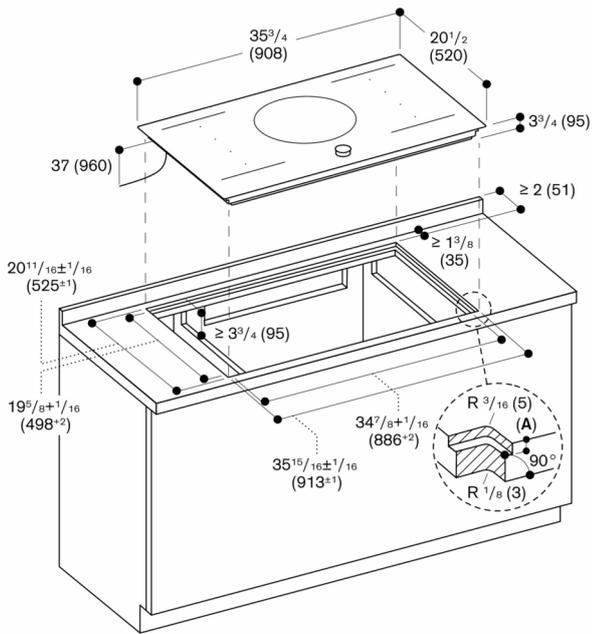


A: 1/4" (6.5^{+0.5} mm)
 Measurements in inches (mm)

View from above

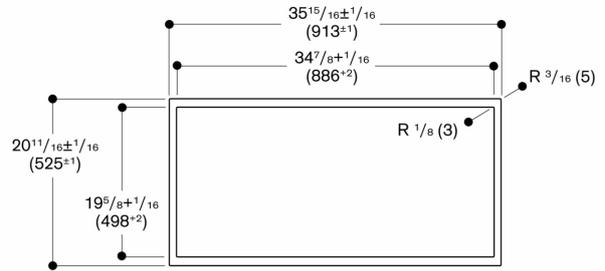


Measurements in inches (mm)

Cross section

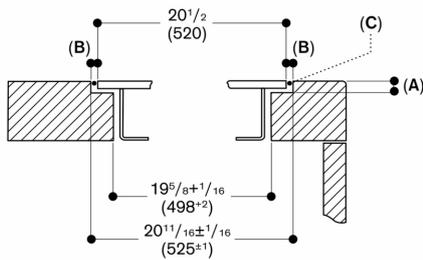

A: 1/4" (6.5^{+0.5} mm)
 B: 1/8" (2.5 mm)
 C: Fill with silicone
 Measurements in inches (mm)

Longitudinal section

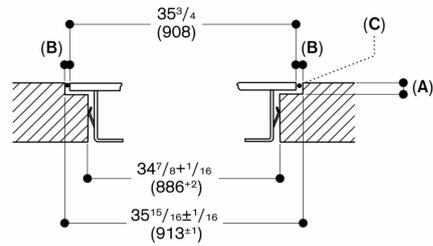

A: 1/4" (6.5^{+0.5} mm)
 B: 1/8" (2.5 mm)
 C: Fill with silicone
 Measurements in inches (mm)