



Color Variants

CM450710  
Stainless steel behind glass-backed  
glass frontage  
Width 60 cm

Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

CM450710  
Fully automatic espresso machine 400 series  
Stainless steel behind glass-backed glass frontage  
Width 60 cm  
Controls at the top

Handleless door / automatic door opening  
Continuous flow heater means no waiting time and constant brewing temperature  
Aroma brewing technology for a full aroma  
Single portion cleaning  
TFT touch display  
Panel-free appliance with surface control module  
One-touch operation  
Personalisation function  
7 light settings  
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage  
Ristretto / 2 x Ristretto.  
Espresso / 2 x Espresso.  
Espresso Macchiato / 2 x Espresso Macchiato.  
Coffee / 2 x Coffee.  
Americano / 2 x Americano.  
Caffe Latte / 2 x Caffe Latte.  
Latte Macchiato / 2 x Latte Macchiato.  
Cappuccino / 2 x Cappuccino.  
Flat White / 2 x Flat White.  
Milk froth / 2 x Milk froth.  
Warm milk / 2 x Warm milk.  
Hot water / 2 x Hot water.

Handling  
Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Personalisation function, option to save 8 individualised beverages.  
4 beverage size settings, volume can be individually adjusted to match the size of the cup.  
8 coffee strength levels from very mild to extra strong.  
3 coffee and hot water temperature levels.  
4 coffee-milk ratio levels.  
Adjustable grinding level.  
Height-adjustable coffee dispenser 7 cm to 15 cm.  
Easy access to water tank, milk and coffee bean container behind the door.

Features  
Maintenance-free grinding unit with ceramic discs.  
Separate drawer for second ground coffee type.  
Water pump with 19 bar pressure.  
Double grinding and brewing cycles for extra intensity for single beverage order.  
For double beverage order, two grinding and brewing cycles.  
Beverage dispenser with integrated milk system.  
Insulated stainless steel milk container for up to 0.5 litres.  
Integrated lightning with LEDs.  
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.  
Automatic adjustment of ground coffee quantity.  
Removable 2.4 litre water tank.  
Electronic water filter exchange indicator.

Characteristics
Built-in / Free-standing
Built-in
Frothing nozzle
No
Display
No
Water protection system
no
Portion sizes
All cups
Dimensions
455 x 590 x 444
Dimensions of the packed product (HxWxD)
540 x 670 x 670
Required niche size for installation (HxWxD)
449 x 558 x 347
Hot water spout
No
Adjustable programs
Standby function
Yes
Pump pressure
19
Simultaneous preparation of 2 cups
Yes
Included accessories
1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories
Electrical connection rating
1600
Fuse protection
10
Voltage
120
Frequency
60
Plug type
120V-3 prong
Product group
Built-in coffee machine
Brand
Gaggenau
Product name/family
Product name / Commercial code
CM450710
Universal Product Code
825225922254
Main colour of product
Stainless steel behind glass
Typology
Fully automatic
UL
Length electrical supply cord
100.0
Length of electrical supply cord (in)
39"
Reccommended height for installation (in)
17 11/16"
Reccommended height for installation
449
Appliance Dimensions (h x w x d) (in)
17 59/64" x 23 15/64" x 17 31/64"
Dimensions
455 x 590 x 444
Dimensions of the packed product
Dimensions of the pallet (in)
Dimensions of the packed product (HxWxD)
540 x 670 x 670
79
Net weight
35.881
90
Gross weight
40.6
Capacity water container
2.4

Consumption and connection features  
2021-10-01  
Page 1

Electronic fill level control for drip tray and container for coffee residue.

Safety  
Child lock.


Cleaning  
Fully automatic rinse programme when machine is turned on/off.  
Automatic steam cleaning of the milk system after every beverage.  
Automatic cleaning and descaling programme.  
Emptying programme to prepare the appliance for holiday or transportation.  
Removable brewing unit.  
Dishwasher-safe coffee residue container and drip tray.  
Dishwasher-safe beverage dispenser.

Planning notes  
Ideal installation height 95 cm to 145 cm (top edge of niche bottom).  
The door panel surface of the appliance extends 47 mm from the furniture cavity.  
When installing in a corner a side clearance is required.  
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.  
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.  
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).  
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.  
Special accessories (order as spare parts):  
Part No. 12008246 Water filter  
Part No. 00311820 Descaling tablets  
Part No. 00311823 Cleaning tablets  
Part No. 00636455 Door hinge restrictor (92° opening angle)  
Part No. 11015223 Bean container with lid

Connection  
Total connected load 1.6 KW.  
Connection cable 1.0 m, pluggable.

CM450710
Fully automatic espresso machine 400 series
Stainless steel behind glass-backed glass frontage
Width 60 cm
Controls at the top
2021-10-01
Page 2

### Left corner installation

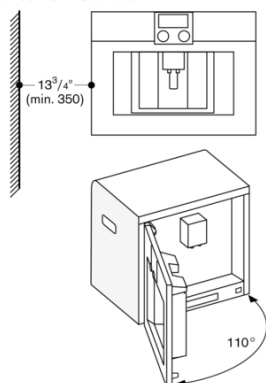

If using the 92° door-hinge restrictor (spare part no. 00636455), the minimum distance to the wall is only 3<sup>15</sup>/<sub>16</sub>" (100 mm).

