



Color Variants

CMP250102C

CMP250112C

CMP250132C

Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

Handless door / cushioned door closing system
Continuous flow heater means no waiting time and constant brewing temperature.
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation.
Personalisation function
7 light settings
Electronic fill level control for milk, water and coffee beans for a perfect result.

Type of beverage

- Ristretto / 2 x Ristretto.
- Espresso / 2 x Espresso.
- Espresso Macchiato / 2 x Espresso Macchiato.
- Coffee / 2 x Coffee.
- Americano / 2 x Americano.
- Caffe Latte / 2 x Caffe Latte.
- Latte Macchiato / 2 x Latte Macchiato.
- Cappuccino / 2 x Cappuccino.
- Flat White / 2 x Flat White.
- Milk froth / 2 x Milk froth.
- Warm milk / 2 x Warm milk.
- Hot water / 2 x Hot water.

Handling

- Door with cushioned door closing system.
- Rotary knob and TFT touch display operation.
- Clear text display.
- Personalisation function, option to save 8 individualised beverages.
- 4 beverage size settings, volume can be individually adjusted to match the size of the cup.
- 8 coffee strength levels from very mild to extra strong.
- 3 coffee temperature levels.
- 10 hot water temperature levels.
- 4 coffee-milk ratio levels.
- Adjustable grinding level.
- Height-adjustable beverage dispenser 7 cm to 15 cm.
- Easy access to water tank, milk and coffee bean container behind the door.

Features

- Maintenance-free grinding unit with ceramic discs.
- Separate drawer for second ground coffee type.
- Water pump with 19 bar pressure.
- Double grinding and brewing cycles for extra intensity for single beverage order.
- For double beverage order, two grinding and brewing cycles.
- Beverage dispenser with integrated milk system.
- Insulated stainless steel milk container for up to 0.5 litres.
- Integrated lightning with LEDs.
- Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
- Automatic adjustment of ground coffee quantity.
- Removable 2.4 litre water tank.
- Electronic water filter exchange indicator.

Characteristics

Built-in / Free-standing
Built-in
Frothing nozzle
No
Display
Yes
Water protection system
no
Dimensions
455x590x426
Dimensions of the packed product (HxWxD)
540x475x670
Hot water spout
No
Adjustable programs
Standby function
Yes
Simultaneous preparation of 2 cups
Yes
Included accessories
1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories
Fuse protection
10
Voltage
220-240
Frequency
50/60
Plug type
Gardy plug w/ earthing
Product group
Built-in coffee machine
Product name/family
Built-in coffee machine
Product name / Commercial code
CMP250102C
Universal Product Code
Typology
Fully automatic
Length electrical supply cord
170
Length of electrical supply cord (in)
Maximum height for installation
449
Appliance Dimensions (h x w x d) (in)
Dimensions
455x590x426
Dimensions of the packed product
Dimensions of the pallet (in)
Dimensions of the packed product (HxWxD)
540x475x670
Net weight
44.000
Net weight
20.1
Gross weight
50.000
Gross weight
22.6
Capacity water container
2.4

Consumption and connection features

2025-12-12

Page 1

Electronic fill level control for drip tray and container for coffee residue.
Hint: for energy-saving, the appliance switches to standby mode automatically after about 30 minutes.
This timespan can be changed in the basic settings.

Selected digital services (Gaggeneau Home Connect)

Coffee World: extended choice of coffee specialities from all over the world.
Remote control and monitoring.
Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.
Automatic steam cleaning of the milk system after every milk-based beverage.
Automatic cleaning and descaling programme.
Emptying programme to prepare the appliance for holiday or transportation.
Empty-grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Dishwasher-safe coffee residue container and drip tray.
Dishwasher-safe beverage dispenser.


Planning notes

Door hinge not reversible.
Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
The LAN port can be found at the back on the lower right side.
Special accessories (order as spare parts):
Part No. 17000706 Water filter
Part No. region-specific Descaling tablets
Part No. region-specific Cleaning tablets
Part No. 00636455 Door hinge restrictor (92° opening angle)
Part No. 11015223 Bean container with lid


Connection

Total connected load 1.6 KW.
Connection cable 1.7 m with plug.
Plan a LAN cable.
Power consumption standby/display off 0.5 W.
Power consumption standby/network 2.0 W.
Time auto-standby/display off 30 min.
Time auto-standby/network 30 min.
Please check the user manual for how to switch off the WiFi module.

GAGGENAU

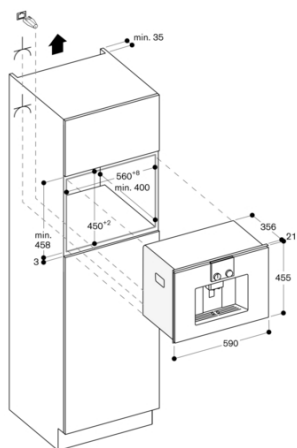

Left corner installation

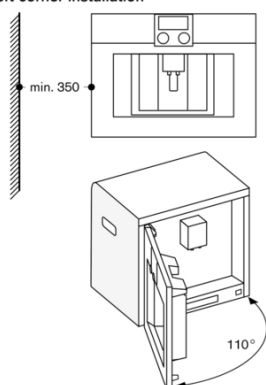

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.