



CMP250711
Fully automatic espresso machine 200 series
Full glass door in Gaggenau Metallic
Width 60 cm
Controls at the top

Handless door / cushioned door closing system
 Continuous flow heater means no waiting time and constant brewing temperature
 Aroma brewing technology for a full aroma
 Single portion cleaning
 TFT touch display
 Panel-free appliance with surface control module
 One-touch operation
 Personalisation function
 7 light settings
 Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
 Espresso / 2 x Espresso.
 Espresso Macchiato / 2 x Espresso Macchiato.
 Coffee / 2 x Coffee.
 Americano / 2 x Americano.
 Caffe Latte / 2 x Caffe Latte.
 Latte Macchiato / 2 x Latte Macchiato.
 Cappuccino / 2 x Cappuccino.
 Flat White / 2 x Flat White.
 Milk froth / 2 x Milk froth.
 Warm milk / 2 x Warm milk.
 Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.
 Rotary knob and TFT touch display operation.
 Clear text display.
 Personalisation function, option to save 8 individualised beverages.
 4 beverage size settings, volume can be individually adjusted to match the size of the cup.
 8 coffee strength levels from very mild to extra strong.
 3 coffee and hot water temperature levels.
 4 coffee-milk ratio levels.
 Adjustable grinding level.
 Height-adjustable coffee dispenser 7 cm to 15 cm.
 Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
 Separate drawer for second ground coffee type.
 Water pump with 19 bar pressure.
 Double grinding and brewing cycles for extra intensity for single beverage order.
 For double beverage order, two grinding and brewing cycles.
 Beverage dispenser with integrated milk system.
 Insulated stainless steel milk container for up to 0.5 litres.
 Integrated lightning with LEDs.
 Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
 Automatic adjustment of ground coffee quantity.
 Removable 2.4 litre water tank.
 Electronic water filter exchange indicator.

Characteristics

Built-in / Free-standing
 Built-in
Frothing nozzle
 No
Display
 No
Water protection system
 no
Portion sizes
 All cups
Dimensions
 455 x 590 x 426
Dimensions of the packed product (HxWxD)
 540 x 670 x 670
Required niche size for installation (HxWxD)
 449 x 558 x 356
Hot water spout
 No
Adjustable programs
Standby function
 Yes
Pump pressure
 19
Simultaneous preparation of 2 cups
 Yes
Included accessories
 1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories
Electrical connection rating
 1600
Fuse protection
 10
Voltage
 120
Frequency
 50/60
Plug type
 Gardy plug w/ earthing
Product group
 Built-in coffee machine
Brand
 Gaggenau
Product name/family
Product name / Commercial code
 CMP250711
Universal Product Code
 825225936985
Main colour of product
 Metallic
Typology
 Fully automatic
 UL
Length electrical supply cord
 100.0
Length of electrical supply cord (in)
 39"
Recommended height for installation (in)
 17 11/16"
Recommended height for installation
 449
Appliance Dimensions (h x w x d) (in)
 17 15/16" x 23 1/4" x 16 3/4"
Dimensions
 455 x 590 x 426
Dimensions of the packed product
Dimensions of the pallet (in)
Dimensions of the packed product (HxWxD)
 540 x 670 x 670
 54
Net weight
 24.700
 65
Gross weight
 29.4
Capacity water container
 2.4

Consumption and connection features

2021-09-24
 Page 1

Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.
 Automatic steam cleaning of the milk system after every beverage.
 Automatic cleaning and descaling programme.
 Emptying programme to prepare the appliance for holiday or transportation.
 Removable brewing unit.
 Dishwasher-safe coffee residue container and drip tray.
 Dishwasher-safe beverage dispenser.

Planning notes

Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
 Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 When installing in a corner a side clearance is required.
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
 Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
 Special accessories (order as spare parts):
 Part No. 12008246 Water filter
 Part No. 00311820 Descaling tablets
 Part No. 00311823 Cleaning tablets
 Part No. 00636455 Door hinge restrictor (92° opening angle)
 Part No. 11015223 Bean container with lid

Connection

Total connected load 1.6 KW.
 Connection cable 1.0 m, pluggable.


Color Variants

CMP250711
Full glass door in Gaggenau Metallic
Width 60 cm

Included accessories


1 x assembly screws.
 1 x scoop.
 1 x test strip.
 1 x milk container (insulated).
 1 x connection hose for milk frother.
 1 x milk pipe.

Left corner installation

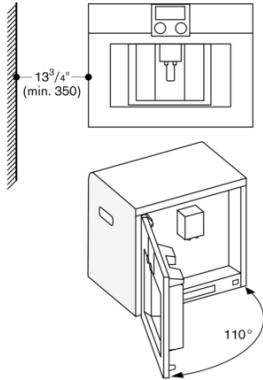

If using the 92° door-hinge restrictor (spare part no. 00636455), the minimum distance to the wall is only $3\frac{15}{16}"$ (100 mm).

Left corner installation

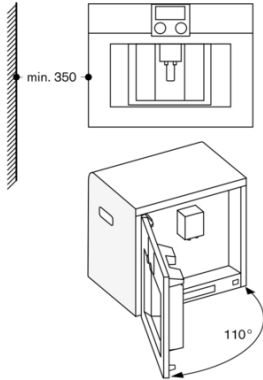

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance from the wall is only 100 mm.

