



**CX480100**  
**Full surface induction cooktop 400 series**  
**Frameless**  
**Width 80 cm**

**One single big cooking surface**  
**Free positioning of cookware**  
**All sizes and formats of cookware can be used**  
**TFT touch display for an intuitive control of all functions**  
**Max. power output for big cookware of up to 4.6 KW**  
**Frameless for flush mounting**

**Cooking zones**  
One unique cooking surface of 2800 cm<sup>2</sup>.  
Up to 4 items of cookware can be placed simultaneously on the cooktop.

**Handling**  
Easy to use colour graphic TFT touch display with use indications.  
Electronic power control in 17 output levels.

**Features**  
Booster function.  
Individual pot detection.  
Cooking timer for each cooking position.  
Timer.  
Information key with use indicators.  
Power management.

**Safety**  
Main switch.  
Residual heat indicator.  
Child lock.  
Safety shut-off.  
Display cleaning protection.

**Planning notes**  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Intermediate shelf is recommended. Appliance must be fixed from underneath.  
Cooktop clamping range: 30 - 50 mm. Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out. Appliance weight: approx. 27 kg.

**Connection**  
Total connected load 7.2 kW.  
Connecting cable 1.5 m without plug.

**Characteristics**  
**Product name/family**  
Cooking zone ceramic  
**Construction type**  
Built-in  
**Energy input**  
Electric  
**Total number of positions that can be used at the same time**  
4  
**Type of control setting devices**  
**Required niche size for installation (HxWxD)**  
76 x 780-798 x 490-518  
**Width of the product (mm)**  
793  
**Dimensions of the product (mm)**  
76 x 793 x 513  
**Dimensions of the packed product (HxWxD) (mm)**  
130 x 1020 x 640  
**Net weight (kg)**  
26.703  
**Gross weight (kg)**  
28.0  
**Residual heat indicator**  
Separate  
**Location of control panel**  
Hob front  
**Type of external control possibility**  
**Basic surface material**  
Color of surface  
anthracite  
**Color of frame**  
**Approval certificates**  
AENOR, CE  
**Length electrical supply cord (cm)**  
150  
**Knob Material**  
**Sealed Burners**  
No  
**heating with booster**  
All  
**Type of pan support**  
**Natural Gas Connection Rating (BTU)**  
**LP Gas Connection Rating (BTU)**  
**Dimension of 1st heating element (in)**  
**Power of heating element (kW)**  
3.6  
**Power of 1st burner (BTU)**  
**Dimension of 2nd heating element (in)**  
**Power of 2nd heating element (kW)**  
**Power of 2nd burner (BTU)**  
**Dimension of 3rd heating element (in)**  
**Power of 3rd heating element (kW)**  
**Power of 3rd burner (BTU)**  
**Dimension of 4th heating element (in)**  
**Power of 4th heating element (kW)**  
**Power of 4th burner (BTU)**  
**Dimension of 5th heating element (in)**  
**Power of 5th heating element (kW)**  
**Power of 5th burner (BTU)**  
**Dimension of 6th heating element (in)**  
**Power of heating element (kW in boost)**  
[4.6]  
**Power of 2nd heating element (kW in boost)**  
**Power of 3rd heating element (kW in boost)**  
**Power of 4th heating element (kW in boost)**  
**Power of 5th heating element (kW in boost)**  
**Power of 6th heating element (kW in boost)**  
**Consumption and connection features**  
**Electrical connection rating (W)**  
7200  
**Gas connection rating (W)**  
**Current (A)**  
**Voltage (V)**  
220-240  
**Frequency (Hz)**  
50; 60  
**Universal Product Code**  
825225915232  
**Main colour of product**  
anthracite  
**Energy input**


**Color Variants**

CX480100  
Frameless  
Width 80 cm


**Optional accessories**

GN232110  
Teppan Yaki plate made of multi ply material,  
GN232230  
Teppan Yaki plate made of multi ply material,

Fill with silicone

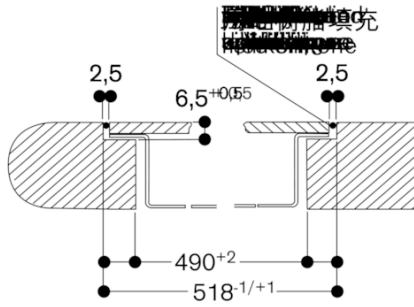

View from above



Longitudinal section

