



**DF261164F**  
**Dishwasher 200 series**  
**Fully integrated**  
**With flexible hinge**  
**Height 86.5 cm**

**Optional door opening at the end of the programme to support the hygienic drying process**  
**6 programmes with aqua sensor and 4 options, such as Power and Intensive:**  
**Clean and dry dishes in 59 minutes**  
**Intensive cleaning in the lower basket while protecting glassware in the upper basket**  
**Flexible basket system with smooth running rails on all levels**  
**TFT display for intuitive handling of all functions**  
**Bright interior lighting**  
**Very quiet: 42 dB**  
**Energy efficiency class A++**  
**Aqua stop with guarantee**

**Handling**  
 TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.  
 Touch key operation.  
 Information key with use indications.  
 Time delay up to 24 hours.  
 Visual and acoustic end of programme indicator.  
 Info-Light.

**Technical Features**  
 Bright interior lighting.  
 Glass protection.  
 Aqua sensor.  
 Load sensor.  
 Detergent recognition.  
 Regeneration electronics.  
 Heat exchanger.  
 Continuous flow heater.  
 Triple filter system.  
 Soft lock.  
 Aqua stop with guarantee.

**Programmes**  
 6 programmes:  
 Auto 35 °C - 45 °C.  
 Auto 45 °C - 65 °C.  
 Auto 65 °C - 75 °C.  
 Eco 50 °C.  
 Quick wash 45 °C (29 min.).  
 Pre-rinse.  
 4 options:  
 Intensive.  
 Power.  
 Half Load.  
 Holiday.

**Features**  
 Flexible basket system with smooth running rails on all levels.  
 Upper basket:  
 Over extension.  
 Rackmatic with 3 levels, adjustable in height up to 5 cm.  
 6 folding spines.  
 4 folding racks.  
 2 glass support bars.  
 Lower basket:  
 8 folding spines.  
 2 folding racks.  
 Dividable glass support.  
 Cutlery basket.  
 Maximum dish sizes (upper/lower basket)  
 29/28, 26.5/30.5 or 24/34 cm respectively.  
 12 place setting capacity.  
 Maximum glass loading capacity 23 wine glasses.

**Consumption data**

**Characteristics**  
**Energy efficiency class**  
**Cleaning performance**  
 A  
**Water consumption (l)**  
 9.5  
**Total annual energy consumption (kWh)**  
**Estimated annual consumption (220 standard cycles) energy (kWh)**  
 198  
**Total annual water consumption (l) 220 days**  
 2090  
**Built-in / Free-standing**  
 Built-in  
**Removable top**  
 No  
**Door panel options**  
 Not possible  
**Height with worktop (mm)**  
 0  
**Height of the product (mm)**  
 865  
**Adjustable feet**  
 Yes - front only  
**Maximum adjustability feet (mm)**  
 60  
**Adjustable plinth**  
**Net weight (kg)**  
 45.688  
**Gross weight (kg)**  
 48.0  
**Connection Rating (W)**  
 2400  
**Current (A)**  
 10  
**Voltage (V)**  
 220-240  
**Frequency (Hz)**  
 50; 60  
**Length electrical supply cord (cm)**  
 175  
**Plug type**  
 Gardy plug w/ earthing  
**Length inlet hose (cm)**  
 165  
**Length outlet hose (cm)**  
 190  
**Hidden heating element**  
 Yes  
**Water protection system description**  
 Triple water protection 24h  
 No  
**Water softener**  
 Yes  
**Top basket type**  
 high 642  
**Adjustable upper basket**  
 Rackmatic 3-stage  
**Upper rack cup shelf**  
**Bottom basket type**  
 high 642  
**Lower rack cup shelf**  
 2  
**3rd Rack**  
 None  
**Silverware Basket**  
 Standard  
**Optional accessories**  
 DA041160, DA042030, DA043000  
**Included accessories 2**  
 baking-sheet spray head grey, s/s decorative strips, vapor barrier plate  
**Number of place settings**  
 12  
**Color / Material panel**  
 Grey  
**Color / Material body**  
**Color / Material top**  
**Dimensions of the packed product (HxWxD) (mm)**  
 920 x 670 x 660  
**Consumption and connection features**  
**Brand**  
 Gaggenau  
**Product name / Commercial code**  
 DF261164F  
**Number of place settings**  
 12  
**Energy efficiency class - NEW**

Energy efficiency class A++ at a range of energy efficiency classes from A++ to D.  
 From 9.5 l water.  
 From 0.9 kwh.  
 Noise level 42 dB (re 1 pW).

**Planning notes**  
 Height-adjustable feet.  
 Appliance plinth recess 100 mm (see drawing).  
 Rear feet adjustable at front.  
 Door weight up to 10 kg.  
 Door panel dimension dependent on plinth height of kitchen furniture.  
 For installation into a tall unit, ventilation openings are recommended (min. 200 cm²).

**Connection**  
 Total connected load 2.4 kW.  
 Connecting cable pluggable.  
 Water connection with 3/4" screw joint.  
 Connection to hot or cold water possible.

**Color Variants**  
 DF261164F  
 Fully integrated  
 With flexible hinge

**Included accessories**  
 1 x baking tray spray head.


**Optional accessories**  
 DA041160  
 Cutlery drawer with smooth running rails  
 DA042030  
 Silvercare cartridge for all dishwashers  
 DA043000  
 Holder for long-stemmed glasses

**Installation Accessories**  
 GH045010  
 Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm  
 GZ010011  
 Extension for water inlet and outlet (2 m long)

DF261164F  
Dishwasher 200 series  
Fully integrated  
With flexible hinge  
Height 86.5 cm

2019-11-08  
Page 2

Connection dimensions for a 60 cm wide dishwasher

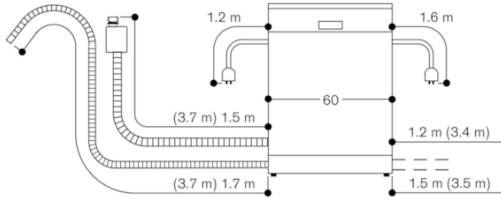

( ) values with extension kit

86.5 cm high dishwasher with flexible hinge

