



DF481161F
Dishwasher 400 series
Fully integrated
With flexible hinge
Height 86.5 cm

Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
8 programmes with aqua sensor and 6 options, such as Power and Intensive:
Clean and dry dishes in 57 minutes
Intensive cleaning in the lower basket while protecting glassware in the upper basket
Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket
TFT display for intuitive handling of all functions
Perfectly illuminated interior
Push-to-open function for perfect integration into handleless furniture fronts
Very quiet: 43 dB
Energy efficiency class A+++
Aqua stop with guarantee

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
 Touch key operation.
 Information key with use indications.
 Time delay up to 24 hours.
 Visual and acoustic end of programme indicator.
 Info-Light.

Technical Features

Perfectly illuminated interior.
 Glass protection with zeolite.
 Aqua sensor.
 Load sensor.
 Detergent recognition.
 Regeneration electronics.
 Heat exchanger.
 Continuous flow heater.
 Triple filter system.
 Soft lock.
 Aqua stop with guarantee.

Programmes

8 programmes:
 Auto 35 °C - 45 °C.
 Auto 45 °C - 65 °C.
 Auto 65 °C - 75 °C.
 Intensive 70 °C.
 Eco 50 °C.
 Night programme.
 Quick wash 45 °C (29 min.).
 Pre-rinse.
 6 options:
 Intensive.
 Power.
 Half Load.
 Hygiene.
 Extra Dry.
 Energy Save.

Features

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.
 Upper basket:
 Over extension.
 Rackmatic with 3 levels, adjustable in height up to 5 cm.
 6 folding spines.
 4 folding racks.
 2 glass support bars.
 Lower basket:
 8 folding spines.
 2 folding racks.
 Dividable glass support.
 Cutlery basket.
 Holder for long-stemmed glasses.

Characteristics

Energy efficiency class
Cleaning performance
 A
Water consumption (l)
 9.5
Total annual energy consumption (kWh)
Estimated annual consumption (220 standard cycles) energy (kWh)
 176
Total annual water consumption (l) 220 days
 2090
Built-in / Free-standing
 Built-in
Removable top
 No
Door panel options
 Not possible
Height with worktop (mm)
 0
Height of the product (mm)
 865
Adjustable feet
 Yes - front only
Maximum adjustability feet (mm)
 60
Adjustable plinth
Net weight (kg)
 50.138
Gross weight (kg)
 53.0
Connection Rating (W)
 2400
Current (A)
 10
Voltage (V)
 220-240
Frequency (Hz)
 50; 60
Length electrical supply cord (cm)
 175
Plug type
 Gardy plug w/ earthing
Length inlet hose (cm)
 165
Length outlet hose (cm)
 190
Hidden heating element
 Yes
Water protection system description
 Triple water protection 24h
Water softener
 Yes
Top basket type
 high 642
Adjustable upper basket
 Rackmatic 3-stage
Upper rack cup shelf
Bottom basket type
 high 642
Lower rack cup shelf
 2
3rd Rack
 None
Silverware Basket
 Standard
Optional accessories
 DA041160, DA042030, DA043000
Included accessories 2
 baking-sheet spray head grey,
 Glasstray, rack gastronorm insert, s/s decorative strips, vapor barrier plate
Number of place settings
 12
Color / Material panel
 Grey
Color / Material body
Color / Material top
Dimensions of the packed product (HxWxD) (mm)
 920 x 680 x 660

Consumption and connection features

Brand
 Gaggenau
Product name / Commercial code
 DF481161F
Number of place settings
 12
Energy efficiency class - NEW

Maximum dish sizes (upper/lower basket)
 29/28, 26.5/30.5 or 24/34 cm respectively.
 12 place setting capacity.
 Maximum glass loading capacity 23 wine glasses.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A++ + to D.
 From 9.5 l water.
 From 0.8 kWh.
 Noise level 43 dB (re 1 pW).

Planning notes

Height-adjustable feet.
 Appliance plinth recess 100 mm (see drawing).
 Rear feet adjustable at front.
 Door weight up to 10 kg.
 Door panel dimension dependent on plinth height of kitchen furniture.
 Installation and usage also with furniture handle possible. The push-to-open function remains active.
 For installation into a tall unit, ventilation openings are recommended (min. 200 cm²).

Connection

Total connected load 2.4 kW.
 Connecting cable pluggable.
 Water connection with 3/4" screw joint.
 Connection to hot or cold water possible.

Color Variants

DF481161F
Fully integrated
With flexible hinge


Included accessories

1 x baking tray spray head.
 1 x GN container insert.
 1 x glass holder rack.

DF481161F
Dishwasher 400 series
Fully integrated
With flexible hinge
Height 86.5 cm

2019-12-19
Page 2

Connection dimensions for a 60 cm wide dishwasher

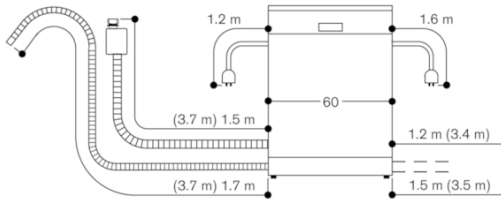

() values with extension kit

86.5 cm high dishwasher with flexible hinge

