



Color Variants

DF481763F
Fully integrated
With flexible hinge

Included accessories

1 x baking tray spray head.
1 x glass holder rack.
1 x GN container insert.

Optional accessories

DA042030
Silvercare cartridge for all dishwashers
DA043000
Holder for long-stemmed glasses

Installation Accessories

DA020110
Stainless steel trim kit for 86.5 cm high dishwashers
GZ010011
Extension for water inlet and outlet (2 m long)

DF481763F
Dishwasher 400 series
Fully integrated
With flexible hinge
Appliance height 86.7 cm / 34 1/8"

Optimal drying with zeolite
8 programmes with aqua sensor and 5 options, such as Power and Intensive
Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket
TFT display for intuitive handling of all functions
Perfectly illuminated interior
Push-to-open function for perfect integration into handleless furniture fronts
Very quiet: 42 dB
Aqua stop
Energy Star qualified

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indications.
Sanitized indicator in the control panel.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Info-Light.

Technical Features

Perfectly illuminated interior.
Glass protection.
Aqua sensor.
Load sensor.
Detergent recognition.
Regeneration electronics.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.
Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Programmes

8 programmes:
Auto 150-160 °F.
Auto 127-140 °F.
Auto 113-122 °F.
Eco 113-136 °F.
Wash and Dry.
Quick Wash 113 °F (30 min).
Glass Care 122 °F.
Pre-rinse.
5 options:
Intensive.
Power.
Half Load.
Hygiene.
Extra Dry with Zeolite.

Features

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.
Cutlery drawer.
Upper basket:
Over extension.
Rackmatic with 3 levels, adjustable in height up to 5 cm.
6 folding spines.
4 folding racks.
2 glass support bars.
Cutlery basket.
Holder for long-stemmed glasses.
Maximum dish sizes (upper/lower basket)

Characteristics
Energy efficiency class
Cleaning performance
Water consumption
Total annual energy consumption
Estimated annual consumption (220 standard cycles) energy
Total annual water consumption 220 days
Built-in / Free-standing
Built-in
Removable top
No
Door panel options
Not possible
Height with worktop
0
Height of the product
867
Adjustable feet
Yes - all from front
Maximum adjustability feet
60
Adjustable plinth
Net weight
55.582
Gross weight
58.0
Connection rating
1440
Fuse protection
12
Voltage
120
Frequency
60
Length electrical supply cord
120
Plug type
Nema5-15P
Length inlet hose
165
Length outlet hose
190
Hidden heating element
Yes
Water protection system description
Triple water protection 24h
Child safety devices
Yes
Water softener
Yes
Top basket type
Adjustable upper basket
Rackmatic 3-stage
Upper rack cup shelf
Bottom basket type
Lower rack cup shelf
3rd Rack
3rd Rack 2.1
Cutlery Basket
Standard
Optional accessories
DA042030, DA043000
Included accessories 2
baking-sheet spray head grey, Glasstray, rack gastronorm insert
Number of place settings
13
Color / Material panel
Grey
Color / Material body
Color / Material top
Dimensions of the product (HxWxD)
867 x 598 x 550
Dimensions of the packed product (HxWxD)
930 x 670 x 660

Consumption and connection features
2022-01-22
Page 1


13 place setting capacity.
Maximum glass loading capacity 23 wine glasses.

Consumption data
Total annual energy consumption 269 kWh.
From 3.5 gallons water.
Noise level 42 dB (re 1 pW).

Planning notes
Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 11 kg.
Door panel dimension dependent on plinth height of kitchen furniture.
Installation and usage also with furniture handle possible. The push-to-open function remains active.


Connection
Total connected load 1440 W.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.

Dishwasher (34 1/8" (867)) with flexible hinge

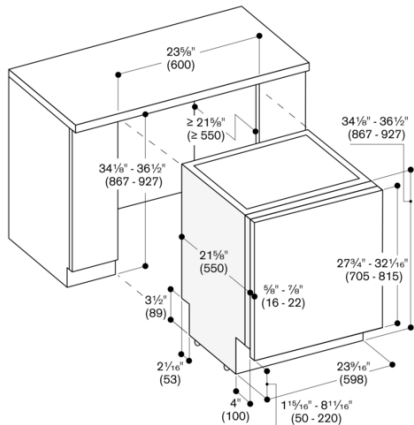

measurements in inches (mm)

Connection dimensions for a 24" (600 mm) wide dishwasher

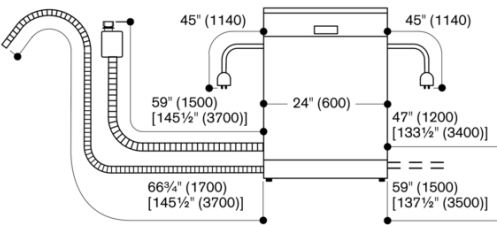

[] values with extension kit

measurements in inches (mm)