



#### Color Variants

**RB280303**  
**With fresh cooling**  
**Fully integrated**

#### Included accessories

2 x cold accumulator.  
2 x egg tray.  
1 x ice cube tray.

#### Optional accessories

**RA430100**  
**Storage container with transparent lid, anthracite.**

#### RB280303

**Fridge-freezer combination 200 series**  
**With fresh cooling**

#### Fully integrated

**Niche width 56 cm, Niche height 177.5 cm**

3 climate zones incl. 1 fresh cooling drawer with manually adjustable humidity  
Height adjustable safety glass shelves  
Door racks with aluminium profiles  
Innovative defrost technology:  
- Reduced energy consumption due to new evaporator design  
- Faster defrosting and easier cleaning due to less severe and more uniform ice build-up  
- Safety glass shelf between freezer drawers  
Cushioned door closing system allowing a soft and controlled door closure  
Net volume 254 litres

#### Handling

Electronic temperature control with digital display.  
Touch keys.

#### Technical Features

Automatic defrosting with defrost water evaporation.  
Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
Open-door and malfunction alarm.

#### Cooling

Fast cooling.  
Temperature adjustable from +2 °C to +8 °C.  
5 safety glass shelves, of which 1 is fully extendable and 4 height adjustable.  
Wine and champagne rack for 4 bottles, can be completely folded.  
1 large door rack with aluminium profile for bottles with flexible bottle holder.  
4 door racks with aluminium profile.  
Bright interior lighting with integrated glare-free side light elements.  
Net volume 187 litres.

#### Fresh cooling

1 full width fresh cooling drawer.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.

#### Freezing

No-frost technology with fast freezing.  
Temperature adjustable from -14 °C to -24 °C.  
4-star freezer compartment.  
Defrost assistance.  
Freezing capacity 8 kg/24 h.  
Storage time after a malfunction 13 h.  
3 freezer drawers, 1 of which extra large.  
2 safety glass shelves.  
Net volume 67 litres.

#### Consumption data

Energy consumption 223 kWh/year.  
Noise level 38 dB (re 1 pW).

#### Planning notes

Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Max. door panel weight:  
Upper door 18 kg.  
Lower door 18 kg.

#### Connection

Total connected load 0.090 KW.  
Connecting cable 2.3 m with plug.

#### Characteristics

<b>Built-in / Free-standing</b>
Built-in
<b>Number of compressors</b>
1
<b>Number of independent cooling systems</b>
2
<b>Width of the appliance</b>
558
<b>Height</b>
<b>Depth of the product</b>
545
<b>Net weight</b>
69.988
<b>Required niche size for installation (HxWxD)</b>
1775.0 x 560 x 550
<b>Door panel options</b>
Not possible
<b>Door hinge</b>
Right reversible
<b>Number of Adjustable Shelves in fridge compartment</b>
4
<b>Shelves for Bottles</b>
Yes
<b>Frost free system</b>
Freezer
<b>Interior ventilator</b>
Yes
<b>Reversible Door Hinge</b>
Yes
<b>Length electrical supply cord</b>
230
<b>Noise level</b>
38
<b>Multi-Flow Air Tower</b>
No
<b>Fast cooling switch</b>
Yes
<b>Fast freezing switch</b>
No
<b>Temperature Controlled Drawer</b>
No
<b>Humidity Control Drawer</b>
Yes
<b>Number of Door Bins - Refrigerator</b>
5
<b>Door bin adjustability - Refrigerator</b>
Yes
<b>Tilt-out door bins in fridge</b>
Yes
<b>Gallon Storage</b>
Yes
<b>Number of Gallon storage</b>
1
<b>Motorized Shelf</b>
No
<b>Material of the shelves</b>
<b>Type of Light</b>
<b>Door opened indicator freezer</b>
Yes
<b>Drawers with telescopic rails</b>
none
<b>Automatic motor-driven ice-maker</b>
No
<b>Ice Storage Capacity</b>
<b>Ice Cubes per Day</b>
<b>Connection rating</b>
90
<b>Fuse protection</b>
10
<b>Voltage</b>
220-240
<b>Frequency</b>
50
<b>Energy consumption</b>
<b>Freezing capacity</b>
8
<b>Storage Period in Event of Power Failure (h)</b>
13
<b>Approval certificates</b>
VDE
<b>Universal Product Code</b>
<b>Main colour of product</b>
N/A
<b>Door panel options</b>
Not possible
<b>Noise level</b>
38

# GAGGENAU

RB280303

Fridge-freezer combination 200 series




With fresh cooling

Fully integrated

Niche width 56 cm, Niche height 177.5 cm

2021-11-09

Page 2

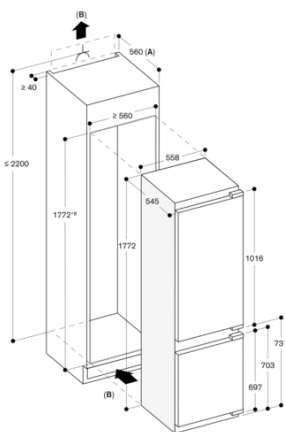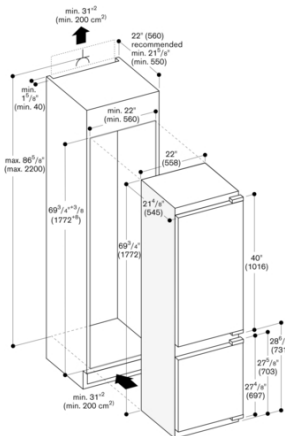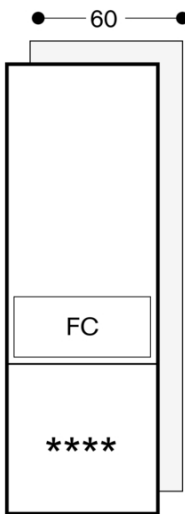

A: 560 mm recommended, min. 550 mm  
B: min. 200 cm<sup>2</sup>  
△ Socket  
measurements in mm